


REV.	DESCRIPTION	DATE
—	RELEASE	Aug. 2, 2001
1		
2		

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.00 + 0.20 \pm 0.30$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.079 + 0.008 \pm 0.012$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.00$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.079$$

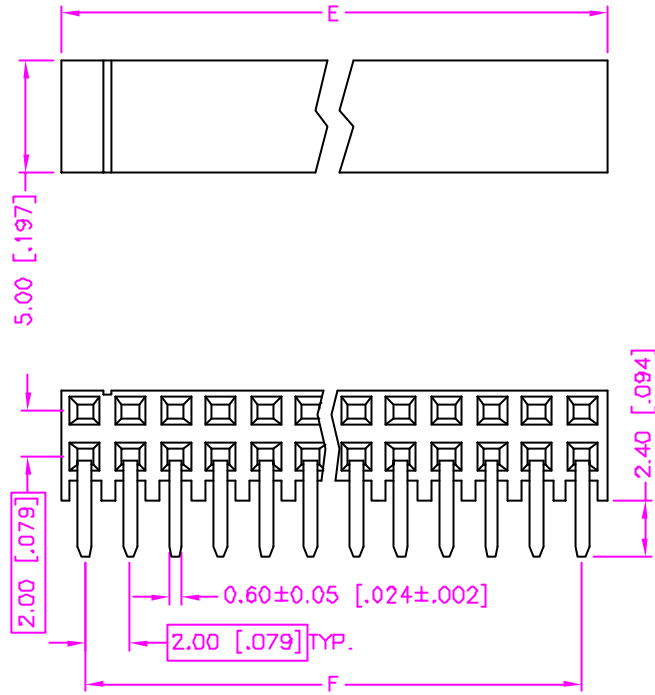



### MATERIALS

1. HOUSING : POLYAMIDE (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.15mm)

### SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

### ORDER INFORMATION :

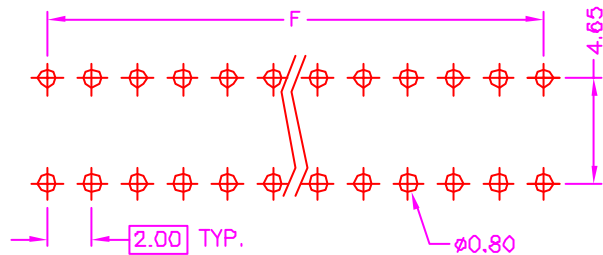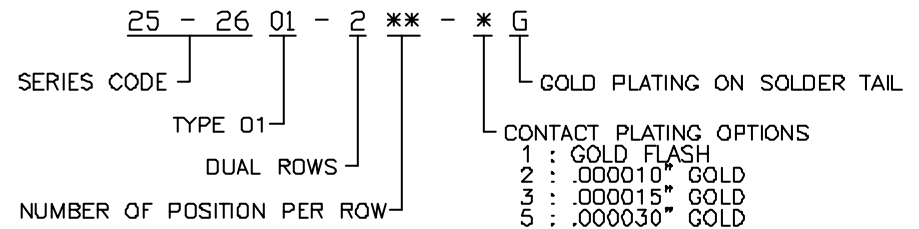

RECOMMEND P.C.B. LAYOUT  
BOTTOM VIEW

TOLERANCE		DRAWER <i>PUG</i>		<b>Astron</b> ASTRON TECHNOLOGY CORP.	
.0=±.0.30 [.012]		CHECK <i>Katherine</i>			
.00=±0.20 [.008]		APP'D <i>ALBT</i>		NAME	
.000=±.XXX		PRODUCT SPEC.		POST HEADER RECEPTACLE	
.0000=±.		315-0053		2.00mm PITCH, P.C.B. MOUNT	
ANG.=±3°		REV. A		HORIZONTAL TYPE	
UNITS : mm [inch]		DRAW NO.		C342-6001	
SCALE	SIZE	SHEET	REV.	13001/'10018	
NGNE	A4	1 DF 1	A		