


REV.	DESCRIPTION	DATE
—	RELEASE	Feb. 07, 2002
1	DRAW MODIFY	Apr. 16, 2003
2		


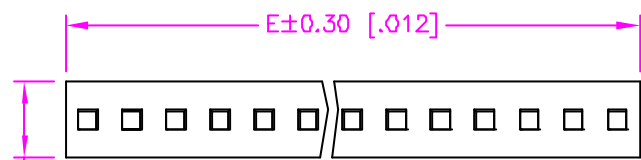


$$E = (\text{NO. OF POSITION PER ROW}) \times 1.27 + 0.38$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.050 + 0.015$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 1.27$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.050$$

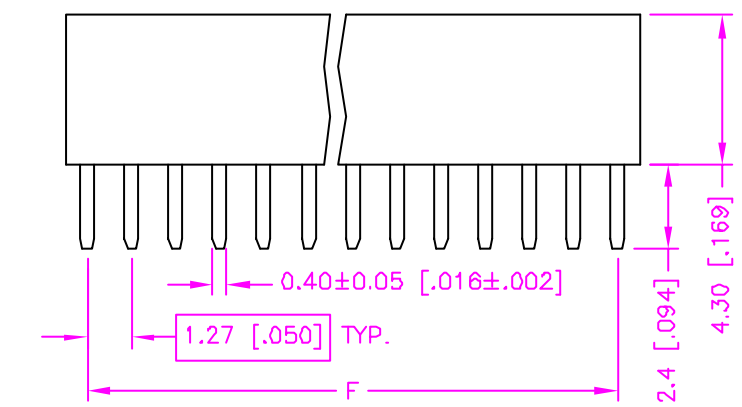



MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY. (t=0.15mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 600V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION :

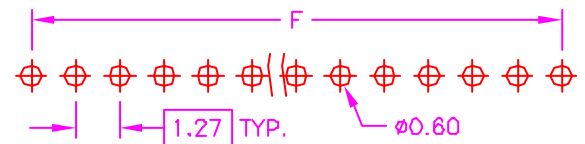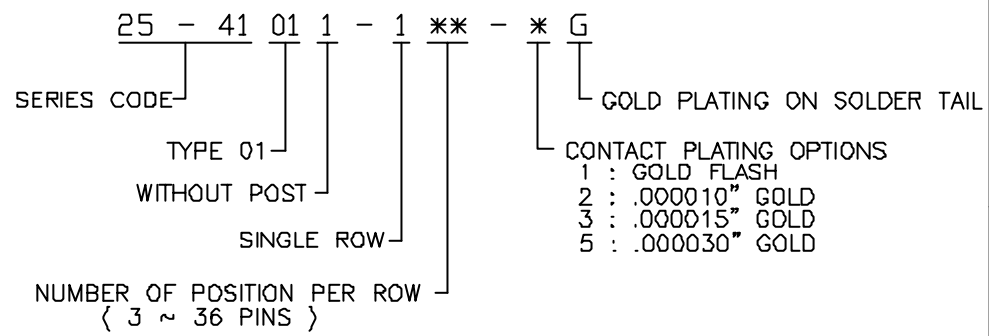

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE		DRAWER		 ASTRON TECHNOLOGY CORP.
.0=±.30 [.012]		SUB		
.00=±.20 [.008]		CHECK		NAME
.000=±.XXX		Katherine		
.0000=±.		APP'D		1.27mm PITCH, P.C.B. MOUNT
ANG.=±3°		ALEX		
		PRODUCT SPEC.		DRAW NO.
UNITS : mm [inch]		—		C343-1003
SCALE	SIZE	SHEET	REV.	13001
NONE	A4	1 OF 1	B	