





REV.	DESCRIPTION	DATE
—	RELEASE	Feb. 07, 2002
1	DRAW MODIFY	Apr. 16, 2003
2		

$$E = (\text{NO. OF POSITION PER ROW}) \times 1.27 + 0.38$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.050 + 0.015$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 1.27$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.050$$

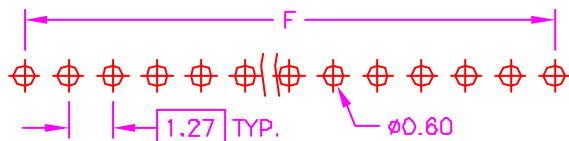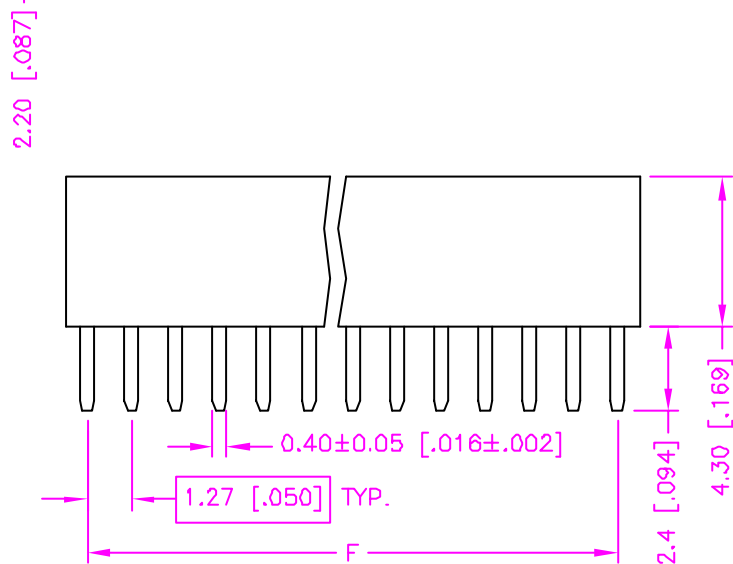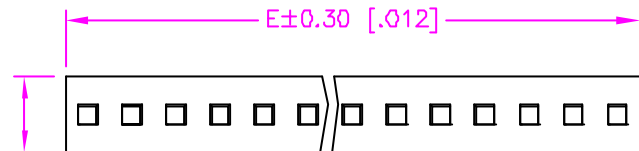

RECOMMEND P.C.B. LAYOUT  
TOP VIEW


### MATERIALS



1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY. (t=0.15mm)

### SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 600V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.
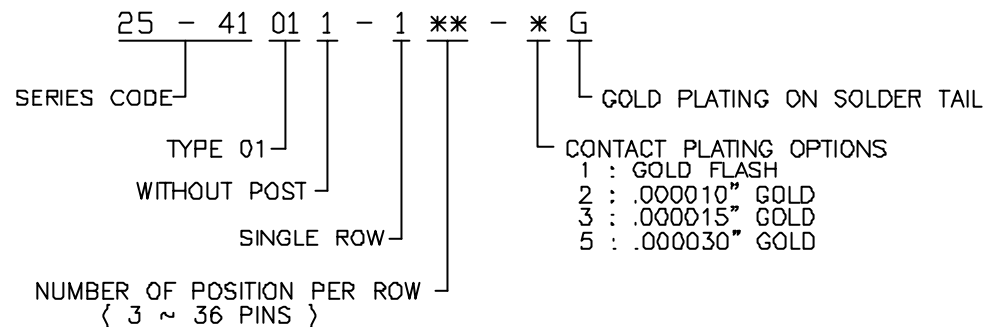
### ORDER INFORMATION :



TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>rub</i>		 <b>ASTRON TECHNOLOGY CORP.</b>
 UNITS : mm [inch]		CHECK <i>Katherine</i>	APP'D <i>ALEX</i>	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. B	DRAW NO. C343-1003
				13001