

REV.	DESCRIPTION	DATE
—	RELEASE	Dec. 13, 2000
1	DRAW MODIFY	Aug. 1, 2001
2	DRAW MODIFY	Jun. 20, 2003

$$E = (\text{NO. OF POSITION PER ROW}) \times 1.27 + 0.40$$




$$(\text{NO. OF POSITION PER ROW}) \times 0.050 + 0.016$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 1.27$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.050$$

$$G = (\text{NO. OF POSITION PER ROW} - 2) \times 1.27$$

$$(\text{NO. OF POSITION PER ROW} - 2) \times 0.050$$

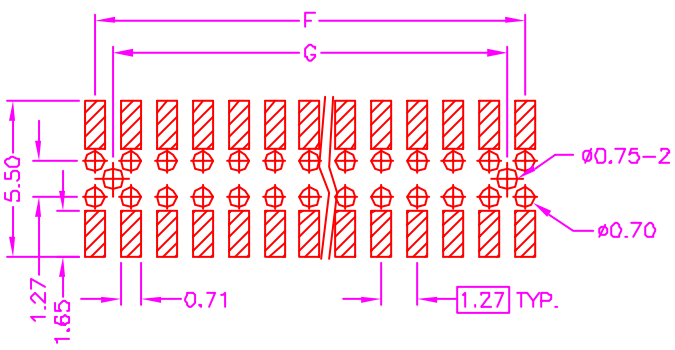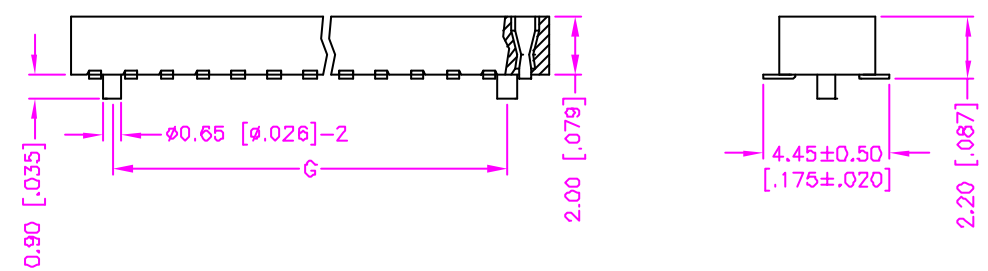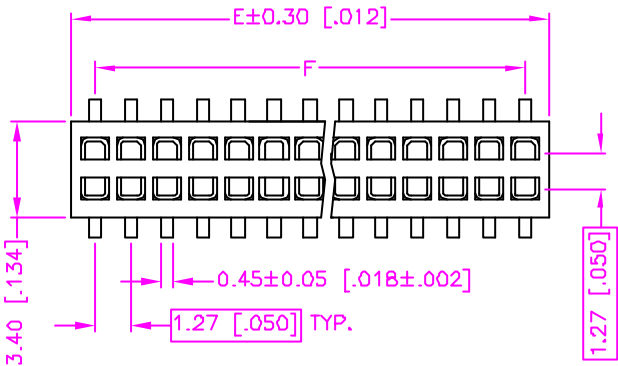

RECOMMEND P.C.B. LAYOUT
TOP VIEW


MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.15mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 600V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.
6. MAX. PROCESSING TEMPERATURE : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :

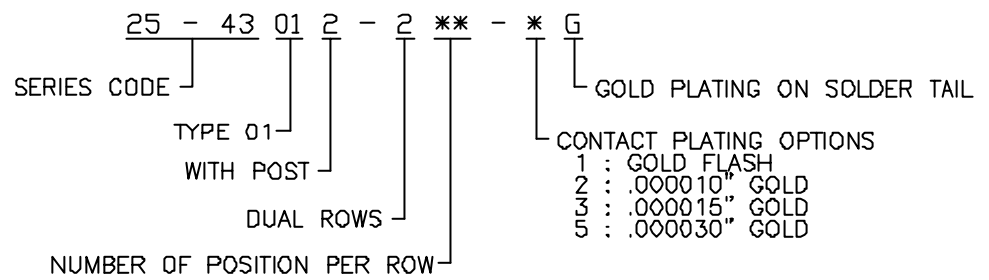

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>Kathelin</i>	ASTRON TECHNOLOGY CORP. NAME POST HEADER RECEPTACLE 1.27*1.27mm PITCH, P.C.B. MOUNT, SMT TYPE (PASS THROUGH - DUAL ENTRY) DRAW NO. C343-3001
UNITS : mm [inch]	CHECK <i>JUS</i>	
SCALE NONE	APP'D <i>LFON</i>	REV. C
SIZE A4	PRODUCT SPEC. —	SHEET 1 OF 1
		REV. C
		13001