


REV.	DESCRIPTION	DATE
—	RELEASE	Jul. 01, 2002
1	DRAW MODIFY	Jan. 07, 2003
2		


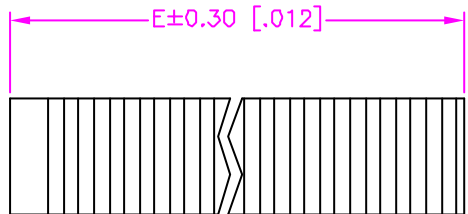


$$E = (\text{NO. OF POSITION PER ROW}) \times 1.27 + 0.40$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.050 + 0.016$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 1.27$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.050$$

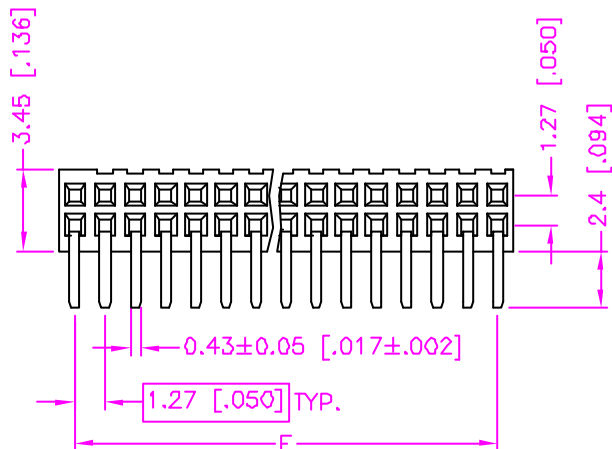



**MATERIALS**

1. HOUSING : POLYAMIDE (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.15mm)

**SPECIFICATION**

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 600V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

**ORDER INFORMATION :**

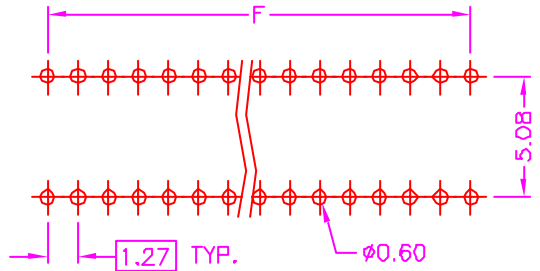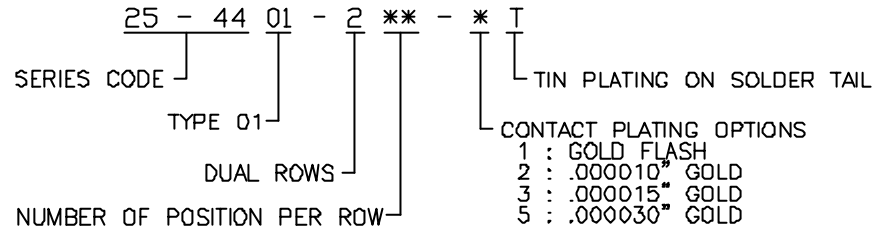

**RECOMMEND P.C.B. LAYOUT  
TOP VIEW**

TOLERANCE .0=±.0.30 [.012] .00=±0.20 [.008] .000=±.xxx .0000=±. ANG.=±3°		DRAWER <i>LJON</i>	 ASTRON TECHNOLOGY CORP.
UNITS : mm [inch]		CHECK <i>Katherine</i>	
SCALE NONE	SIZE A4	APP'D <i>PUB</i>	DRAW NO. C343-4001
SHEET 1 OF 1	REV. B	PRODUCT SPEC. —	315-0061
		10018/13001	