





REV.	DESCRIPTION	DATE
—	RELEASE	Dec. 14, 2000
1	MATERIALS MODIFY	Jun. 1, 2001
2		

$$E = (\text{NO. OF POSITION PER ROW}) \times 1.27 + 0.15 \pm 0.30$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.050 + 0.006 \pm 0.12$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 1.27$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.50$$

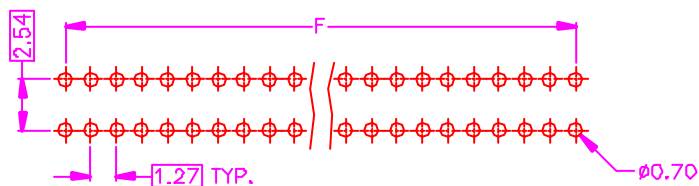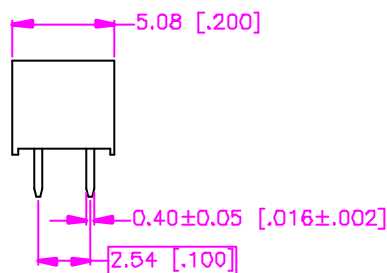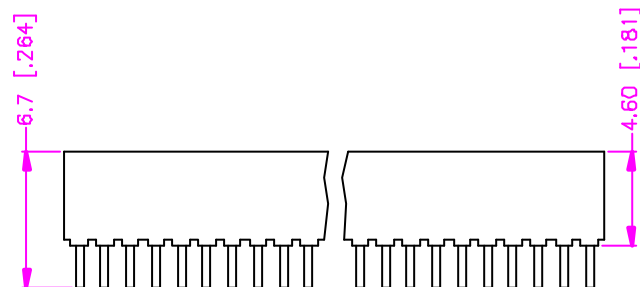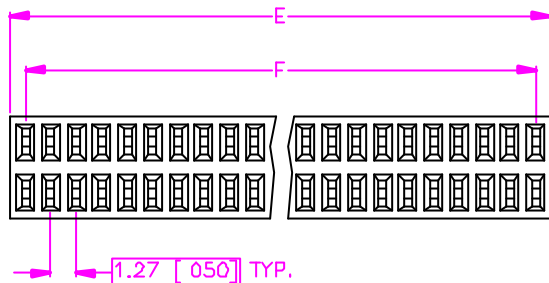

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW


MATERIALS

- HOUSING : POLYAMIDE (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE. (t=0.40mm)

SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 600V AC R M S FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 50V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -55°C ~ +105°C.

ORDER INFORMATION

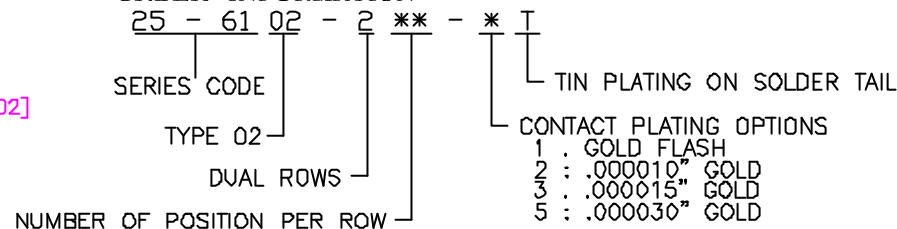

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER JUS CHECK Katharin APP'D WJF&LY	 ASTRON TECHNOLOGY CORP.
 PRODUCT SPEC —	 NAME POST HEADER RECEPTACLE 1.27x2.54mm PITCH P.C.B. MOUNT, VERTICAL	
UNITS : mm [inch]	315-0028	DRAW NO. C344-1001
SCALE NONE	SIZE A4	SHEET 1 OF 1
	REV. G	(A)