


REV.	DESCRIPTION	DATE
—	RELEASE	Oct. 31, 2001
1	MODIFY P/N	Jun. 20, 2002
2		

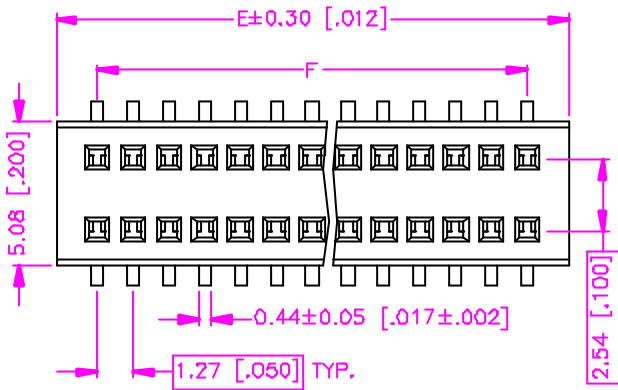

$$E = (\text{NO. OF POSITIONS PER ROW} + 1) \times 1.27$$

$$(\text{NO. OF POSITIONS PER ROW} + 1) \times 0.050$$

$$F = (\text{NO. OF POSITIONS PER ROW} - 1) \times 1.27$$

$$(\text{NO. OF POSITIONS PER ROW} - 1) \times 0.050$$

$$G = (\text{NO. OF POSITIONS PER ROW} - 2) \times 1.27$$

$$(\text{NO. OF POSITIONS PER ROW} - 2) \times 0.050$$

MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.15mm)

SPECIFICATION



1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 600V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.
6. MAX. PROCESSING TEMPERATURE : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :

25 - 63 01 2 - 2 ** - * G

SERIES CODE | TYPE 01 | WITH POST | DUAL ROWS | NUMBER OF POSITIONS PER ROW | GOLD PLATING ON SOLDER TAIL | CONTACT PLATING OPTIONS

CONTACT PLATING OPTIONS:
 1 : GOLD FLASH
 2 : .000010" GOLD
 3 : .000015" GOLD
 5 : .000030" GOLD

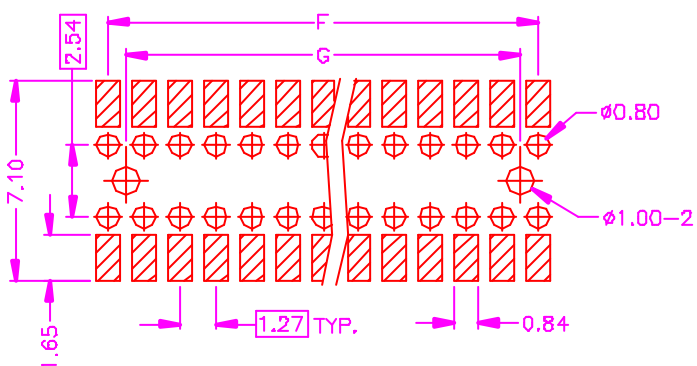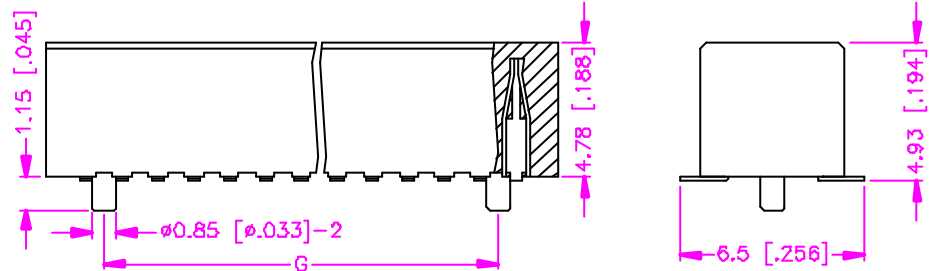

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE		DRAWER	ASTRON
.0±.0.30 [.012]		<i>SUE</i>	
.00±.0.20 [.008]		CHECK	ASTRON TECHNOLOGY CORP.
.000±.XXX		APP'D	NAME
ANG.±3°		<i>ALBY</i>	POST HEADER RECEPTACLE
UNITS : mm [inch]		PRODUCT SPEC.	P.C.B. MOUNT, SMT TYPE
SCALE NONE		SHEET 1 OF 1	DRAW NO. C344-3001
SIZE A4		REV. B	10018