


REV.	DESCRIPTION	DATE
—	RELEASE	May 21, 2002
1		
2		

$$E = (\text{NO. OF POSITIONS PER ROW}) \times 1.27 + 0.23$$

$$F = (\text{NO. OF POSITIONS PER ROW} - 1) \times 1.27$$

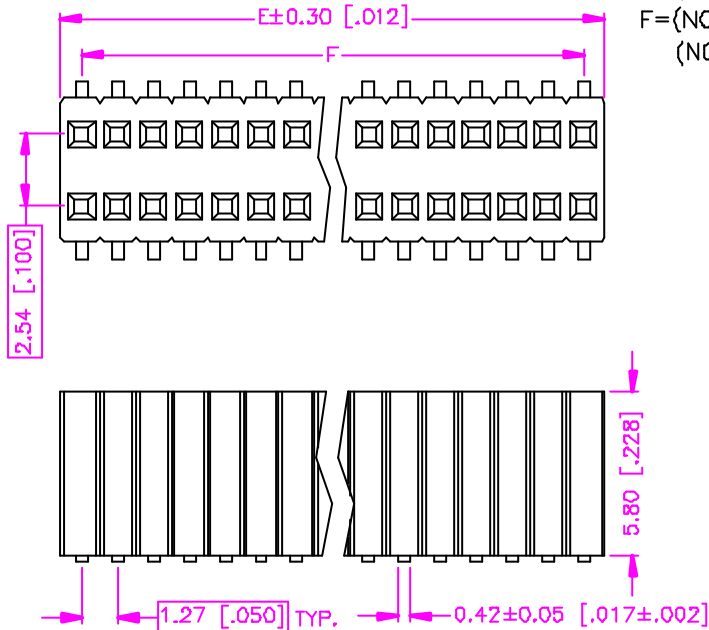

MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.20mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 600V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.
6. MAX. PROCESSING TEMPERATURE : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :


25 - 63 02 1 - 2 ** - * G

SERIES CODE — TYPE 02 — WITHOUT POST — DUAL ROWS — NUMBER OF POSITIONS PER ROW —

GOLD PLATING ON SOLDER TAIL

CONTACT PLATING OPTIONS

- 1 : GOLD FLASH
- 2 : .000010" GOLD
- 3 : .000015" GOLD
- 5 : .000030" GOLD

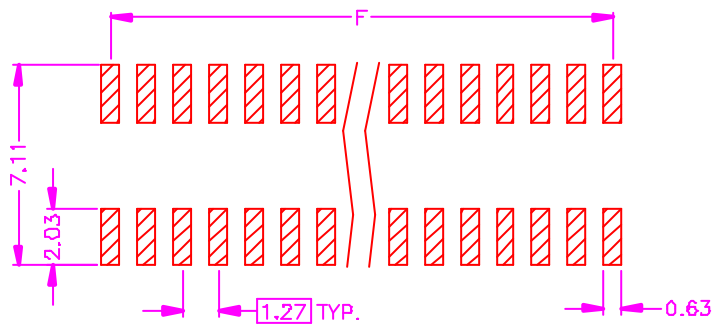

**RECOMMEND P.C.B. LAYOUT
TOP VIEW**

TOLERANCE .0±.0.30 [0.012] .00±.0.20 [0.008] .000±.XXX .0000±. ANG.±3°	DRAWER <i>SUB</i> CHECK <i>Katherlin</i> APP'D <i>ALST</i>	 ASTRON TECHNOLOGY CORP. NAME POST HEADER RECEPTACLE 1.27x2.54mm PITCH, P.C.B. MOUNT, SMT TYPE
UNITS : mm [inch]	PRODUCT SPEC. 316-0013	
SCALE NONE	SIZE A4	DRAW NO. C344-3002
SHEET 1 OF 1	REV. A	13001