

REV.	DESCRIPTION	DATE
A	RELEASE	Nov. 14, 2001
B	DRAW MODIFY	Jan. 14, 2004

MATERIALS





- HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY. {t=0.60mm}

SPECIFICATION

- CURRENT RATING : 2 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN.
AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.

ORDER INFORMATION :

$\frac{25}{\text{SERIES CODE}} - \frac{12}{\text{TYPE 01}} \frac{01}{\text{DUAL ROWS}} - \frac{2}{\text{NUMBER OF POSITIONS PER ROW}} \frac{20}{\text{NUMBER OF POSITIONS PER ROW}} - \frac{2}{\text{GOLD PLATING ON TAIL}} \frac{G}{10\mu\text{" GOLD PLATING ON CONTACT AREA}}$

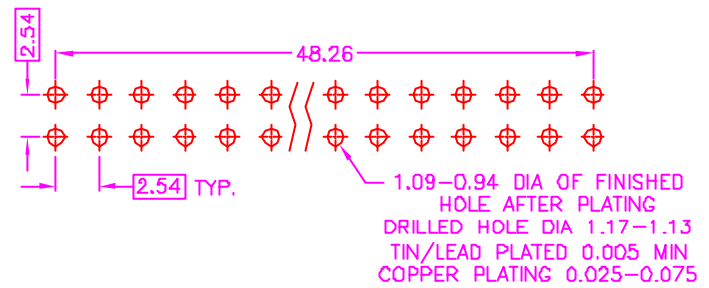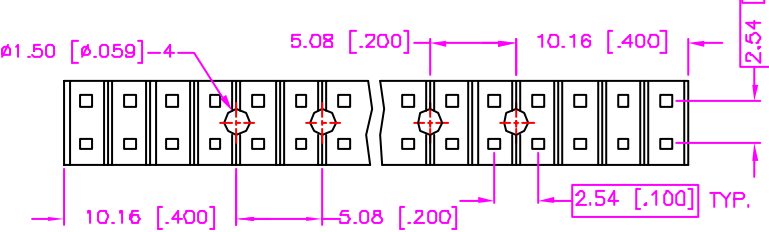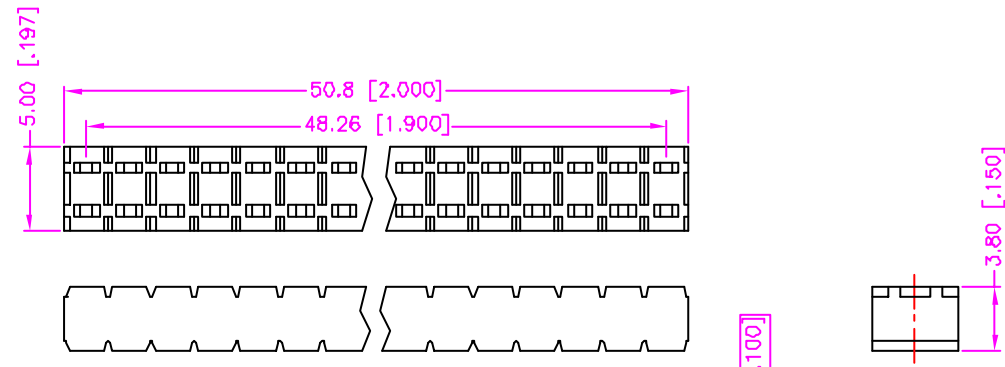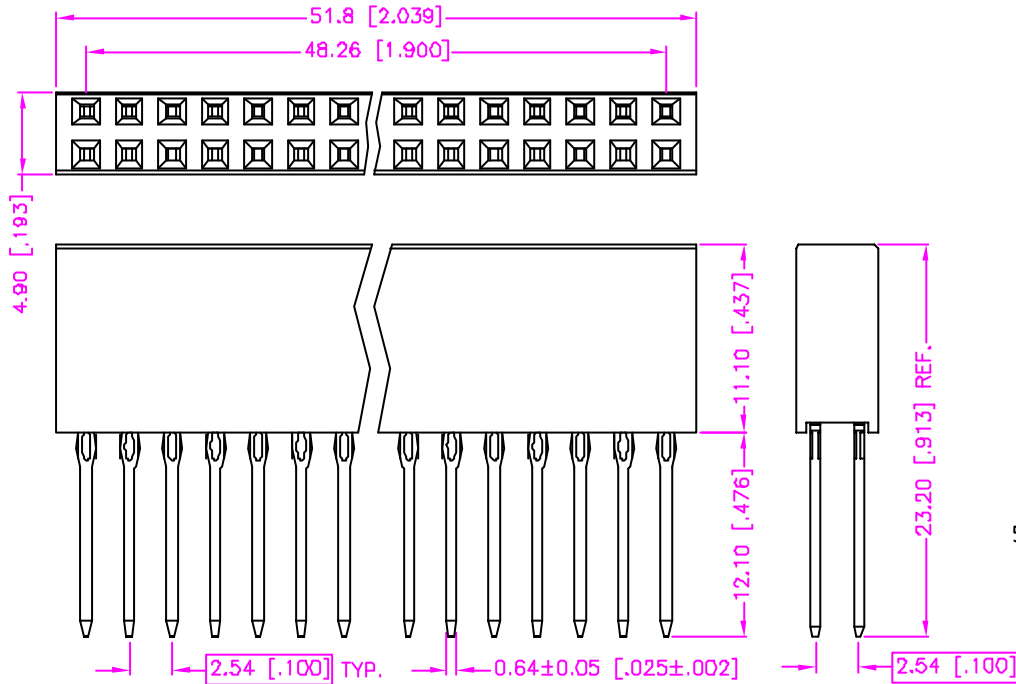

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE .0=±.0.30 [.012] .00=±.0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>Katharina</i> CHECK <i>SUE</i> APP'D <i>LYON</i>	Astron ASTRON TECHNOLOGY CORP. NAME POST HEADER RECEPTACLE 2.54mm PITCH, P.C.B. MOUNT PRESS FIT TYPE
UNITS : mm [Inch] SCALE NONE SIZE A4		PRODUCT SPEC. —	
SHEET 1 OF 1		REV. B	1001B