

REV.	DESCRIPTION	DATE
A	RELEASE	Nov. 14, 2001
B	DRAW MODIFY	Jan. 14, 2004

MATERIALS




- HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY. (t=0.60mm)

SPECIFICATION

- CURRENT RATING : 2 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN.
AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.

ORDER INFORMATION :

25 - 12 01 - 2 32 - 2 G
 SERIES CODE | TYPE 01 | DUAL ROWS | NUMBER OF POSITIONS PER ROW | GOLD PLATING ON TAIL | 10µ" GOLD PLATING ON CONTACT AREA

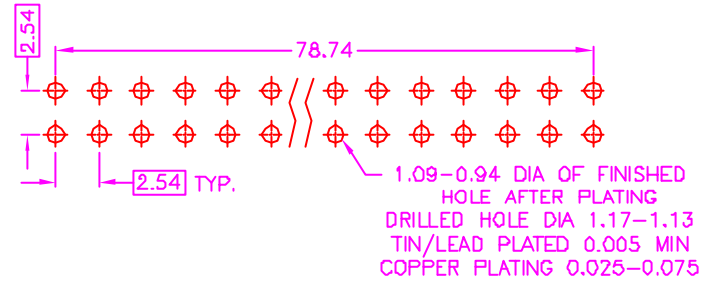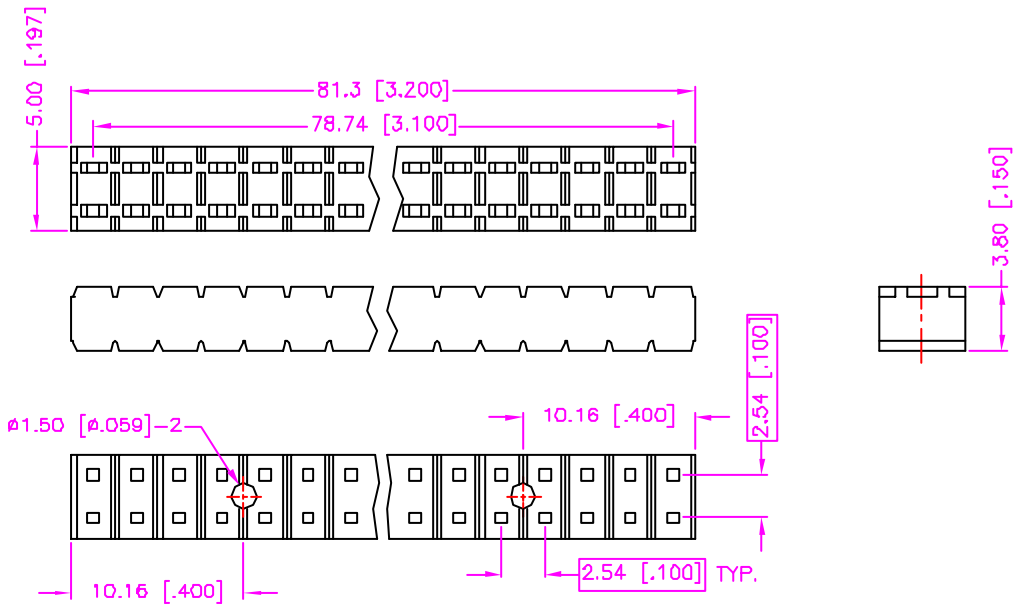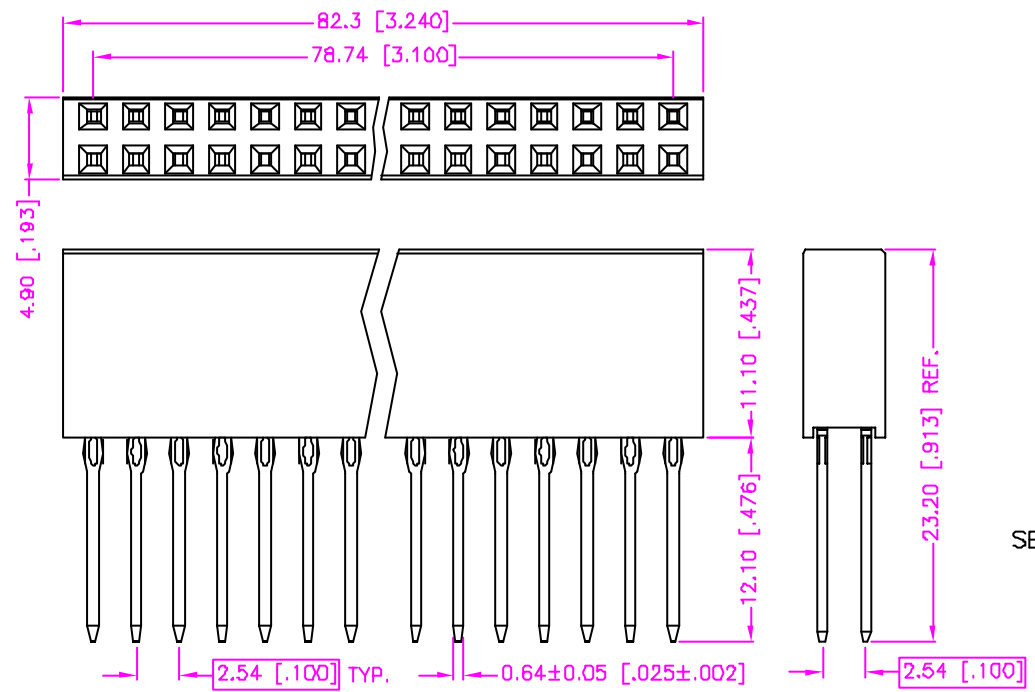

**RECOMMEND P.C.B. LAYOUT
TOP VIEW**

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>Katherlin</i> CHECK <i>SUE</i> APP'D <i>LYON</i>	 ASTRON TECHNOLOGY CORP. NAME POST HEADER RECEPTACLE 2.54mm PITCH, P.C.B. MOUNT PRESS FIT TYPE
UNITS : mm [Inch]	PRODUCT SPEC. —	DRAW NO. C349-1002	
SCALE NONE SIZE A4	SHEET 1 OF 1 REV. B	10018	