

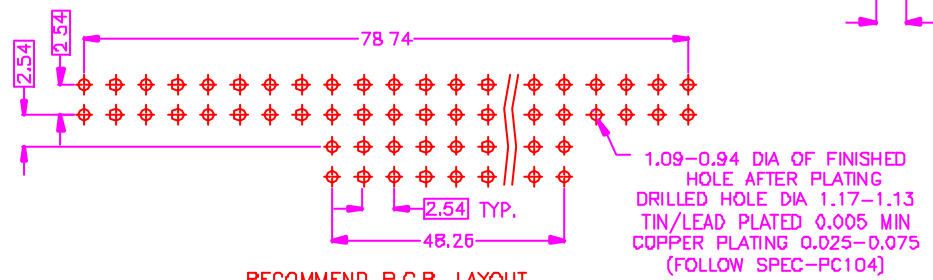
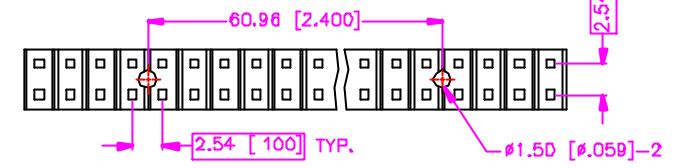
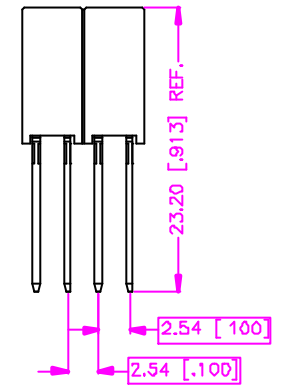
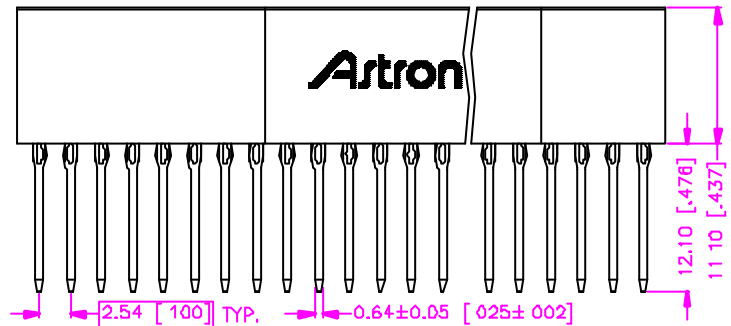
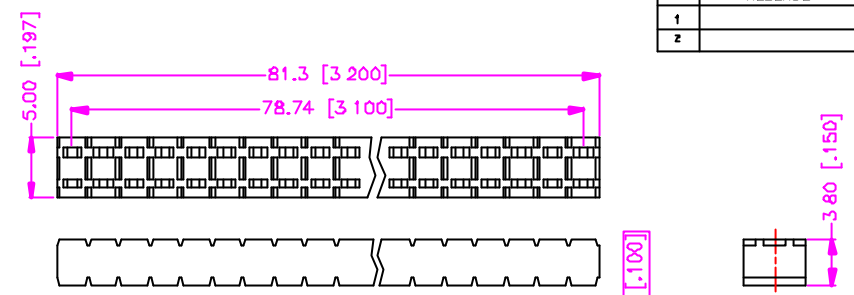


REV.	DESCRIPTION	DATE
—	RELEASE	Jan. 29, 2002
1		
2		

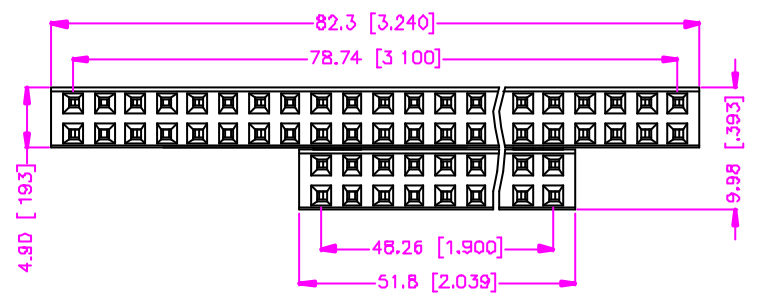

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

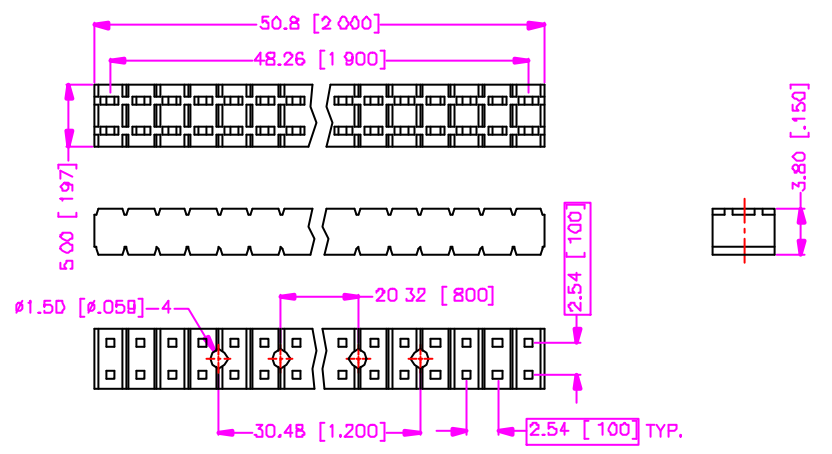

MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY. (t=0.60mm)

ORDER INFORMATION :

25 - 12 01 - 001

SERIES CODE

TYPE 001

SPECIFICATION

1. CURRENT RATING : 2 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

TOLERANCE	DRAWER <i>suS</i>
.0=±.0.30 [.012]	CHECK <i>Katherlin</i>
00=±0.20 [.008]	APP'D <i>ALBT</i>
000=±xxx	PRODUCT SPEC. —
0000=±.	
ANG.=±3°	
UNITS : mm [inch]	
SCALE NONE	SHEET 1 OF 1
SIZE A4	REV. <i>A</i>

Astron	
ASTRON TECHNOLOGY CORP.	
NAME POST HEADER RECEPTACLE 2.54mm PITCH, P.C.B. MOUNT PRESS FIT TYPE	
DRAW NO. C349-1003	
10018	