
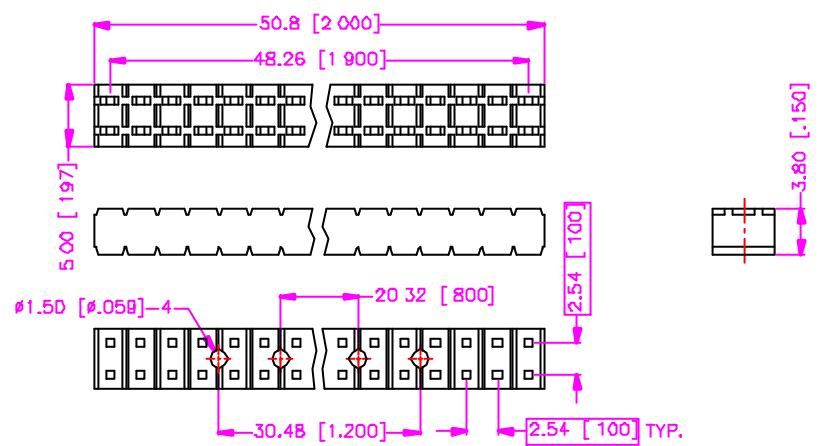
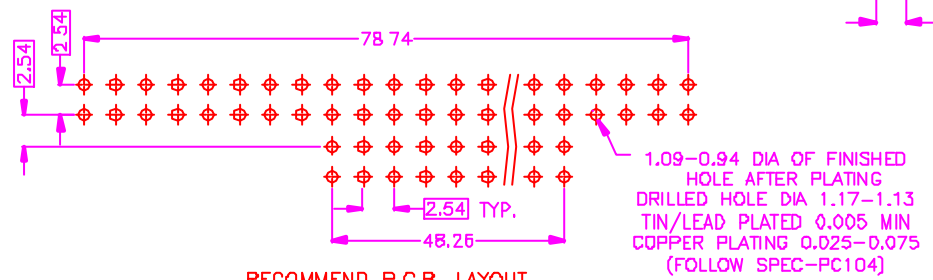
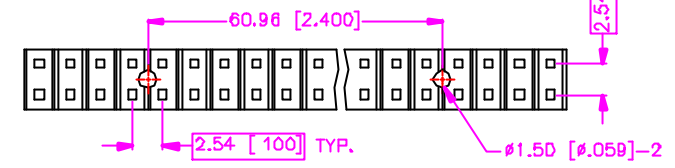
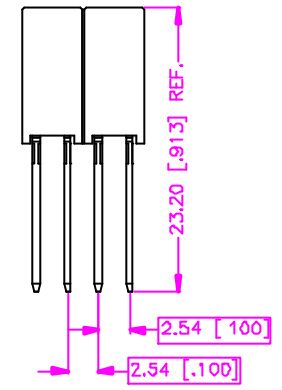
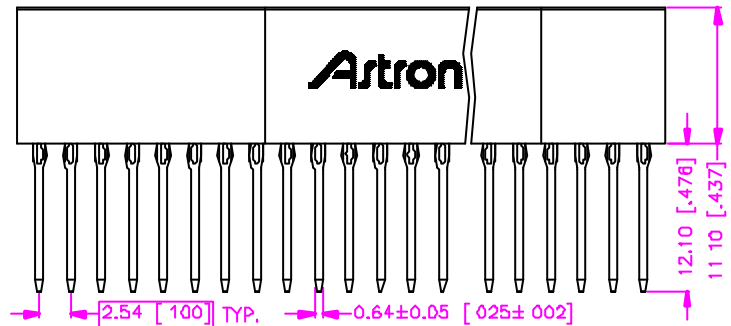
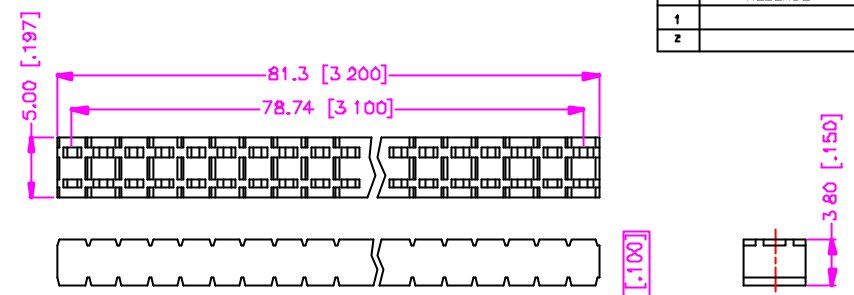


REV.	DESCRIPTION	DATE
—	RELEASE	Jan. 29, 2002
1		
2		

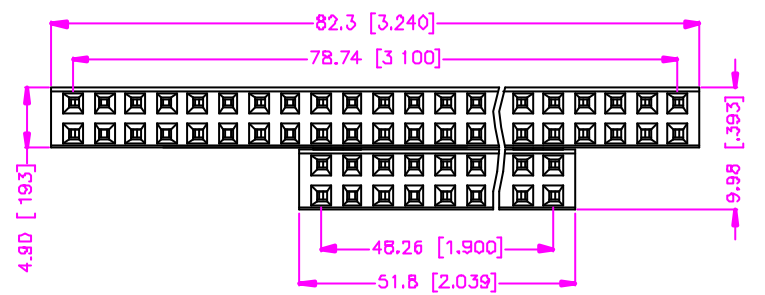

MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY. (t=0.60mm)

SPECIFICATION

1. CURRENT RATING : 2 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

ORDER INFORMATION :

25 - 12 01 - 001

SERIES CODE TYPE 001

TOLERANCE .0±.030 [0.012] 00±.020 [0.008] 000±.xxx 0000±. ANG.=±3°	DRAWER <i>suS</i>	Astron ASTRON TECHNOLOGY CORP. NAME POST HEADER RECEPTACLE 2.54mm PITCH, P.C.B. MOUNT PRESS FIT TYPE DRAW NO. C349-1003
	CHECK <i>Katherlin</i>	
	APP'D <i>ALBT</i>	
	PRODUCT SPEC. —	
UNITS : mm [inch]	SHEET 1 OF 1	REV. <i>A</i>
SCALE NONE	SIZE A4	10018