
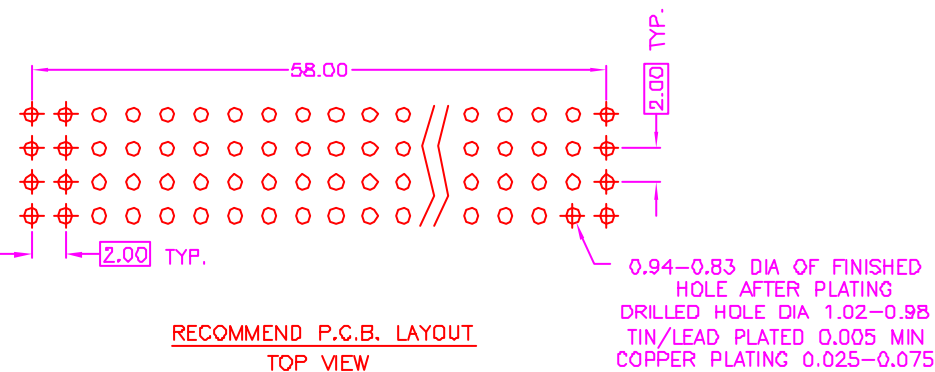
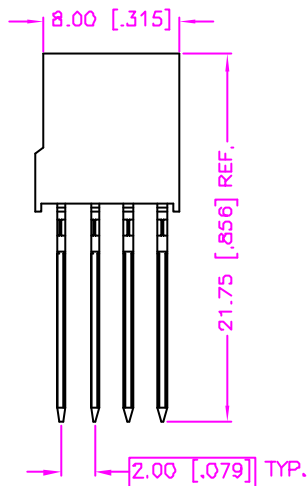
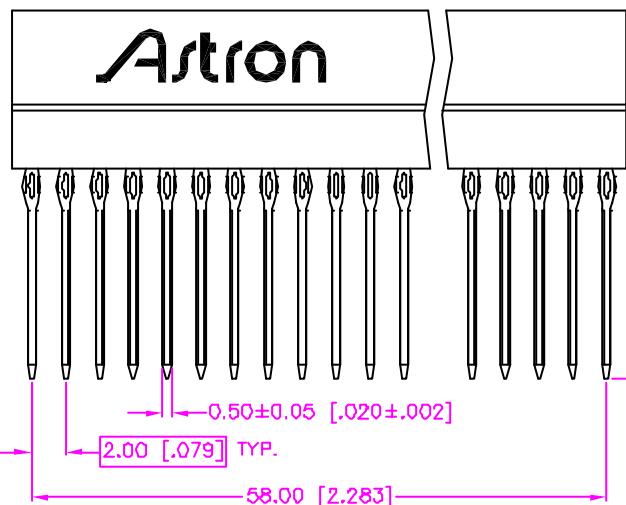


REV.	DESCRIPTION	DATE
—	RELEASE	Aug. 27, 2002
1	DRAW MODIFY	Dec. 18, 2002
2		

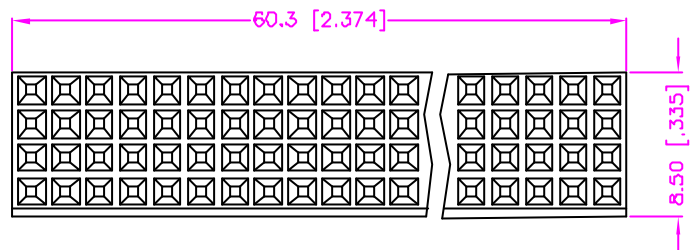

### MATERIALS

- HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY. (t=0.50mm)

### SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.

### ORDER INFORMATION :

25 - 29 01 - 4 30 - 2 G

SERIES CODE      TYPE 01      QUAD ROWS      GOLD PLATING ON TAIL      10μ" GOLD PLATING ON CONTACT AREA      NUMBER OF POSITIONS PER ROW

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3'		DRAWER <i>Katherine</i>		 ASTRON TECHNOLOGY CORP.	
CHECK <i>Lion</i>		APP'D <i>PLB</i>			
UNITS : mm [Inch]		PRODUCT SPEC. —		DRAW NO. C349-2001	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. B	10018	