
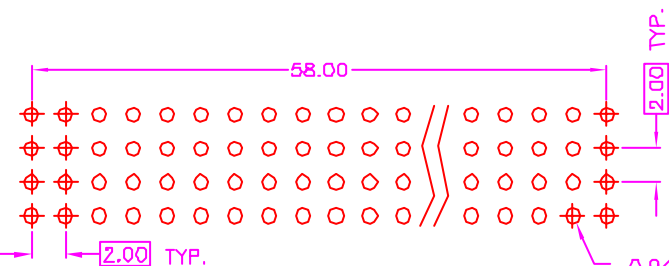
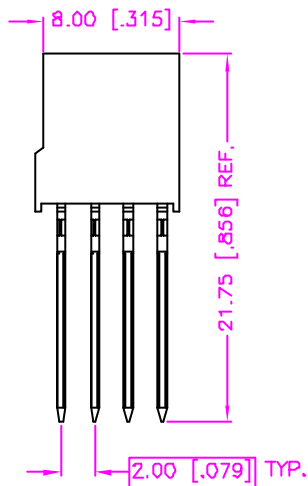
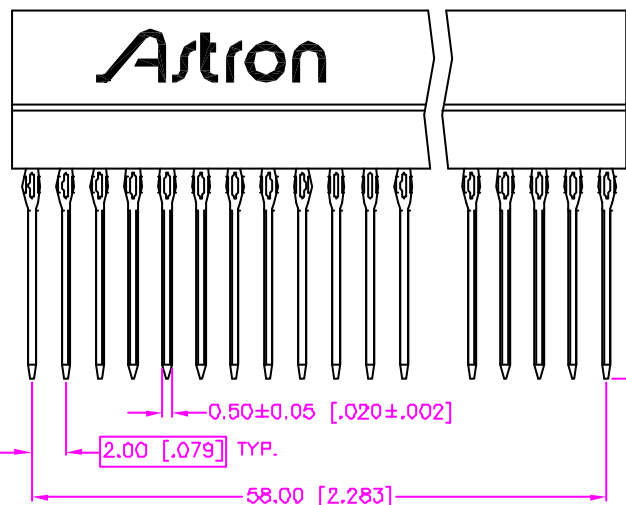


REV.	DESCRIPTION	DATE
—	RELEASE	Aug. 27, 2002
1	DRAW MODIFY	Dec. 18, 2002
2		

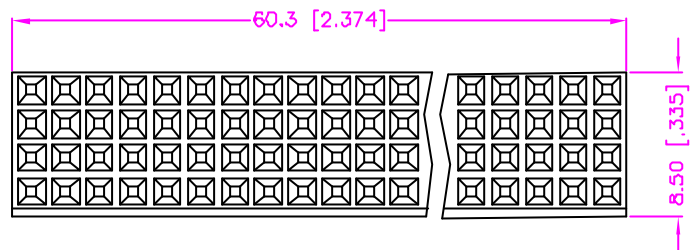

0.94-0.83 DIA OF FINISHED HOLE AFTER PLATING
 DRILLED HOLE DIA 1.02-0.98
 TIN/LEAD PLATED 0.005 MIN
 COPPER PLATING 0.025-0.075

RECOMMEND P.C.B. LAYOUT
 TOP VIEW

MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY. (t=0.50mm)


SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

ORDER INFORMATION :

25 - 29 01 - 4 30 - 2 G

SERIES CODE TYPE 01 QUAD ROWS GOLD PLATING ON TAIL 10µ" GOLD PLATING ON CONTACT AREA NUMBER OF POSITIONS PER ROW

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3'		DRAWER <i>Katherine</i>		 ASTRON TECHNOLOGY CORP. NAME POST HEADER RECEPTACLE 2.00mm PITCH, P.C.B. MOUNT PRESS FIT TYPE	
UNITS : mm [Inch]		CHECK <i>Lion</i>			
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. B	10018	