


REV.	DESCRIPTION	DATE
—	RELEASE	Dec. 2, 2000
1	DRAW MODIFY	Apr. 02, 2002
2	DRAW MODIFY	Nov. 13, 2003

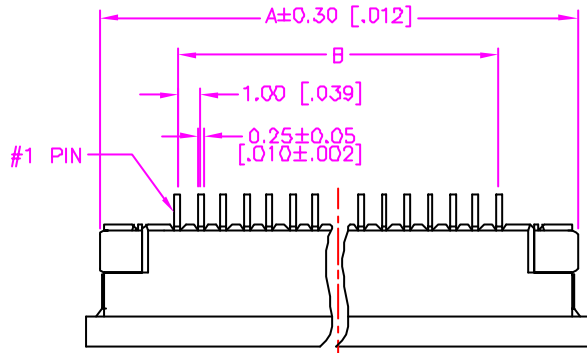

$$A = (\text{TOTAL NO. OF PINS} - 1) \times 1.00 + 6.85$$

$$(\text{TOTAL NO. OF PINS} - 1) \times 0.039 + .270$$

$$B = (\text{TOTAL NO. OF PINS} - 1) \times 1.00$$




$$(\text{TOTAL NO. OF PINS} - 1) \times 0.039$$

$$C = (\text{TOTAL NO. OF PINS} - 1) \times 1.00 + 2.25$$

$$(\text{TOTAL NO. OF PINS} - 1) \times 0.039 + .089$$

$$D = (\text{TOTAL NO. OF PINS} - 1) \times 1.00 + 8.00$$

$$(\text{TOTAL NO. OF PINS} - 1) \times 0.039 + .315$$

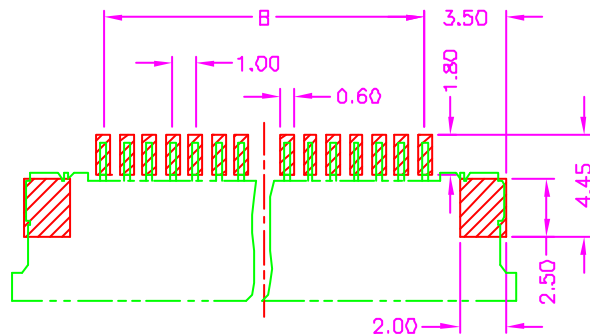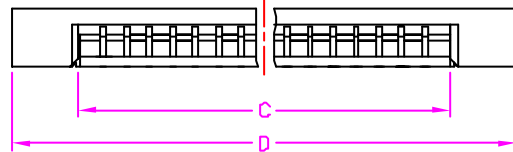

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

- HOUSING : HI.-TEMP. PLASTIC (UL 94V-0).
- SLIDER : P.P.S. (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE. (t=0.25mm)
- MATEL TAB : COPPER ALLOY, TIN PLATING. (t=0.20mm)

SPECIFICATION

- CURRENT RATING : 0.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.
- MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :

55 - 2602 2 - ** W - T - **

SERIES CODE | BOTTOM CONTACT | NUMBER OF POSITIONS
04 ~ 34 PINS

PACKAGE OPTIONS
BLANK : TUBE
TR : TAPE & REEL

TIN PLATING ON TERMINAL
WHITE IN HOUSING COLOR

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.xxx .0000=±. ANG.=±3°	DRAWER <i>MUS</i> CHECK <i>Katherine</i> APP'D <i>ALBT</i>	 Astron ASTRON TECHNOLOGY CORP.		
 UNITS : mm [inch]	PRODUCT SPEC. —		NAME FPC CONNECTOR 1.00mm PITCH, BOTTOM CONTACT SMT, ZIF	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. C	DRAW NO. C355-2603
				10015