
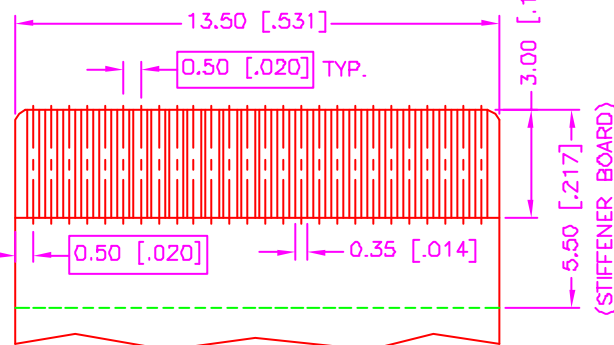
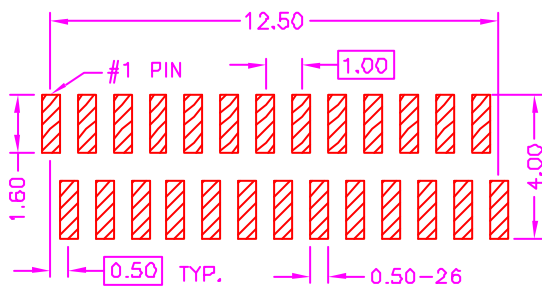

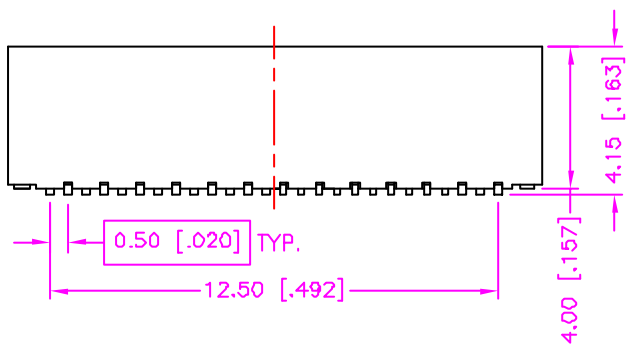


REV.	DESCRIPTION	DATE
—	RELEASE	JUL. 18, 2001
1		
2		

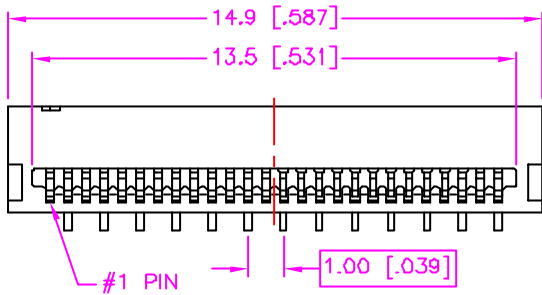

RECOMMEND P.C.B. LAYOUT  
TOP VIEW

APPLICABLE FPC  
RECOMMEND DIMENSION (t=0.30mm)

### MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0).
2. TERMINAL : COPPER ALLOY.

### SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 200V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 500M OHMS MIN. AT 100V DC.
4. CONTACT RESISTANCE : 20m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

### ORDER INFORMATION :

55 - 4501 3 - 26 W - T

SERIES CODE | NON-DIFFERENCE | 26 | W | T

TIN PLATING ON TERMINAL  
WHITE IN HOUSING COLOR  
NUMBER OF POSITIONS

TOLERANCE .0=±.030 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>MS</i> CHECK <i>Katharina</i> APP'D <i>ALB</i>	 ASTRON TECHNOLOGY CORP.		
 UNITS : mm [inch]	PRODUCT SPEC. —		NAME FPC CONNECTOR 0.50mm PITCH, P.C.B. MOUNT SMT, NON-ZIF	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	DRAW NO. C355-4501
				10018