
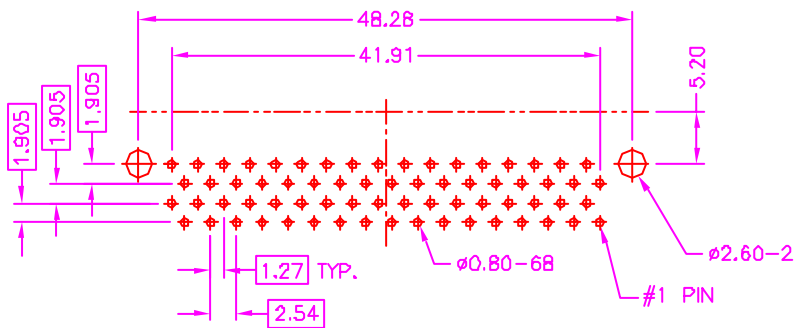
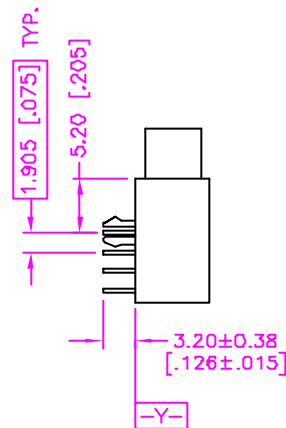
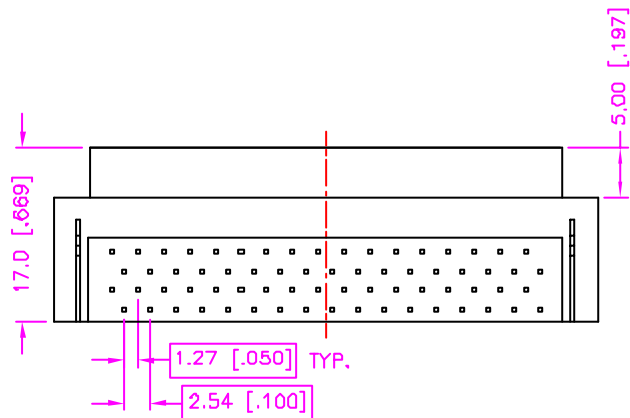


REV.	DESCRIPTION	DATE
—	RELEASE	May 3, 2000
1	MATERIAL MODIFY	Jun. 1, 2001
2		

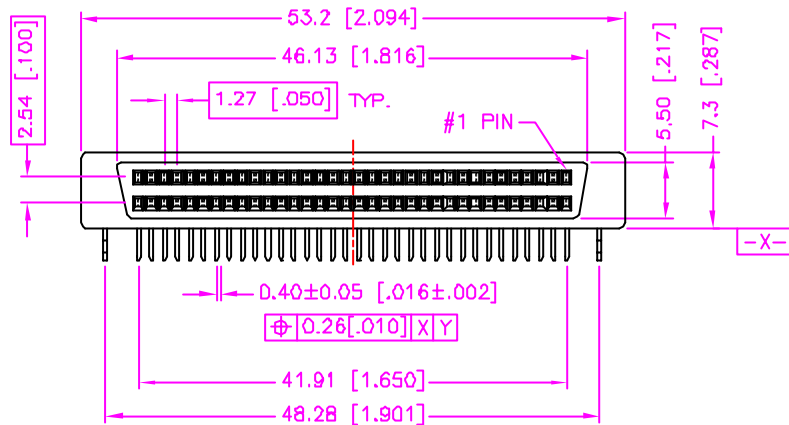

MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY. (t=0.35mm)
3. RETENTION LEG : BRASS, TIN PLATING.

SPECIFICATION



1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -20°C TO +85°C.
6. DURABILITY : 500 CYCLE.

ORDER INFORMATION :

10 - 06 1 * - 68 - * T

SERIES CODE | P.C.B. LAYOUT STYLE | RETENTION LEG OPTIONS | NUMBER OF POSITION | TIN PLATING ON SOLDER TAIL | CONTACT PLATING OPTIONS

1 : STYLE 1 | A : WITHOUT RETENTION LEG | BLANK : WITH RETENTION LEG | 1 : GOLD FLASH | 2 : .000010" GOLD | 3 : .000015" GOLD | 5 : .000030" GOLD

TOLERANCE .0±.30 [.012] .00±.20 [.008] .000±.XXX .0000±. ANG.=±3°	DRAWER <i>Kathleen</i> CHECK <i>Jus</i> APP'D <i>Wesley</i>	 ASTRON TECHNOLOGY CORP. NAME SCSI SERIES PIN TYPE, STYLE 1, FEMALE RIGHT ANGLE, ALL PLASTIC
 UNITS : mm [inch] 303-0011 SCALE NONE SIZE A4 SHEET 1 OF 1 REV. B (A)	DRAW NO. C451-0010	