
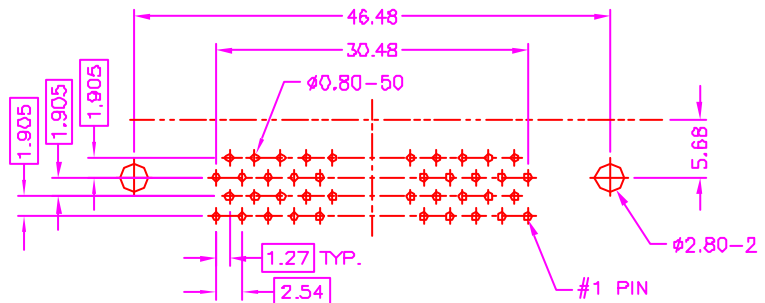
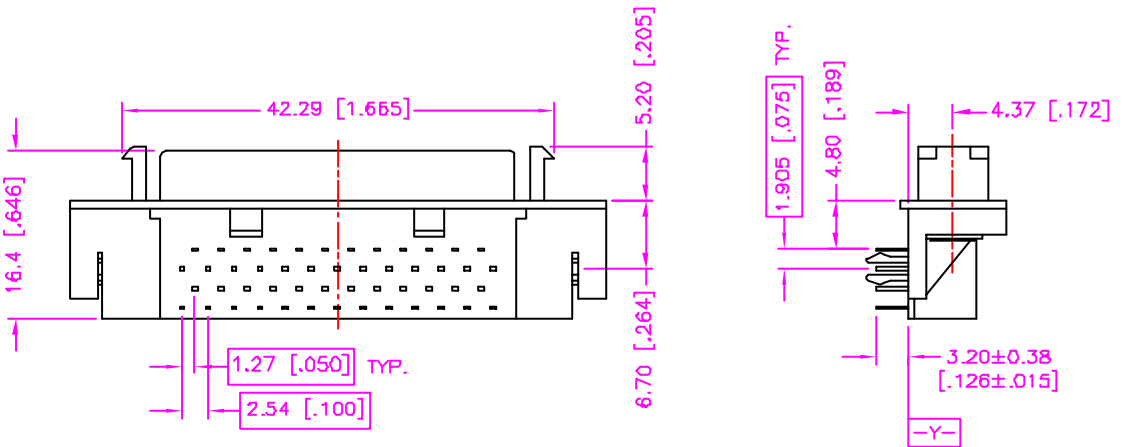


REV.	DESCRIPTION	DATE
—	RELEASE	May 15, 2000
1	MATERIAL MODIFY	Jun. 1, 2001
2		

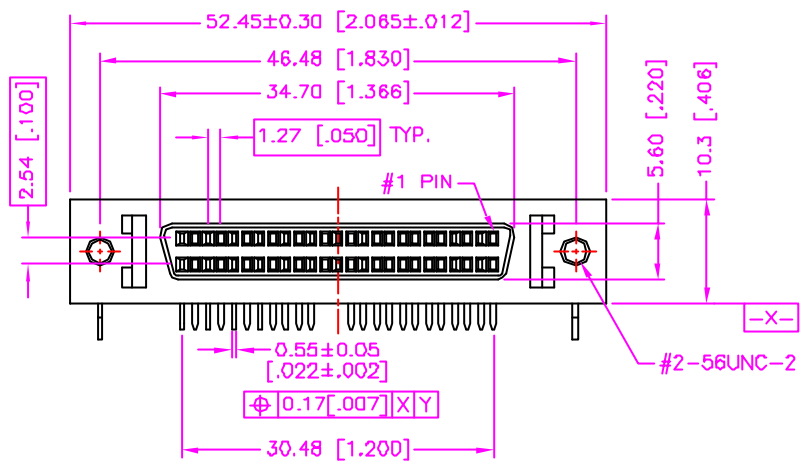

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY, (t=0.30mm)
3. SHELL : ZINC ALLOY, NICKEL PLATING.

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -20°C TO +85°C.
6. DURABILITY : 500 CYCLES.

ORDER INFORMATION :

10 - 07 1 - 50 - * T
 SERIES CODE | | | | | TIN PLATING ON SOLDER TAIL
 P.C.B. LAYOUT STYLE | | | | | CONTACT PLATING OPTIONS
 1 : STYLE 1 | | | | | 1 : GOLD FLASH
 | | | | | 2 : .000010" GOLD
 | | | | | 3 : .000015" GOLD
 | | | | | 5 : .000030" GOLD
 NUMBER OF POSITION

TOLERANCE .0±.30 [.012] .00±.20 [.008] .000±.XXX .0000±. ANG.=±3°	DRAWER <i>Katherton</i> CHECK <i>SUB</i> APP'D <i>WJY&LY</i>	 ASTRON TECHNOLOGY CORP. NAME SCSI SERIES PIN TYPE, FEMALE, RIGHT ANGLE STYLE 1, METAL SHIELD WITH LATCH
 UNITS : mm [inch]	PRODUCT SPEC. — 303-0025	
SCALE NONE	SIZE A4	DRAW NO. C451-0015
SHEET 1 OF 1	REV. B	07002