
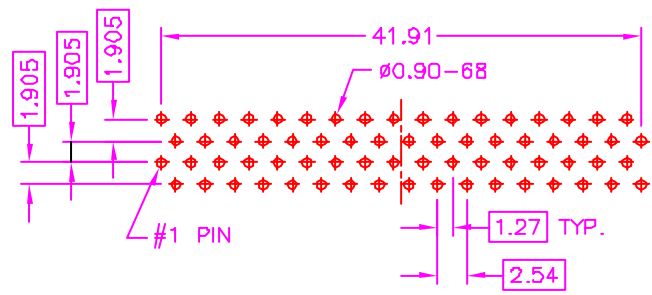

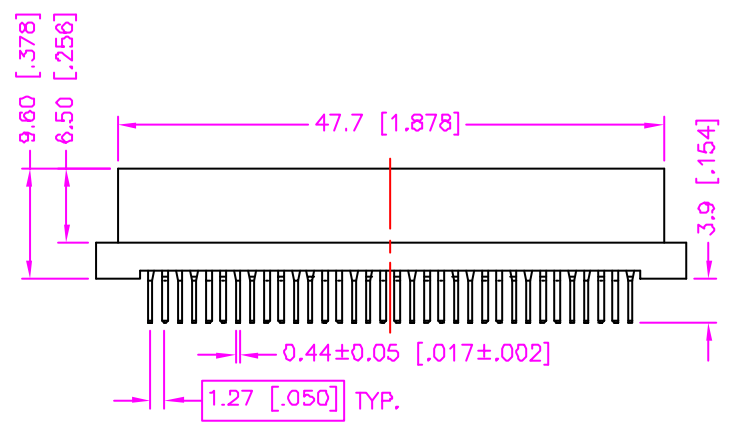


REV.	DESCRIPTION	DATE
—	RELEASE	Aug. 17, 2001
1		
2		

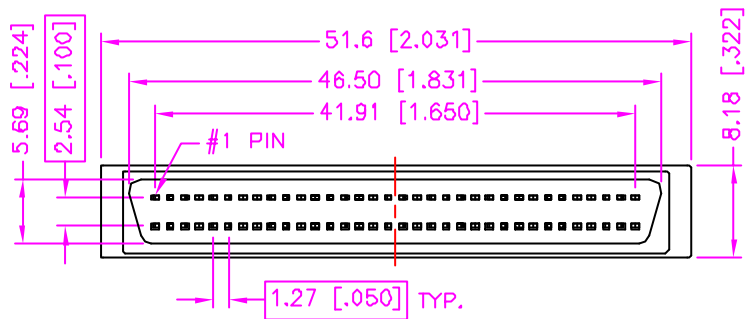

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW


MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY. (t=0.40mm)

SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 300V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 250V DC.
4. OPERATING TEMPERATURE : -40°C TO +85°C.

ORDER INFORMATION :

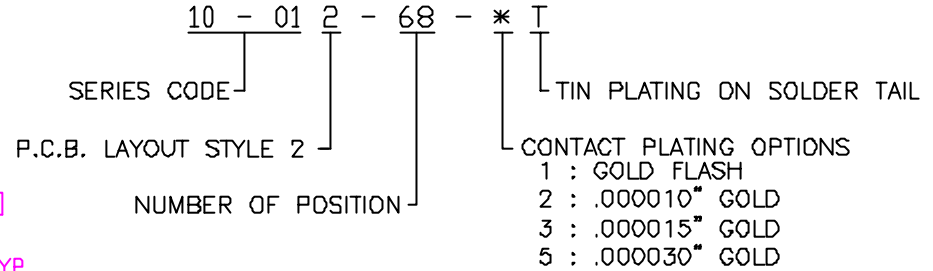

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>Katherlin</i>	 ASTRON TECHNOLOGY CORP.
	CHECK <i>SUS</i>	
 UNITS : mm [inch]	APP'D <i>SPET</i>	PIN TYPE, STYLE 2, MALE VERTICAL, ALL PLASTIC
	PRODUCT SPEC. —	DRAW NO. C451-0020
SCALE NONE	SIZE A4	SHEET 1 OF 1
	REV. A	DRAW NO. 09006