REV.	DESCRIPTION	DATE
—	RELEASE	Nov. 18, 2002
1		
2		

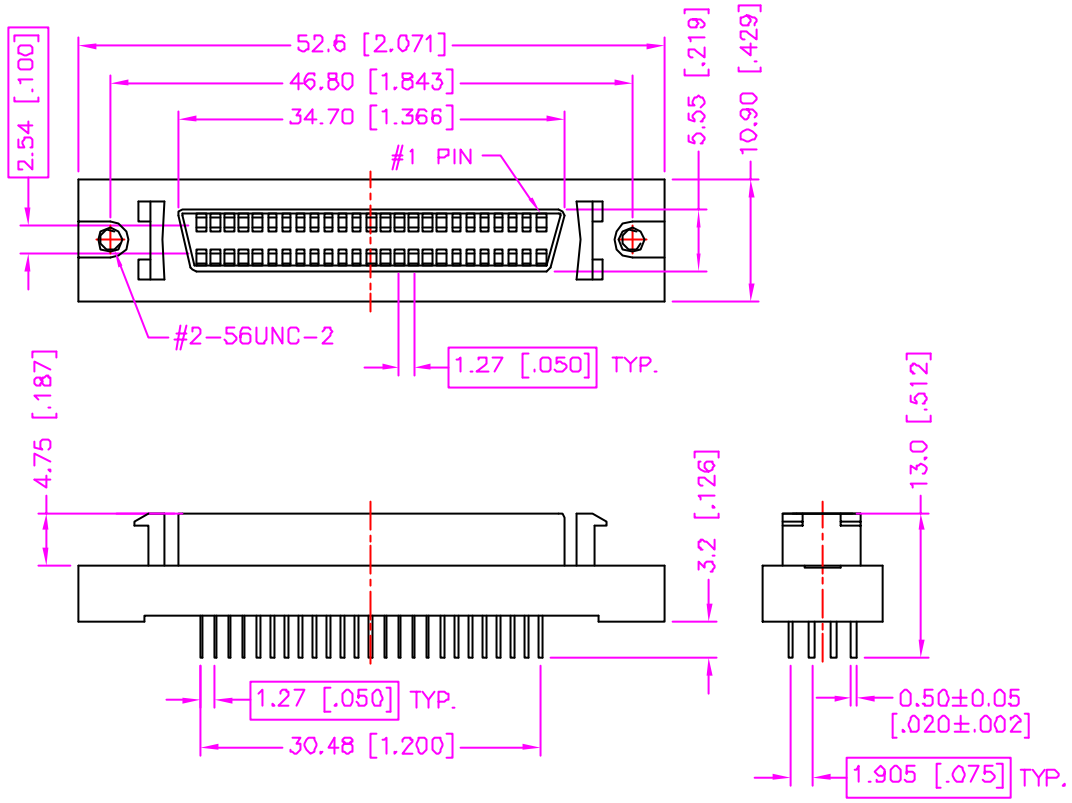

MATERIALS

1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.30mm)
3. SHELL : ZINC ALLOY, NICKEL PLATING.

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
   500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 35m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.
6. DURABILITY : 500 CYCLES.

ORDER INFORMATION :

10 - 04 1 - 50 - * T - 1

- 10 - 04: SERIES CODE
- 1: P.C.B. LAYOUT STYLE
  1 : STYLE 1
- 50: NUMBER OF POSITION
- *: CONTACT PLATING OPTIONS
  1 : GOLD FLASH
  2 : .000010" GOLD
  3 : .000015" GOLD
  5 : .000030" GOLD
- T: TIN PLATING ON SOLDER TAIL
- 1

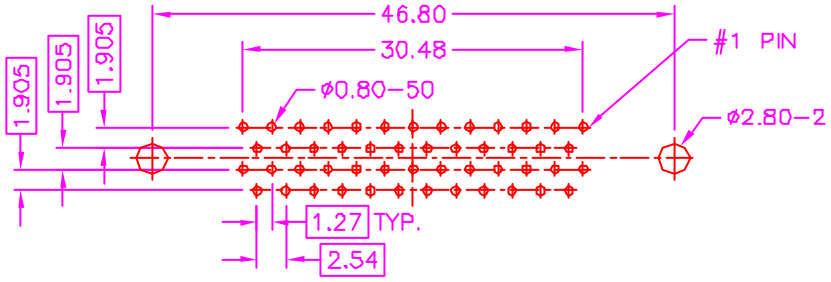

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER PUB CHECK Katherlin APP'D ALEX PRODUCT SPEC. —	Astron ASTRON TECHNOLOGY CORP.	
UNITS : mm [inch]		NAME SCSI SERIES PIN TYPE, STYLE 1, FEMALE, VERTICAL METAL SHELL, WITH LATCH	
		DRAW NO. C451-0026	
SCALE NONE / SIZE A4	SHEET 1 OF 1 / REV. A	18003	