


REV.	DESCRIPTION	DATE
—	RELEASE	Nov. 18, 2002
1		
2		

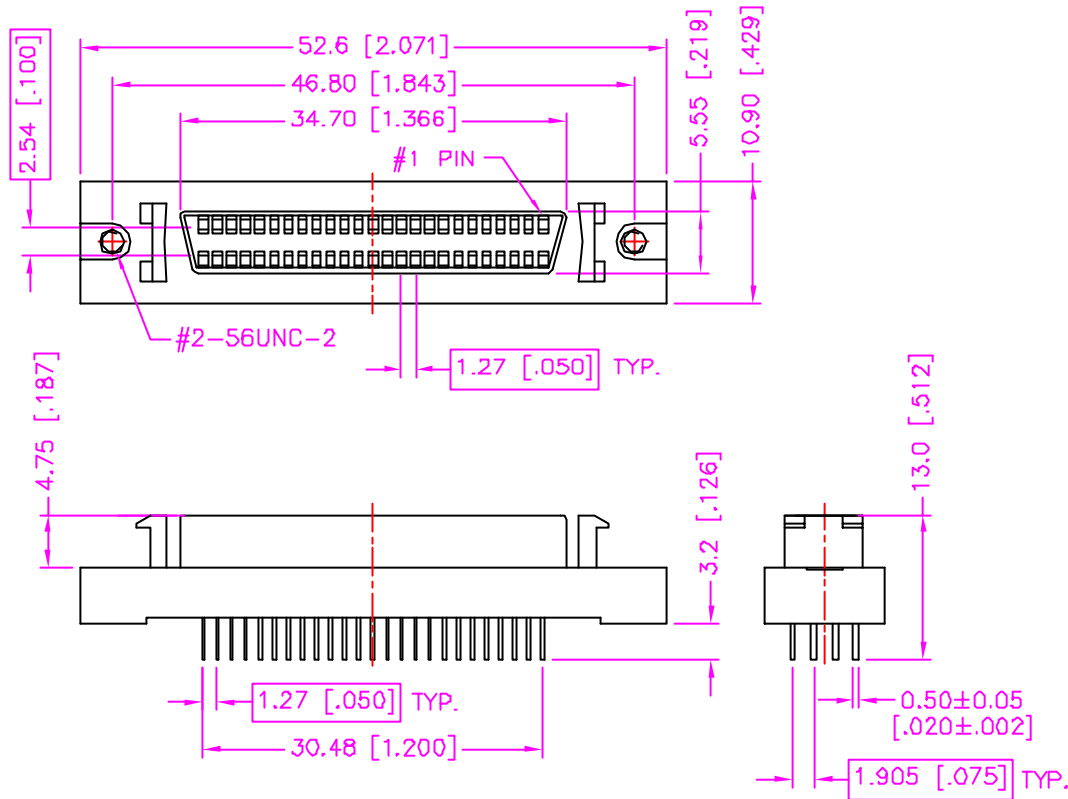

### MATERIALS


1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.30mm)
3. SHELL : ZINC ALLOY, NICKEL PLATING.

### SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 35m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.
6. DURABILITY : 500 CYCLES.

### ORDER INFORMATION :

10 - 04 1 - 50 - \* I - 1  
 SERIES CODE | P.C.B. LAYOUT STYLE | NUMBER OF POSITION | CONTACT PLATING OPTIONS  
 1 : STYLE 1 | TIN PLATING ON SOLDER TAIL  
 1 : GOLD FLASH  
 2 : .000010" GOLD  
 3 : .000015" GOLD  
 5 : .000030" GOLD

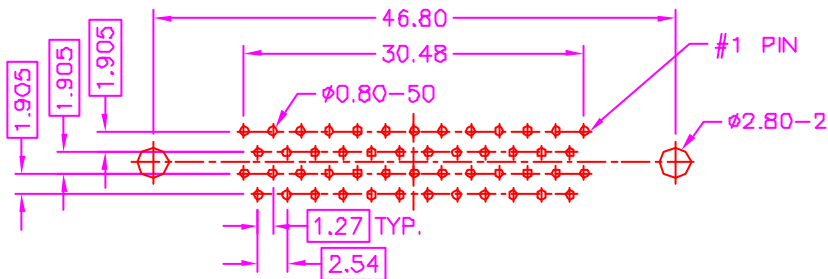

RECOMMEND P.C.B. LAYOUT  
TOP VIEW

TOLERANCE .0±.30 [.012] .00±.20 [.008] .000±.XXX .0000±. ANG.=±3°		DRAWER <i>FUS</i>	 ASTRON TECHNOLOGY CORP.
 UNITS : mm [inch]		CHECK <i>Katherlin</i>	
SCALE NONE		APP'D <i>ALB</i>	PIN TYPE, STYLE 1, FEMALE, VERTICAL METAL SHELL, WITH LATCH
SIZE A4	SHEET 1 OF 1	PRODUCT SPEC. —	DRAW NO. C451-0026
REV. A	DRAW NO. 18003		