
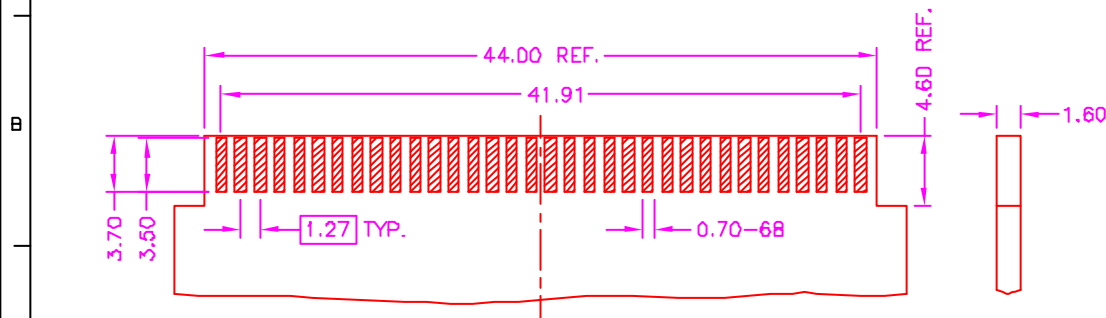
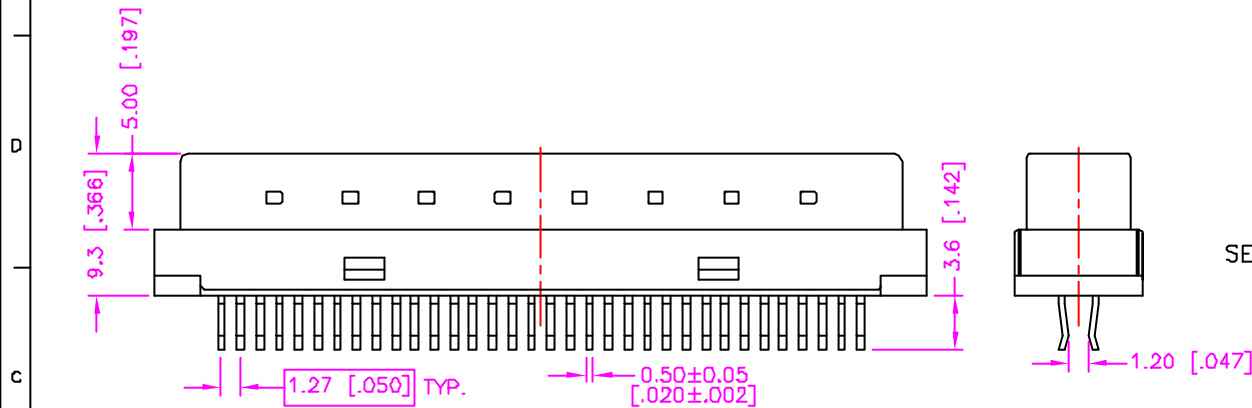


REV.	DESCRIPTION	DATE
—	RELEASE	Dec. 06, 2002
1		
2		

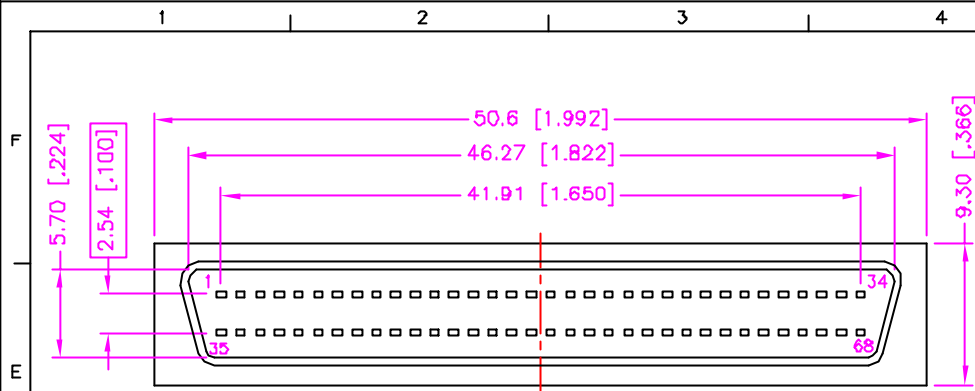

RECOMMEND P.C.B. LAYOUT  
BOTH SIDE

## MATERIALS

1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY. (t=0.40mm)
3. SHELL : STEEL, NICKEL PLATING.

## SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. OPERATING TEMPERATURE : -40°C TO +85°C.

## ORDER INFORMATION :

10 - 19 02 - 68 - \* I

SERIES CODE | TYPE 02 | NUMBER OF POSITION | TIN PLATING ON SOLDER TAIL | CONTACT PLATING OPTIONS

CONTACT PLATING OPTIONS:

- 1 : GOLD FLASH
- 2 : .000010" GOLD
- 3 : .000015" GOLD
- 5 : .000030" GOLD

TOLERANCE		DRAWER		<b>Astron</b>
.0=±.30 [.012]		Katherine		
.00=±.20 [.008]		CHECK		ASTRON TECHNOLOGY CORP.
.000=±.XXX		YUS		NAME
.0000=±.		APP'D		SCSI SERIES
ANG.=±3°		ALLX		1.27mm PITCH, STRADDLE MOUNT
		PRODUCT SPEC.		METAL SHIELD WITHOUT LATCH, MALE (CLIP MOLDED TYPE)
UNITS : mm [inch]				DRAW NO.
				C452-0004
SCALE	SIZE	SHEET	REV.	18003
NDNE	A4	1 OF 1	A	