REV.	DESCRIPTION	DATE
—	RELEASE	May 15, 2001
1	DRAW MODIFY	Dec. 18, 2002
2	DRAW MODIFY	Dec. 19, 2002
3		

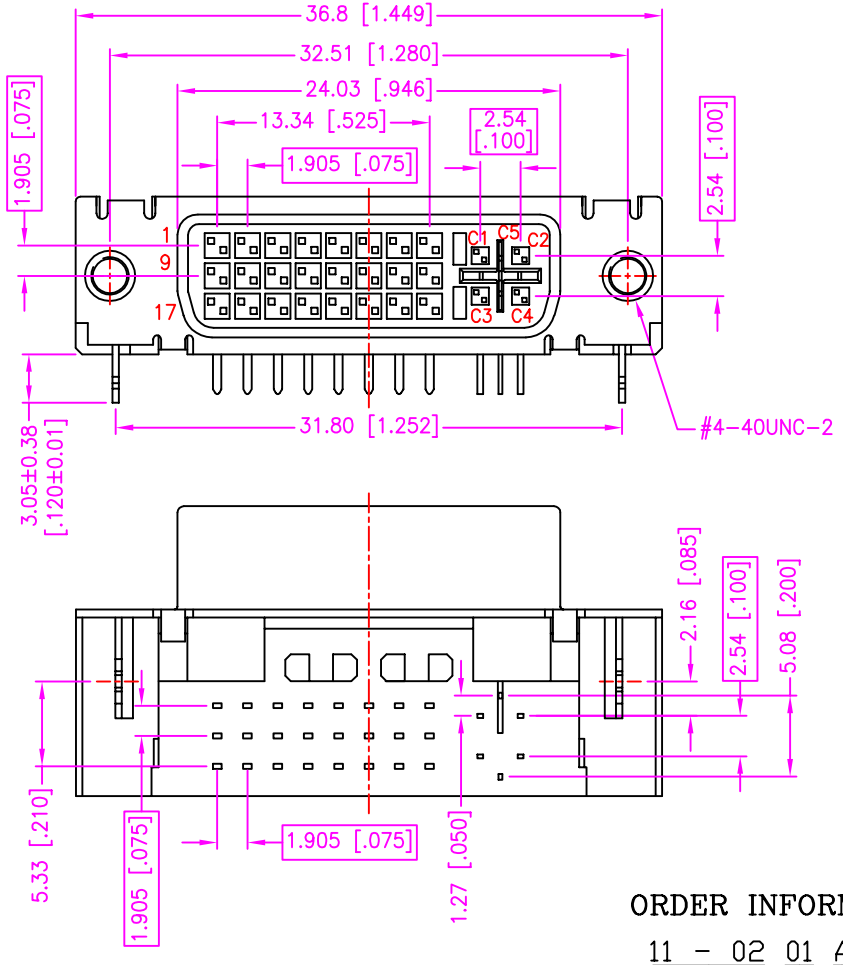

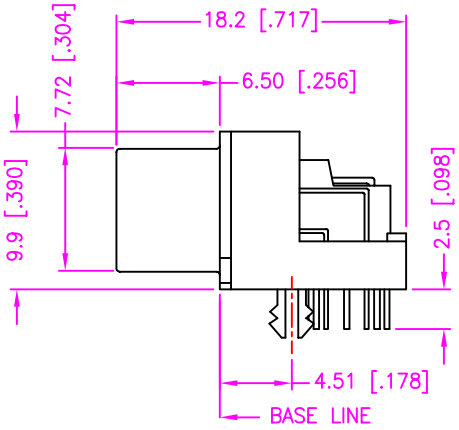

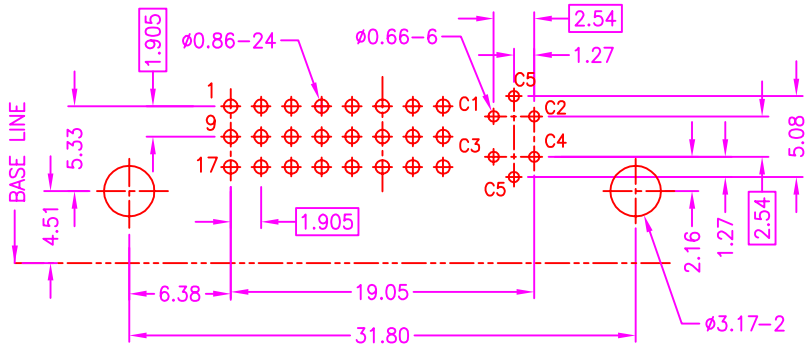

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), WHITE.
2. TERMINAL : COPPER ALLOY.
3. SHELL : STEEL, NICKEL PLATING.
4. BOARDLOCK : COPPER ALLOY, TIN PLATING.

SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 20m OHMS MAX.
5. OPERATING TEMPERATURE : 0°C TO +85°C.
6. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :

11 - 02 01 A H - 29 - * T

- 11 - 02 : SERIES CODE
- 01 : TYPE 01
- A : P.C.B. LAYOUT STYLE 2
- H : HI.-TEMP. PLASTIC
- 29 : NUMBER OF POSITION
- * : CONTACT PLATING OPTIONS
  - 1 : GOLD FLASH
  - 2 : .000010" GOLD
  - 3 : .000015" GOLD
  - 5 : .000030" GOLD
- T : TIN PLATING ON SOLDER TAIL

TOLERANCE .0=±.38 [.015] .00=±.25 [.010] .000=±.XXX .0000=±. ANG.=±3°	DRAWER: SUE CHECK: Katherlin APP'D: ALEX PRODUCT SPEC.: —	Astron ASTRON TECHNOLOGY CORP.	
UNITS : mm [inch]		NAME: DVI SERIES R/A, RECEPTACLE COMBINED ANALOG AND DIGITAL (24+4+1 POS.)	
		DRAW NO.: C461-0006	
SCALE: NONE SIZE: A4	SHEET: 1 OF 1 REV.: C	20002	