
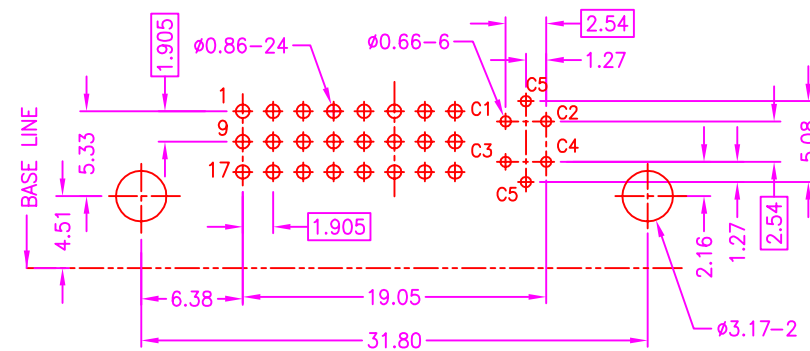
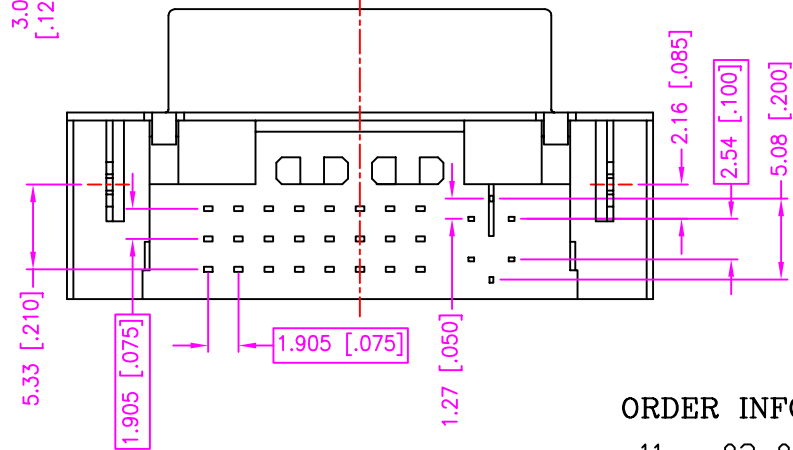
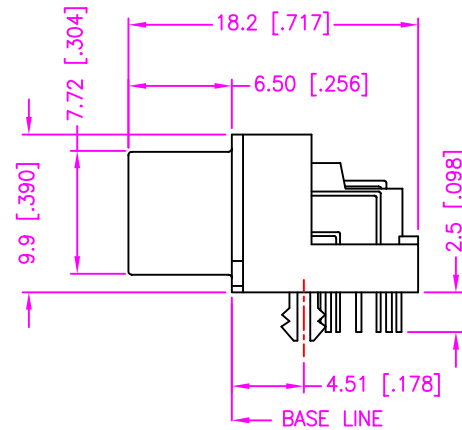


REV.	DESCRIPTION	DATE
—	RELEASE	May 15, 2001
1	DRAW MODIFY	Dec. 18, 2002
2	DRAW MODIFY	Dec. 19, 2002
3		

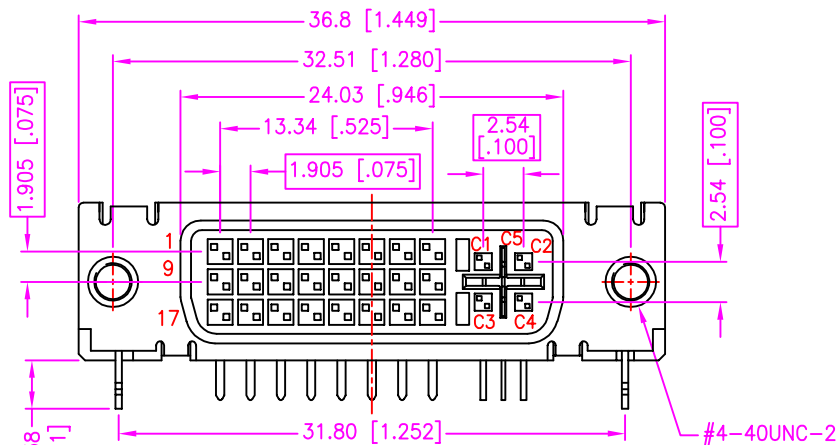

RECOMMEND P.C.B. LAYOUT  
TOP VIEW

**MATERIALS**

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), WHITE.
2. TERMINAL : COPPER ALLOY.
3. SHELL : STEEL, NICKEL PLATING.
4. BOARDLOCK : COPPER ALLOY, TIN PLATING.

**SPECIFICATION**

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 20m OHMS MAX.
5. OPERATING TEMPERATURE : 0°C TO +85°C.
6. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

**ORDER INFORMATION :**

11 - 02 01 A H - 29 - \* T  
 SERIES CODE  
 TYPE 01  
 P.C.B. LAYOUT STYLE 2  
 HI.-TEMP. PLASTIC  
 NUMBER OF POSITION  
 CONTACT PLATING OPTIONS  
 1 : GOLD FLASH  
 2 : .000010" GOLD  
 3 : .000015" GOLD  
 5 : .000030" GOLD  
 TIN PLATING ON SOLDER TAIL

TOLERANCE .0=±.38 [.015] .00=±.25 [.010] .000=±.XXX .0000=±. ANG.=±3'		DRAWER <i>MUS</i>	<b>Astron</b> ASTRON TECHNOLOGY CORP.
UNITS : mm [inch]		CHECK <i>Katherlin</i>	
SCALE NONE	SIZE A4	APP'D <i>ALBX</i>	NAME DVI SERIES R/A, RECEPTACLE COMBINED ANALOG AND DIGITAL (24+4+1 POS.)
SHEET 1 OF 1	REV. C	PRODUCT SPEC. —	DRAW NO. C461-0006
		SHEET 1 OF 1	20002