REV.	DESCRIPTION	DATE
—	RELEASE	Mar. 14, 2002
1	DRAW MODIFY	Mar. 27, 2002
2	DRAW MODIFY	Jun. 06, 2002

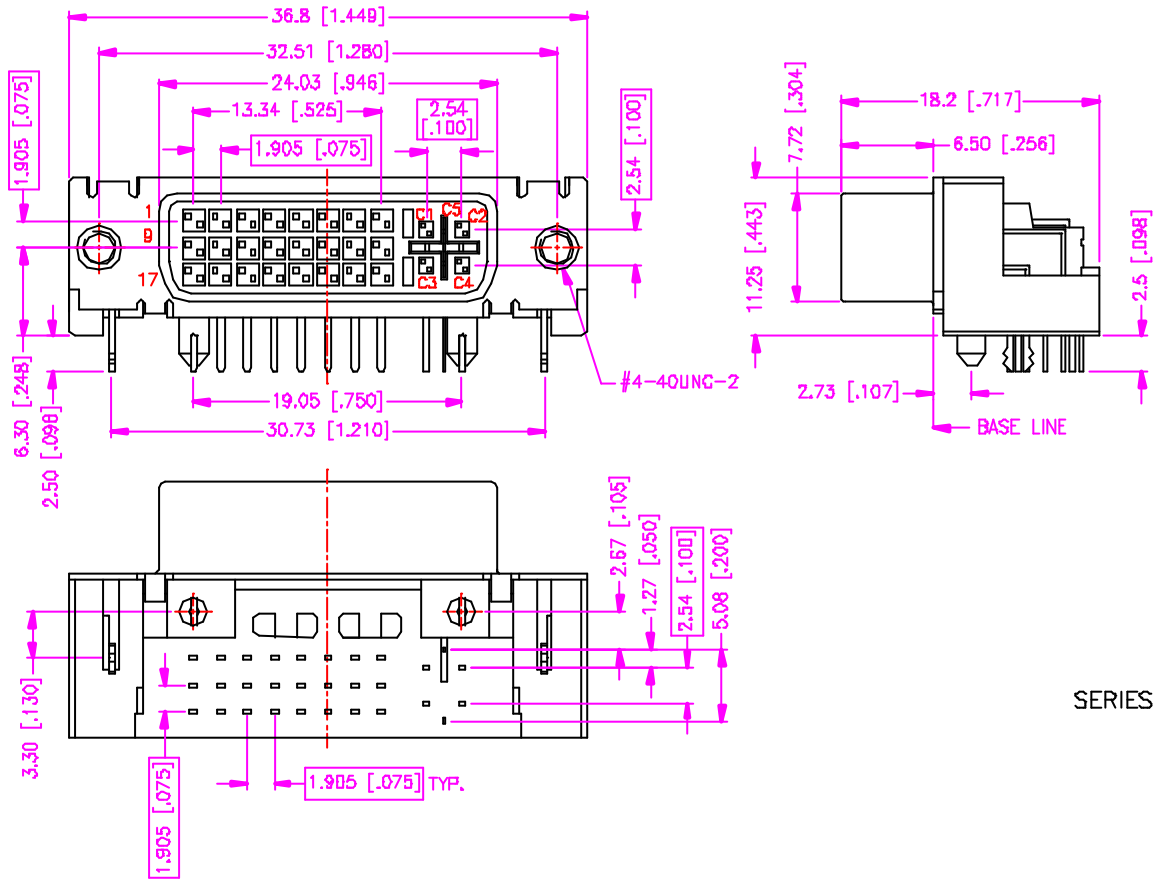

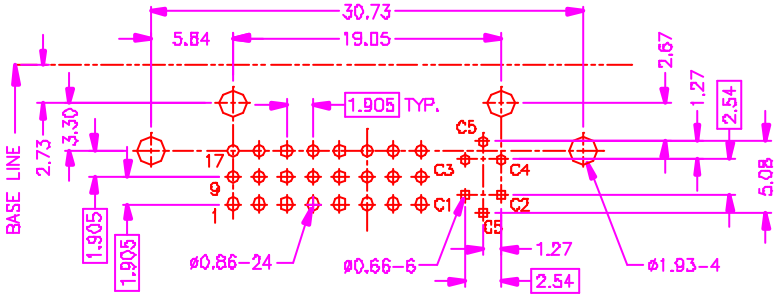

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0).
2. TERMINAL : COPPER ALLOY.
3. SHELL : STEEL, NICKEL PLATING.
4. BOARDLOCK : COPPER ALLOY, TIN PLATING.

SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 20m OHMS MAX.
5. OPERATING TEMPERATURE : 0°C TO +85°C.
6. MAX. PROCESSING TEMPERATURE : 230°C FOR 30 ~ 60 SECONDS. (HI.-TEMP. PLASTIC)

ORDER INFORMATION :

11 - 02 01 B * - 29 * - * T

- SERIES CODE
- TYPE 01
- HIGHRISE TYPE
- PLASTIC OPTIONS
  - BLANK : P.B.T.
  - H : HI.-TEMP. PLASTIC
- NUMBER OF POSITION
- HOUSING COLOR OPTIONS
  - BLANK : WHITE
  - B : BLACK
- CONTACT PLATING OPTIONS
  - 1 : GOLD FLASH
  - 2 : .000010" GOLD
  - 3 : .000015" GOLD
  - 5 : .000030" GOLD
- TIN PLATING ON SOLDER TAIL

TOLERANCE	DRAWER	Astron
.0=±.38 [.015] .00=±.25 [.010] .000=±.XXX .0000=±. ANG.=±3°	SUE	ASTRON TECHNOLOGY CORP.
	CHECK Katherlin	NAME DVI SERIES R/A, RECEPTACLE COMBINED ANALOG AND DIGITAL (24+4+1 POS.)
	APP'D WISELY	
UNITS : mm [inch]	PRODUCT SPEC. —	DRAW NO. C461-0009
SCALE NONE / SIZE A4	SHEET 1 OF 1 / REV. C	20002