
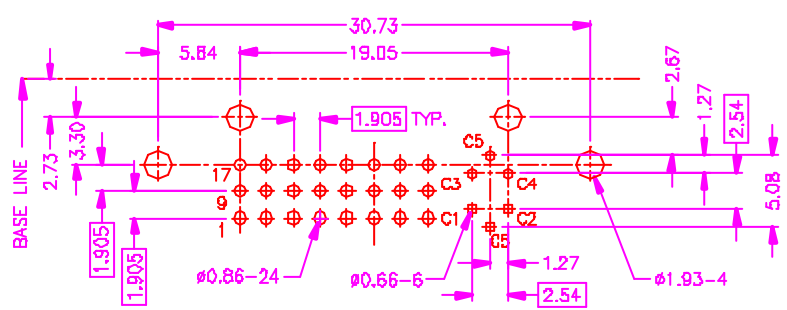
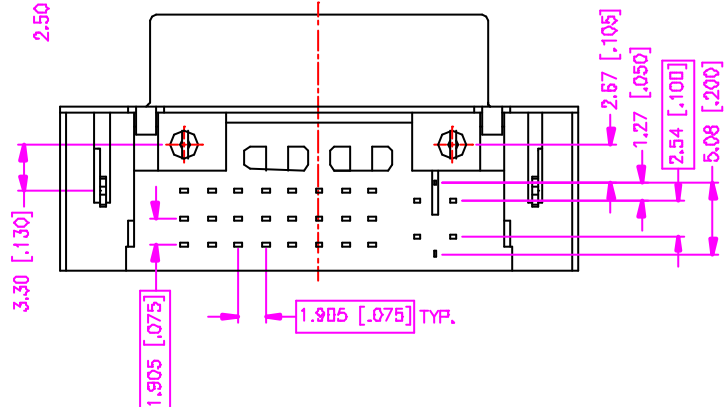
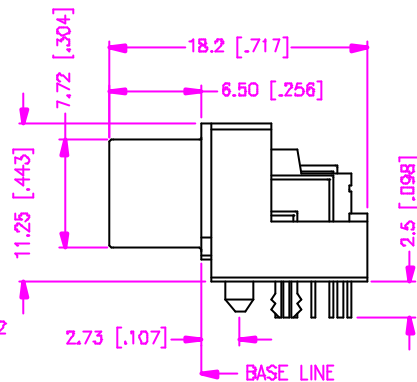


REV.	DESCRIPTION	DATE
—	RELEASE	Mar. 14, 2002
1	DRAW MODIFY	Mar. 27, 2002
2	DRAW MODIFY	Jun. 06, 2002

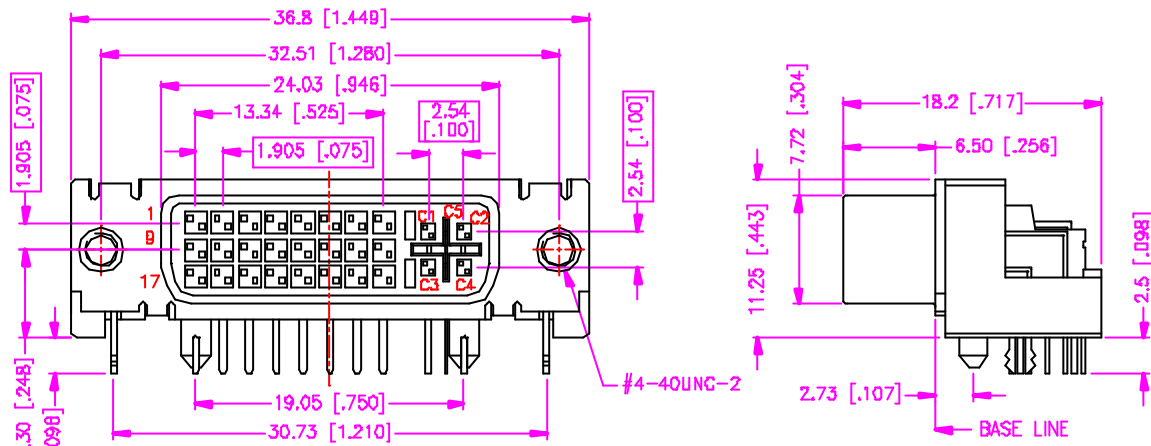


MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0).
2. TERMINAL : COPPER ALLOY.
3. SHELL : STEEL, NICKEL PLATING.
4. BOARDLOCK : COPPER ALLOY, TIN PLATING.

SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 20m OHMS MAX.
5. OPERATING TEMPERATURE : 0°C TO +85°C.
6. MAX. PROCESSING TEMPERATURE : 230°C FOR 30 ~ 60 SECONDS. (HI.-TEMP. PLASTIC)

ORDER INFORMATION :

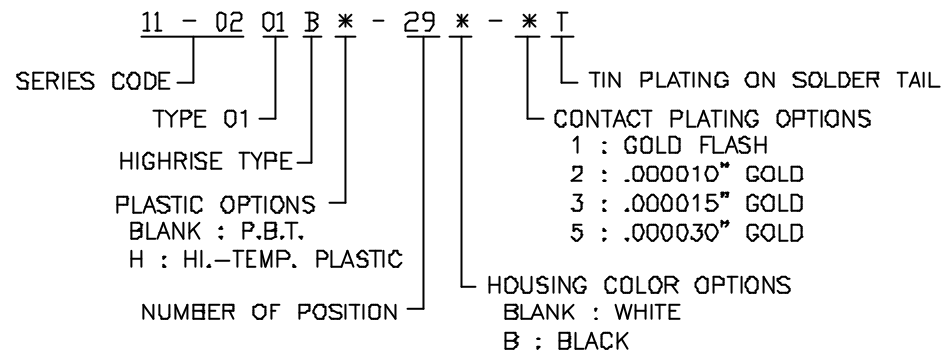

TOLERANCE
.0=±.38 [.015]
.00=±.25 [.010]
.000=±.XXX
.0000=±.
ANG.=±3°

DRAWER	PUB
CHECK	Katherine
APP'D	WJFGLJ
PRODUCT SPEC.	—

UNITS : mm [inch]
SCALE NONE
SIZE A4

SHEET 1 OF 1	REV. C
20002	

Astron	
ASTRON TECHNOLOGY CORP.	
NAME	DVI SERIES R/A, RECEPTACLE COMBINED ANALOG AND DIGITAL (24+4+1 POS.)
DRAW NO.	C461-0009
DATE	20002