
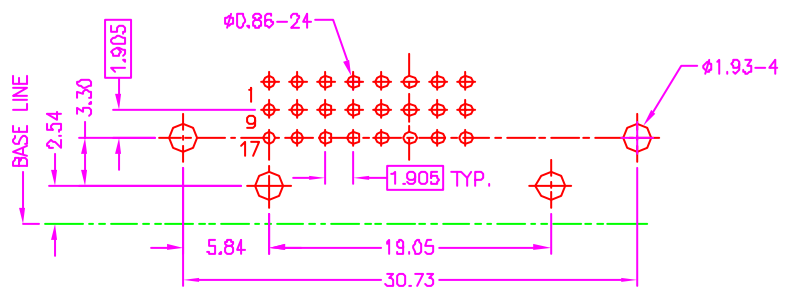
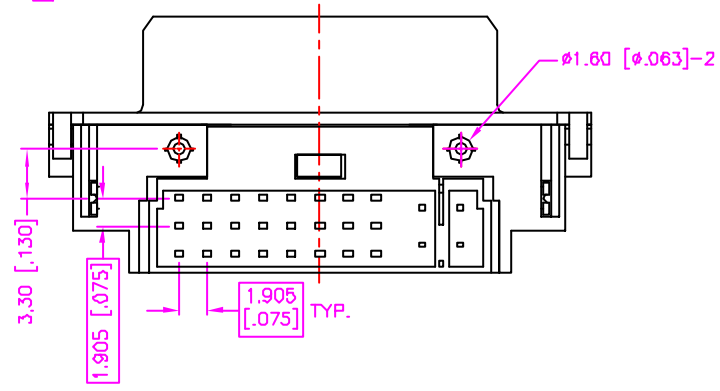
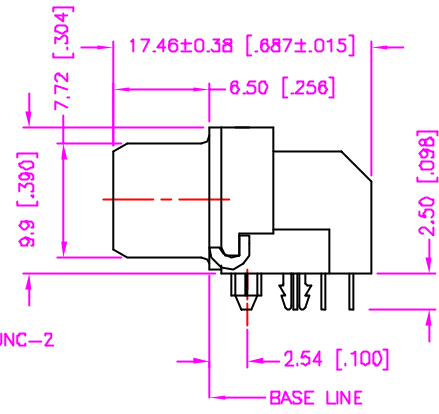


REV.	DESCRIPTION	DATE
—	RELEASE	May. 16, 2003
1		
2		

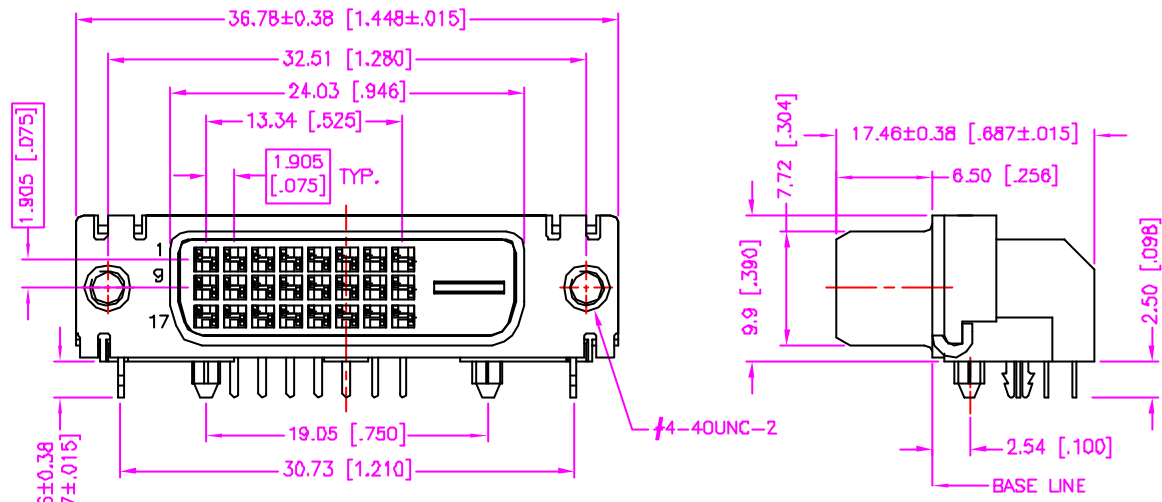

RECOMMEND P.C.B. LAYOUT
TOP VIEW


MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), WHITE.
2. TERMINAL : COPPER ALLOY.
3. SHELL : STEEL, NICKEL PLATING.
4. BOARDLOCK : COPPER ALLOY, TIN PLATING.

SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 20m OHMS MAX.
5. OPERATING TEMPERATURE : 0°C TO +85°C.
6. MAX. PROCESSING TEMPERATURE : 230°C FOR 30 ~ 60 SECONDS. (HI.-TEMP. PLASTIC)

ORDER INFORMATION :

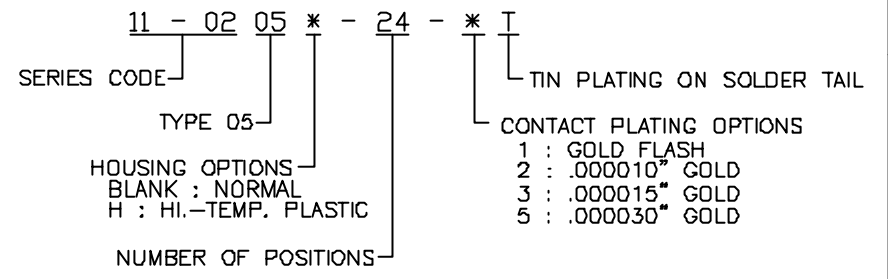

TOLERANCE .0=±.38 [.015] .00=±.25 [.010] .000=±.xxx .0000=±. ANG.=±3°		DRAWER <i>MS</i>		 ASTRON TECHNOLOGY CORP.
UNITS : mm [inch]		CHECK <i>LFON</i>		
SCALE NONE		APP'D <i>Katherine</i>		NAME DVI SERIES R/A, RECEPTACLE DIGITAL ONLY (24 POS.)
SIZE A4		PRODUCT SPEC. —		DRAW NO. C461-0017
SHEET 1 OF 1		REV. A		12008