


| REV. | DESCRIPTION | DATE          |
|------|-------------|---------------|
| —    | RELEASE     | May. 16, 2003 |
| 1    |             |               |
| 2    |             |               |

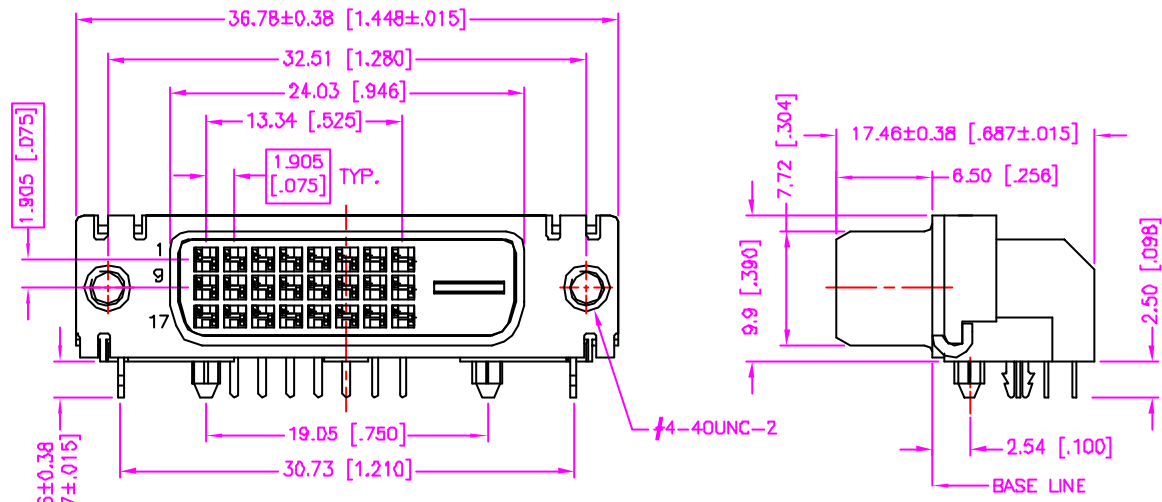




**MATERIALS**

1. HOUSING : THERMOPLASTIC (UL 94V-0), WHITE.
2. TERMINAL : COPPER ALLOY.
3. SHELL : STEEL, NICKEL PLATING.
4. BOARDLOCK : COPPER ALLOY, TIN PLATING.

**SPECIFICATION**

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 20m OHMS MAX.
5. OPERATING TEMPERATURE : 0°C TO +85°C.
6. MAX. PROCESSING TEMPERATURE : 230°C FOR 30 ~ 60 SECONDS. (HI.-TEMP. PLASTIC)

**ORDER INFORMATION :**

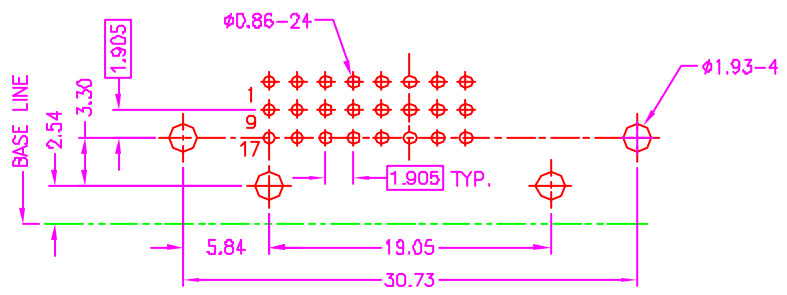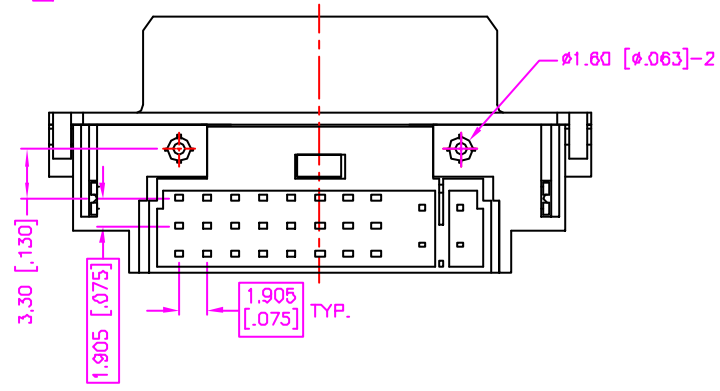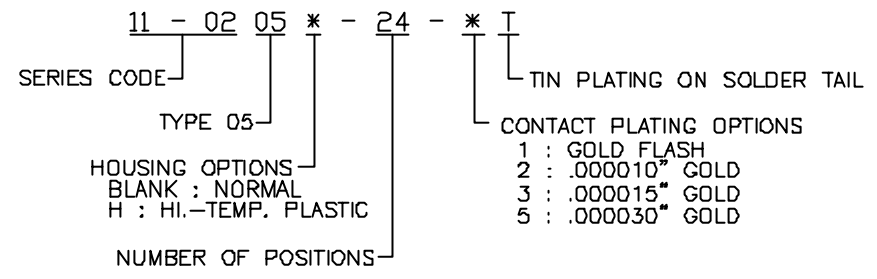

RECOMMEND P.C.B. LAYOUT  
TOP VIEW

|  |  |                           |  |  |
|--|--|---------------------------|--|--|
| TOLERANCE<br>.0=±.38 [.015]<br>.00=±.25 [.010]<br>.000=±.xxx<br>.0000=±.<br>ANG.=±3° |  | DRAWER<br><i>NUS</i>      |  | <br>ASTRON TECHNOLOGY CORP.  |
| UNITS : mm [inch]  |  | CHECK<br><i>LFON</i>      |  |  |
| SCALE NONE   |  | APP'D<br><i>Katherlin</i> |  | NAME<br>DVI SERIES<br>R/A, RECEPTACLE<br>DIGITAL ONLY<br>(24 POS.) |
| SIZE A4  |  | PRODUCT SPEC.<br>—        |  | DRAW NO.<br>C461-0017  |
| SHEET 1 OF 1   |  | REV. A                    |  | 12008  |