

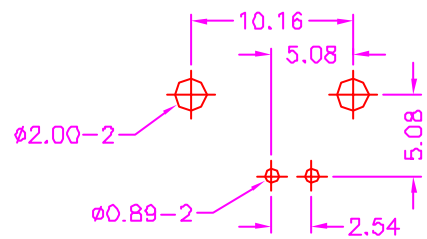
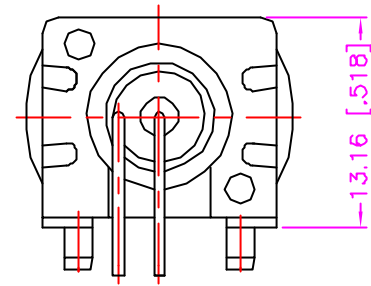
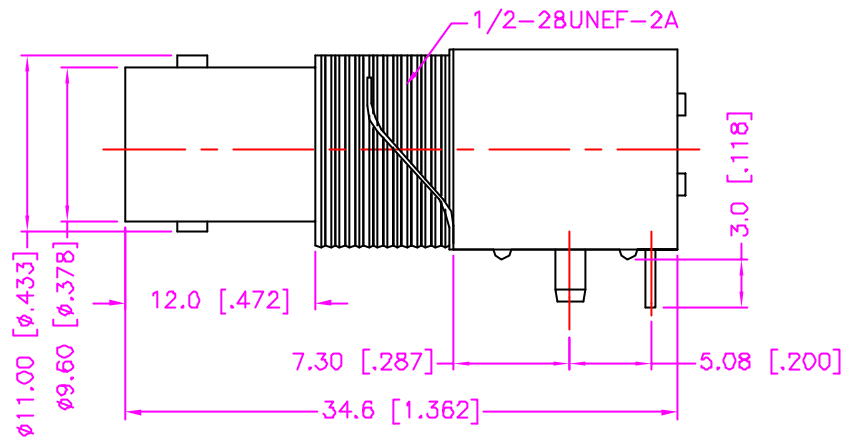


REV.	DESCRIPTION	DATE
—	RELEASE	Jun. 28, 2000
1	P/N MODIFY	Jun. 1, 2001
2		

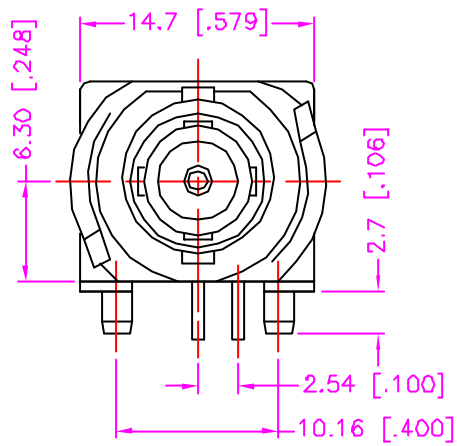


RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW



RECOMMEND PANEL CUTOUT

ORDER INFORMATION :

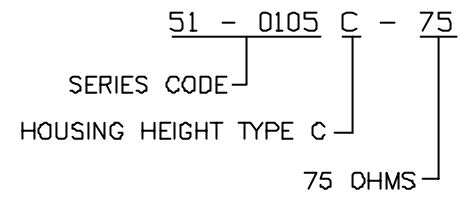

MATERIALS

- HOUSING : P.B.T. (UL 94V-0), BLACK.
- INSULATOR : PE-606
- BODY : ZINC ALLOY, NICKEL PLATING.
- CENTER CONTACT : COPPER ALLOY, GOLD PLATING.
- SOLDER TAIL : COPPER ALLOY, TIN PLATING.
- POST : BRASS, TIN PLATING.
- SPRING : COPPER ALLOY, NICKEL PLATING.

SPECIFICATION

- DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- DURABILITY : 500 CYCLES.
- FREQUENCY RANGE : 0~2 GHz.

TOLERANCE .0±.38 [.015] .00±.25 [.010] .000±.XXX .0000±. ANG.=±3°		DRAWER <i>FUC</i> CHECK <i>Katharin</i> APP'D <i>W3382V</i>	 ASTRON TECHNOLOGY CORP. NAME BNC ALL PLASTIC WITH SPRING RIGHT ANGLE
UNITS : mm [inch] 		PRODUCT SPEC. —	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. B
		DRAW NO. C505-0001	10007