


REV.	DESCRIPTION	DATE
—	RELEASE	June 21, 2000
1		
2		

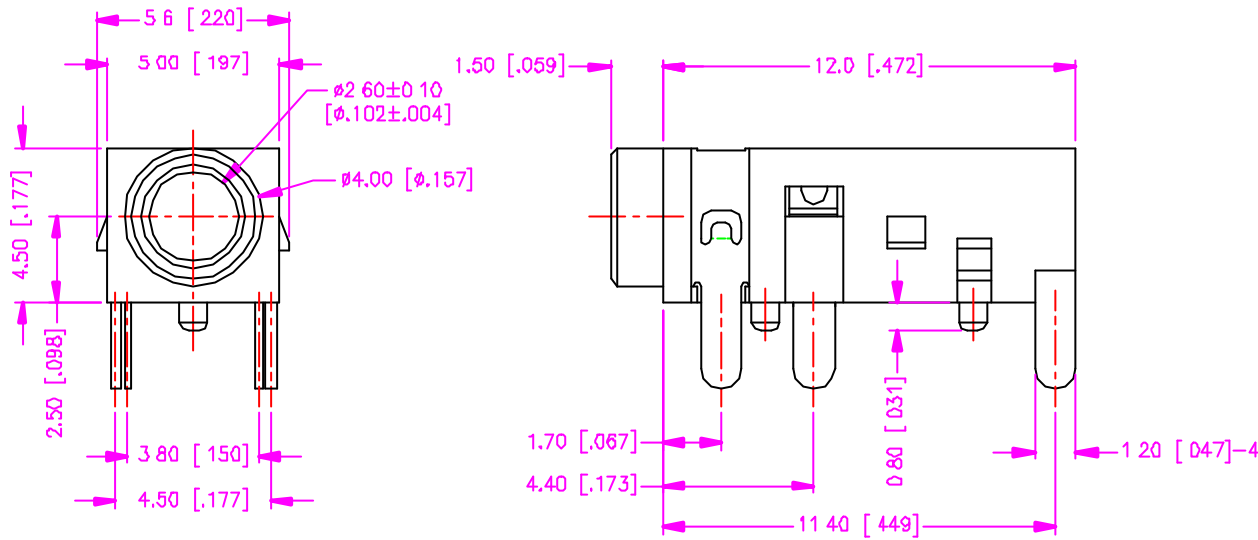




### MATERIALS

- HOUSING : P.B.T. (UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY, SILVER PLATING.

### SPECIFICATION


- CURRENT RATING : 0.3 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 250V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 100M OHMS MIN. AT 250V DC
- CONTACT RESISTANCE : 50m OHMS MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- DURABILITY : 5000 CYCLES.
- MATING FORCE : 0.3 ~ 3.0kgs.
- UNMATING FORCE : 0.3 ~ 3.0kgs.

### ORDER INFORMATION

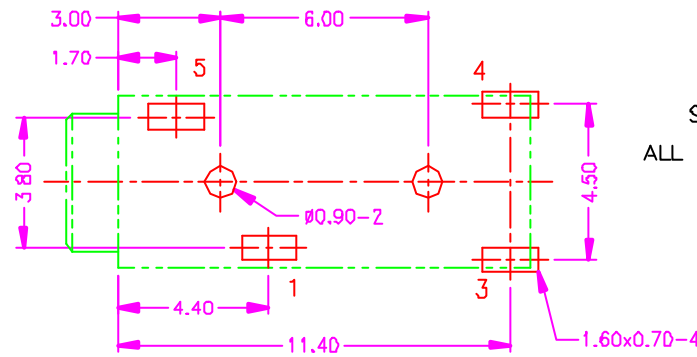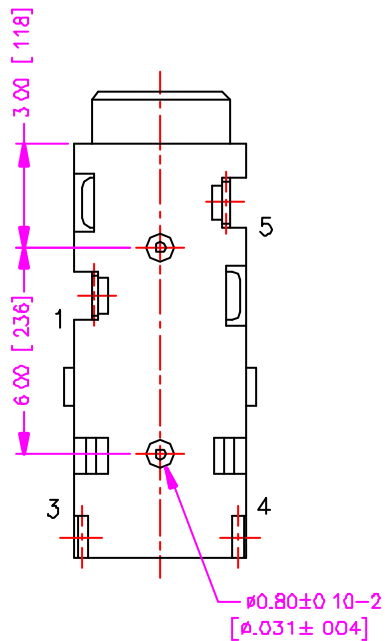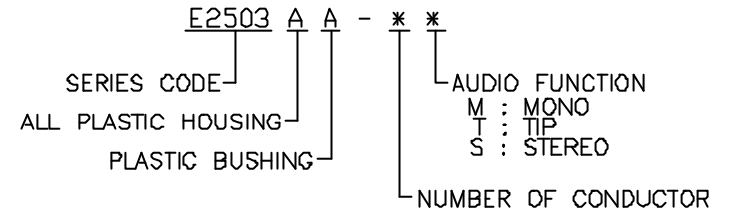

RECOMMEND P.C.B LAYOUT  
BOTTOM VIEW

### SCHEMATIC

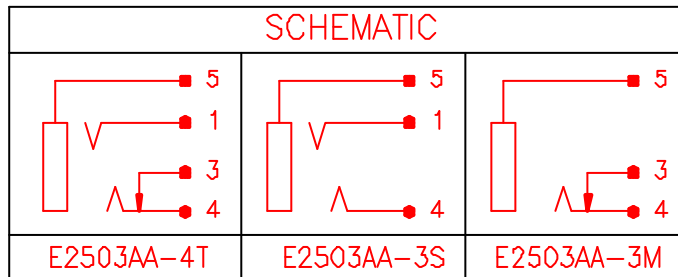

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±XXX .0000=± ANG.=±3° UNITS : mm [inch]	DRAWER <i>Katherlin</i>	<b>Astron</b> ASTRON TECHNOLOGY CORP NAME EARPHONE JACK 2.50mm DIA. ALL PLASTIC DRAW NO. C506-0002		
	CHECK <i>Sue</i>			
	APP'D <i>Wisely</i>			
	PRODUCT SPEC. —			
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV <b>A</b>	08005