
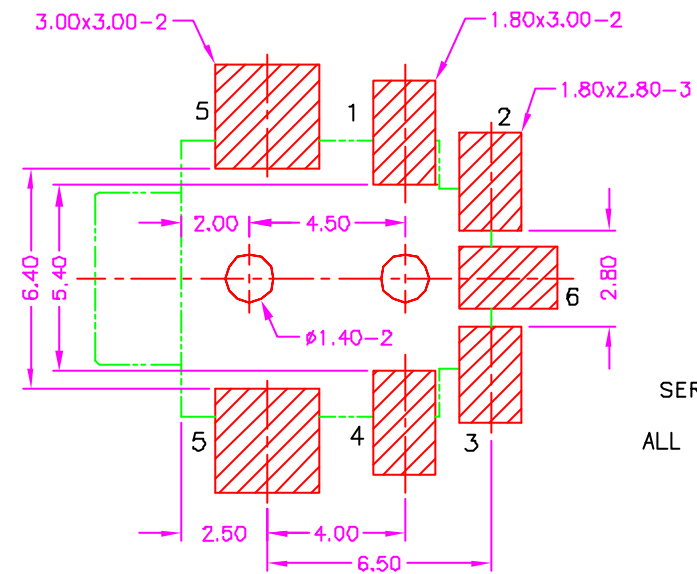
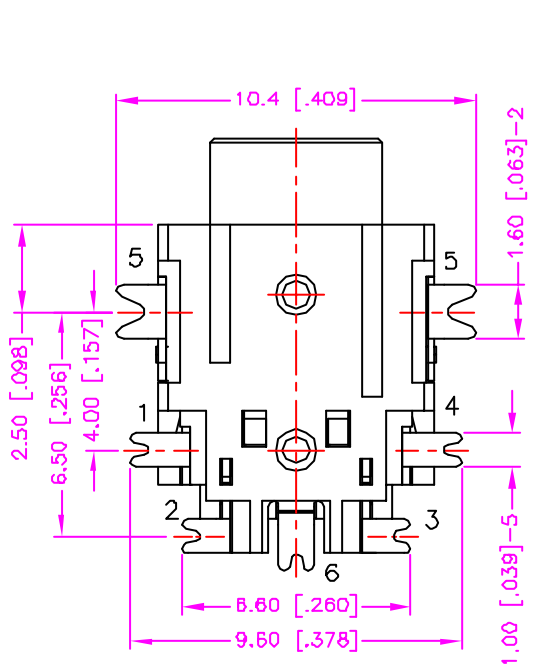


REV.	DESCRIPTION	DATE
A	RELEASE	Mar. 20, 2003
B	DRAW MODIFY	Feb. 19, 2004
C		

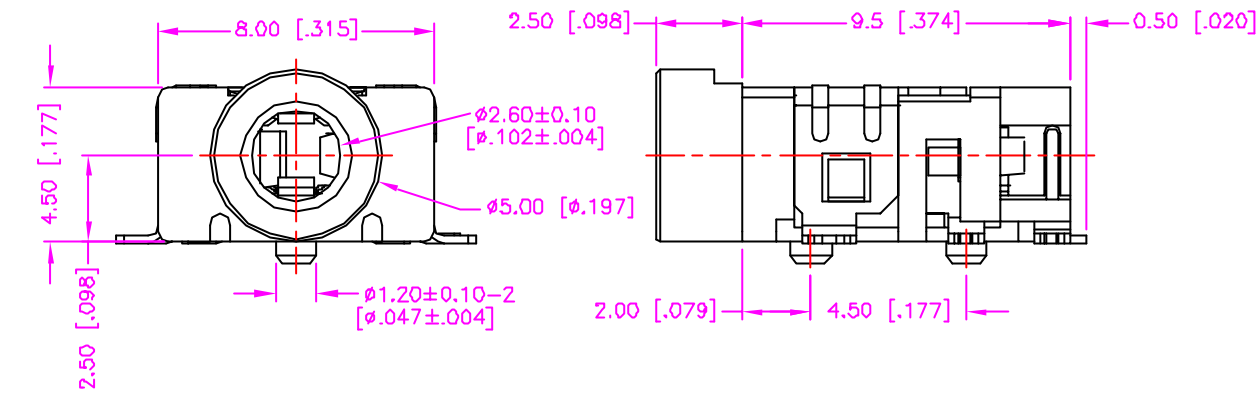

RECOMMEND P.C.B. LAYOUT
TOP VIEW


MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY, SILVER PLATING.

SPECIFICATION

1. CURRENT RATING : 0.3 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 250V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100M OHMS MIN. AT 250V DC
4. CONTACT RESISTANCE : 50m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. DURABILITY : 5000 CYCLES.
7. MATING FORCE : 0.3 ~ 3.0kgs
8. UNMATING FORCE : 0.3 ~ 3.0kgs.
9. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION

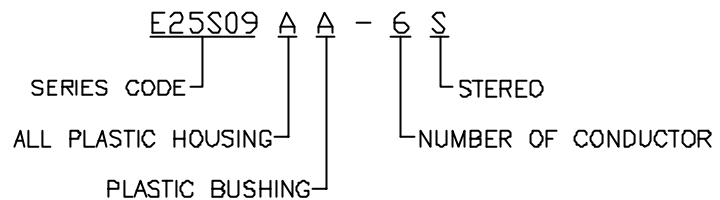

SCHEMATIC	TOLERANCE .0±.30 [.012] .00±.20 [.008] .000±.XXX .0000±. ANG.=±3°	DRAWER <i>PUB</i>		Astron WWW.ASTRON.COM.TW NAME EARPHONE JACK 2.50mm DIA. SMT TYPE, ALL PLASTIC
	UNITS : mm [inch]	CHECK <i>Katherlin</i>		
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. B	DRAW NO. C507-0015
				08005