


REV.	DESCRIPTION	DATE
—	RELEASE	Apr. 23, 2001
1		
2		

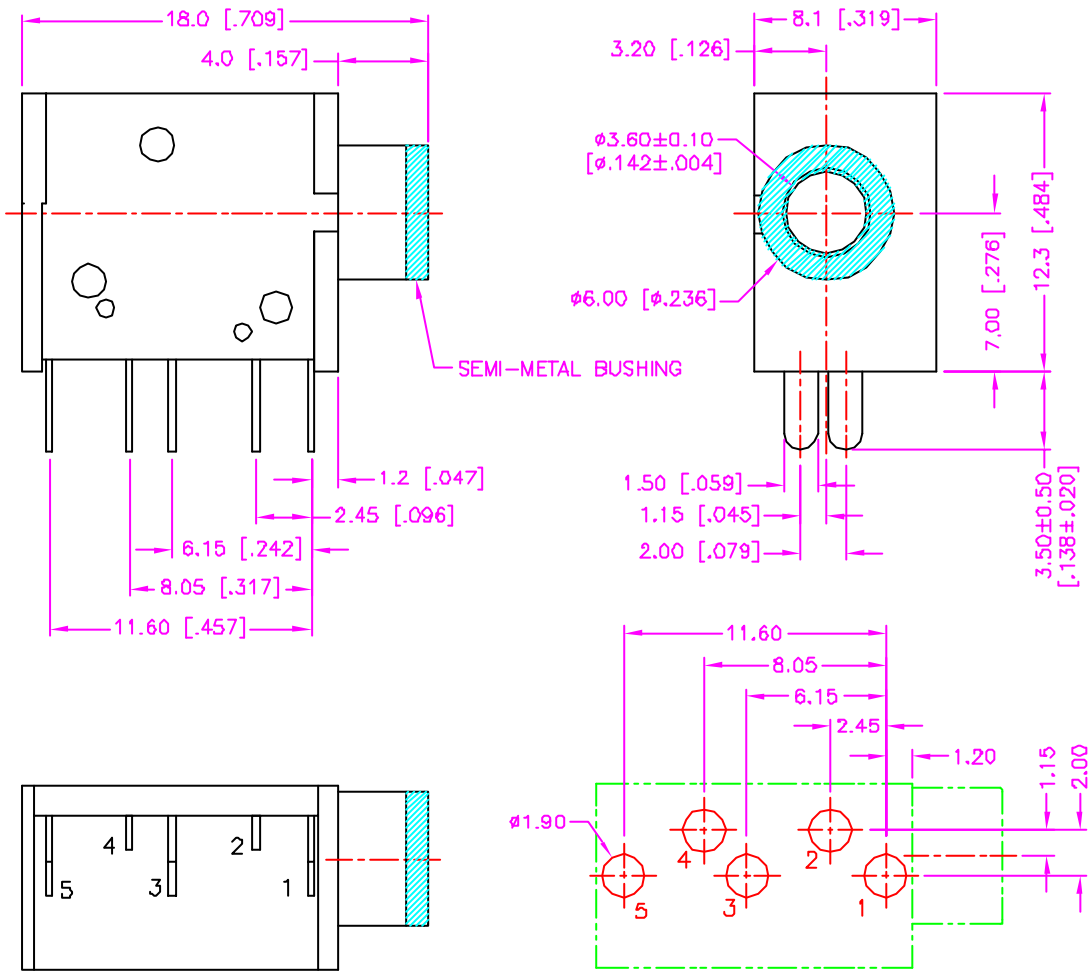


MATERIALS

- HOUSING : P.B.T. (UL 94V-0), BLACK.
- PLASTIC COVER OPTIONS :
BLACK COVER : P.B.T. (UL 94V-0), BLACK.
TRANSPARENT COVER : P.C. (UL 94V-0), NATURE.
- TERMINAL : COPPER ALLOY, TIN PLATING. (t=0.30mm)
- METAL BUSHING : COPPER ALLOY, NICKEL PLATING.


SPECIFICATION

- CURRENT RATING : 0.3 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 100M OHMS MIN.
AT 500V DC.
- CONTACT RESISTANCE : 50m OHMS MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C
- DURABILITY : 5000 CYCLES.
- MATING FORCE : 0.4 ~ 3.0kgs.
- UNMATING FORCE : 0.4 ~ 3.0kgs.

ORDER INFORMATION :

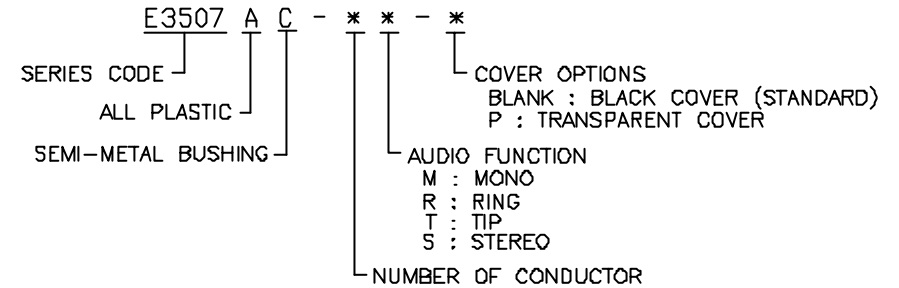

**RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW**

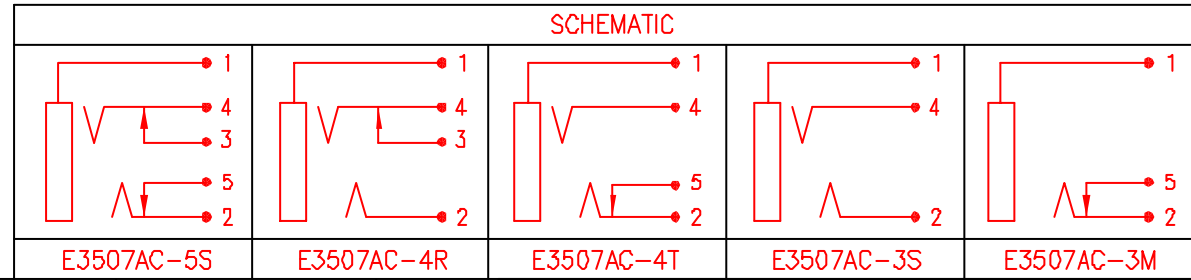

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.xxx .0000=±. ANG.=±3°		DRAWER <i>Katherlin</i> CHECK <i>See</i> APP'D <i>Wisaby</i>	ASTRON TECHNOLOGY CORP. NAME EARPHONE JACK 3.50mm DIA. ALL PLASTIC SEMI-METAL BUSHING
UNITS : mm [inch] 511-0022		PRODUCT SPEC. — DRAW NO. C511-0007	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A
D8005			D8005