


REV.	DESCRIPTION	DATE
—	RELEASE	Mar, 27, 2001
1		
2		

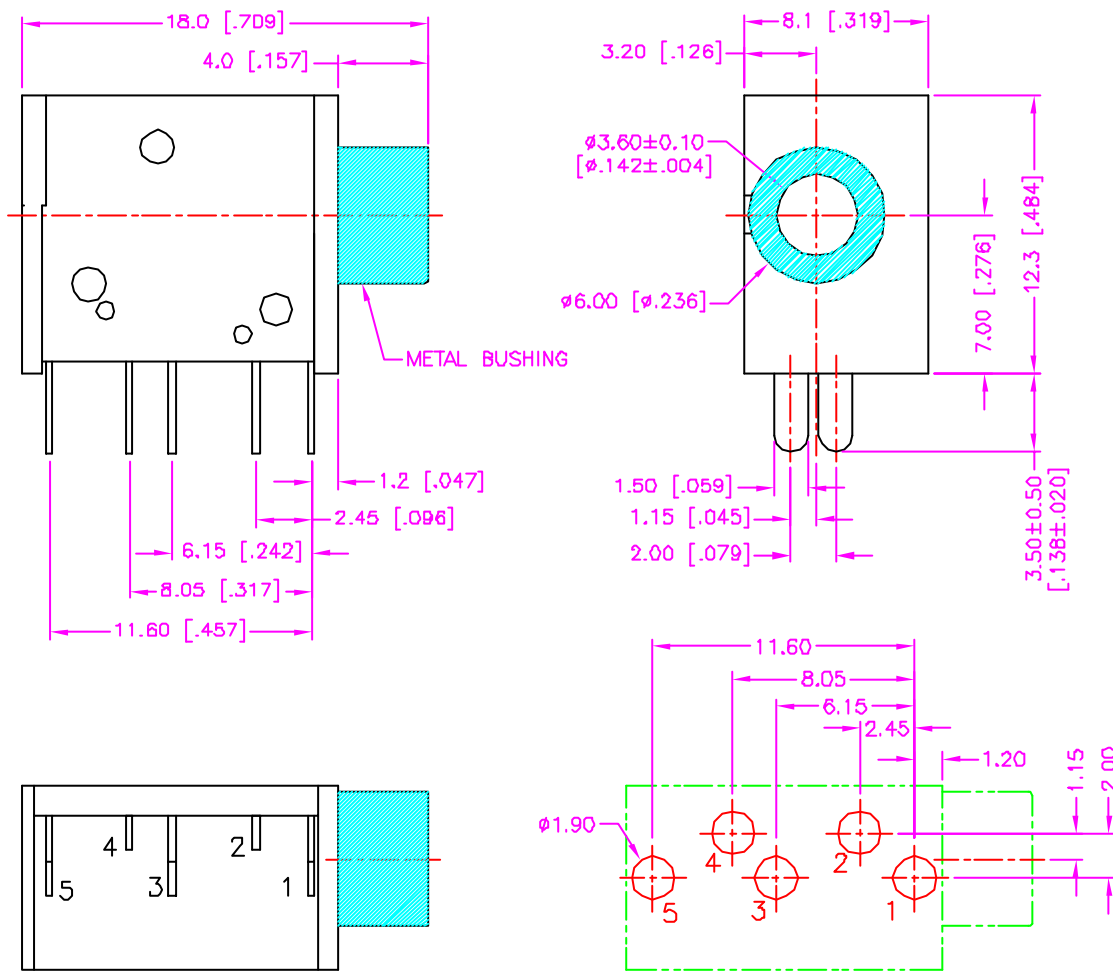


MATERIALS

1. HOUSING : P.B.T. (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY, TIN PLATING. (t=0.30mm)
3. METAL BUSHING : BRASS, NICKEL PLATING.


SPECIFICATION

1. CURRENT RATING : 0.3 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 50m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C
6. DURABILITY : 5000 CYCLES.
7. MATING FORCE : 0.4 ~ 3.0kgs.
8. UNMATING FORCE : 0.4 ~ 3.0kgs.

ORDER INFORMATION :

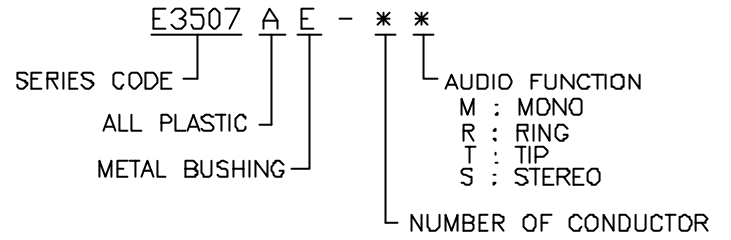

**RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW**

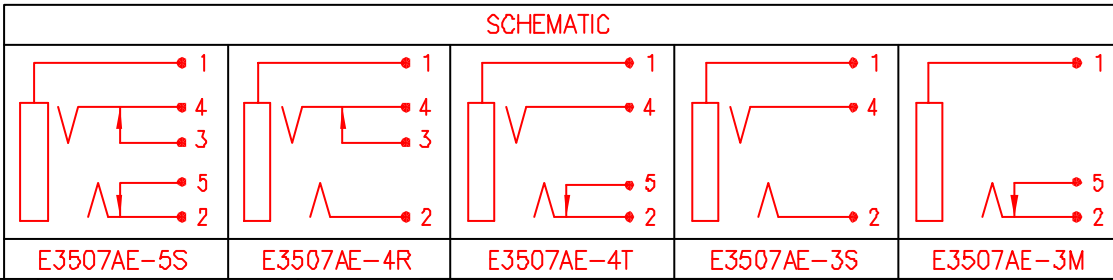

TOLERANCE .0=±.0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>Katherine</i>	Astron ASTRON TECHNOLOGY CORP.	
	CHECK <i>Sue</i>		NAME EARPHONE JACK 3.50mm DIA. ALL PLASTIC, METAL BUSHING
	UNITS : mm [inch]	APP'D <i>Wisely</i>	DRAW NO. C511-0012
	SCALE NONE SIZE A4	PRODUCT SPEC. 511-0002	REV. A 08005