


REV.	DESCRIPTION	DATE
A	RELEASE	Jun. 03, 2002
B	DRAW MODIFY	Feb. 06, 2003
C	P/N MODIFY	Apr. 01, 2003
D	P/N MODIFY	Oct. 15, 2003
E	P/N MODIFY	Feb. 18, 2004

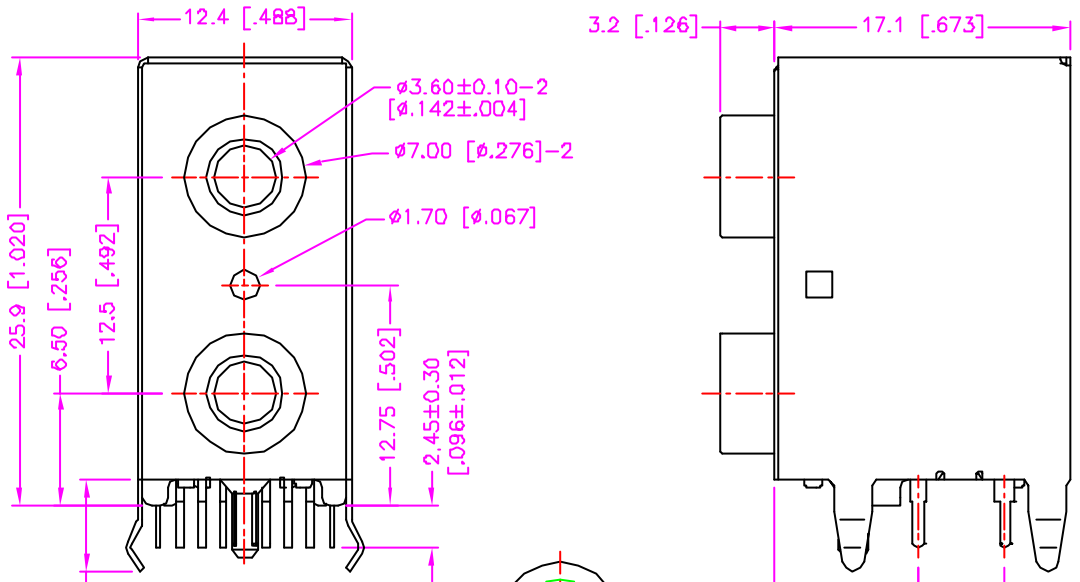

MATERIALS

- HOUSING : POLYESTER (UL 94V-0).
- TERMINAL : COPPER ALLOY.
#1, #4, #5 GOLD PLATING ON CONTACT, TIN PLATING ON TAIL.
#2, #3, #21, #22, #23, #24 TIN PLATING ON TERMINAL.
- FRONT SHIELD : BRASS, NICKEL PLATING. (t=0.20mm)
- BACK SHIELD : BRASS, TIN PLATING. (t=0.30mm)



SPECIFICATION

- CURRENT RATING : 0.3 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC
- CONTACT RESISTANCE : 50m OHMS MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- DURABILITY : 5000 CYCLES.
- MATING FORCE : 0.4 ~ 3.0kgs
- UNMATING FORCE : 0.4 ~ 3.0kgs.

ORDER INFORMATION

DE35 03 B A - 1 - **

- SERIES CODE
- TYPE 03
- HOUSING WITH METAL SHIELD
- PLASTIC BUSHING
- SEE SCHEMATIC
- BUSHING COLOR OPTIONS
 - S5 : PANTONE, BLUE 284C / GREEN 577C IN HOUSING COLOR (TOP/ BOTTOM)
 - S6 : PANTONE, GREEN 577C / PINK 701C IN HOUSING COLOR (TOP/ BOTTOM)
 - S8 : PANTONE, PINK 701C / GREEN 577C IN HOUSING COLOR (TOP/ BOTTOM)
 - S10 : ORANGE / BLACK IN HOUSING COLOR (TOP/ BOTTOM)

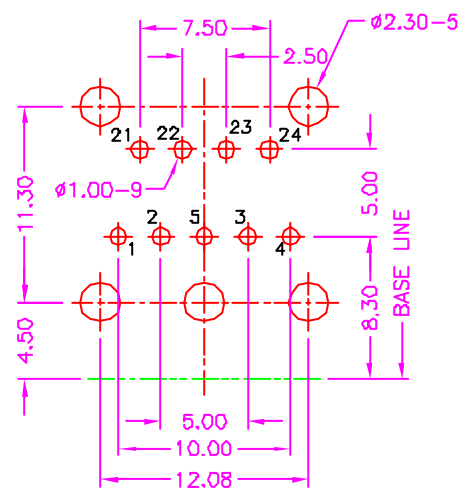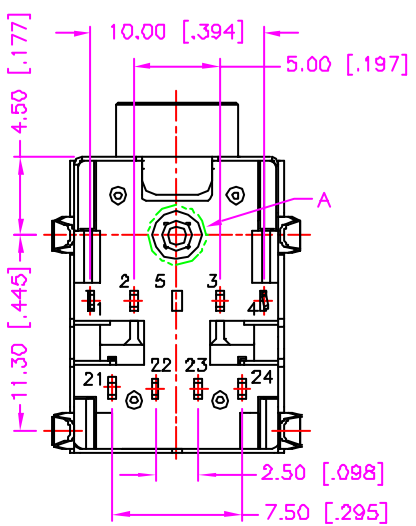

RECOMMEND P.C.B LAYOUT
TOP VIEW

SCHEMATIC		DRAWER		NAME	
	TOLERANCE	<i>PUB</i> CHECK <i>Katherlin</i> APP'D <i>LFON</i>	Astron WWW.ASTRON.COM.TW		STACKED EARPHONE JACK 3.50mm DIA.
	.0±.30 [.012] .00±.20 [.00B] .000±.XXX .0000±. ANG.=±3°			PRODUCT SPEC. —	
UNITS : mm [inch]	SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. E	08005/10004