
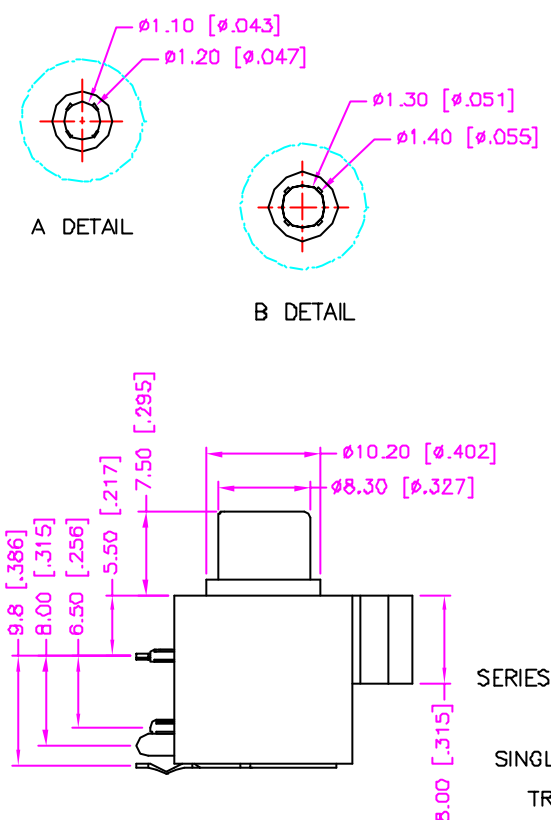


REV.	DESCRIPTION	DATE
—	RELEASE	Apr. 09, 2001
1	RING COLOR ADD.	Jun. 01, 2001
2	DRAW MODIFY	Jun. 06, 2002

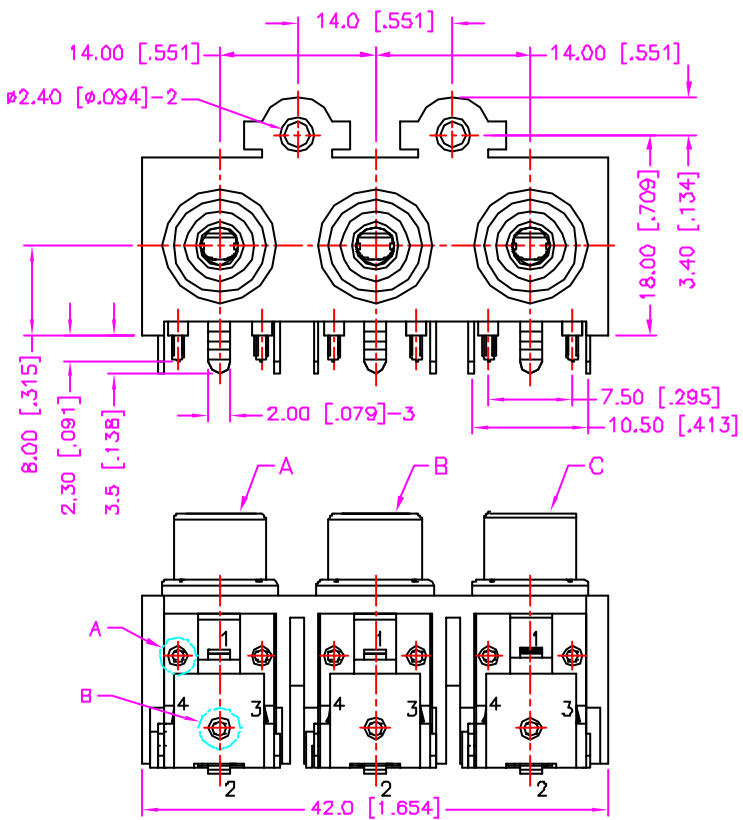



**MATERIALS**

1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. INSERT RING : POLYESTER (UL 94V-0).
3. GANG HOLDER : A.B.S. (UL 94V-0), BLACK.
4. METAL BUSHING : BRASS, NICKEL PLATING. (t=0.10mm)
5. TERMINAL : COPPER ALLOY, TIN PLATING.

**SPECIFICATION**

1. CURRENT RATING : 0.3 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. DURABILITY : 5000 CYCLES.
7. MATING FORCE : 0.4 ~ 3.0kgs.
8. UNMATING FORCE : 0.4 ~ 3.0kgs.

**ORDER INFORMATION**

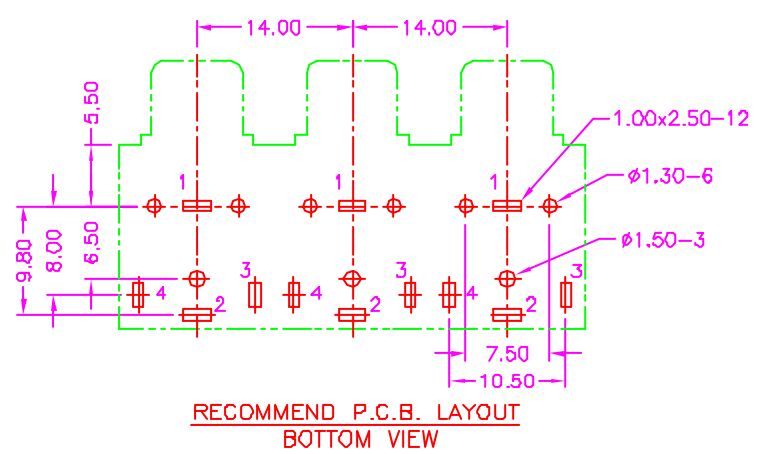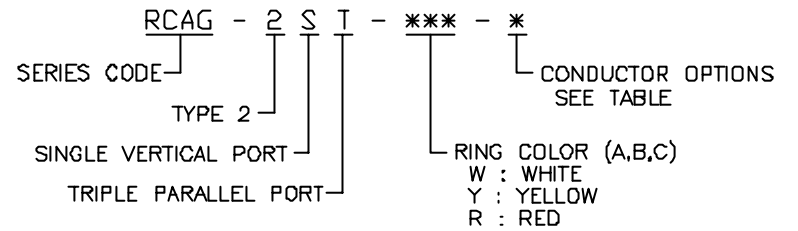

CONDUCTOR OPTIONS	SCHEMATIC		
	A	B	C
1			
2			
3			
4			

TOLERANCE .0±.30 [.012] .00±.20 [.008] .000±.XXX .0000±. ANG.=±3°	DRAWER <i>Katherlin</i> CHECK <i>PUE</i> APP'D <i>W382Y</i> PRODUCT SPEC.	 <b>ASTRON TECHNOLOGY CORP.</b> NAME RCA GANG JACK - Ø8.30mm RIGHT ANGLE
UNITS : mm [inch] SCALE NDNE SIZE A4 SHEET 1 OF 1 REV. C	DRAW NO. C516-0001 08005	