
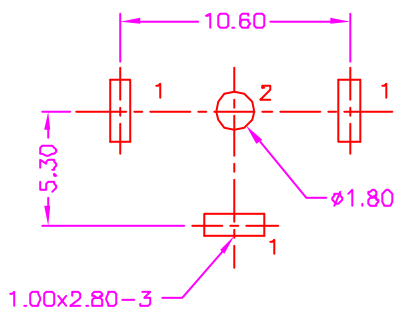

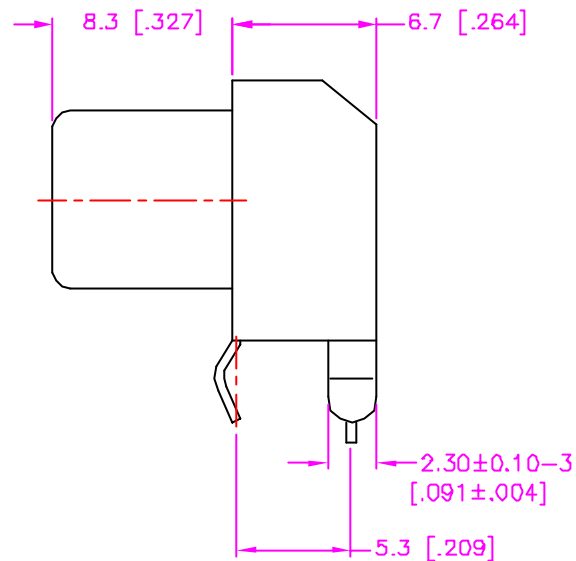


REV.	DESCRIPTION	DATE
—	RELEASE	Sep. 18, 2000
1	DRAW MODIFY	Jun. 29, 2001
2	DRAW MODIFY	Feb. 07, 2003

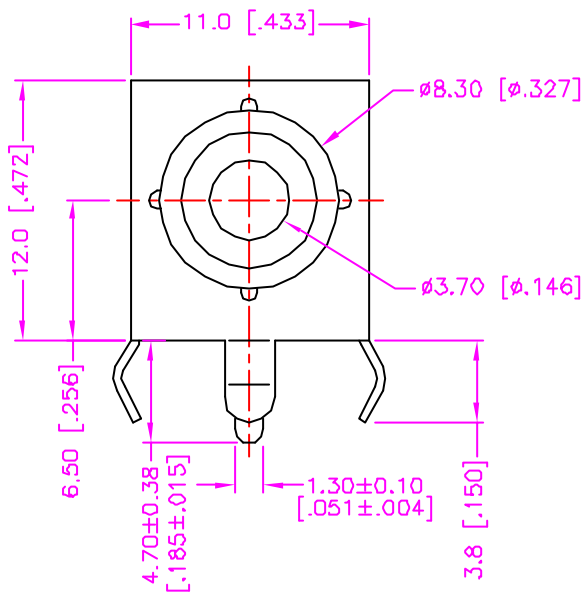

RECOMMEND P.C.B. LAYOUT
TOP VIEW


MATERIALS

1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. RING : POLYESTER (UL 94V-0).
3. TERMINAL : BRASS, TIN PLATING. (t=0.25mm)
4. SHIELD : SPCC, TIN PLATING. (t=0.40mm)

SPECIFICATION

1. CURRENT RATING : 0.3 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC
4. CONTACT RESISTANCE : 50m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. DURABILITY : 5000 CYCLES.
7. MATING FORCE : 0.4 ~ 3.0kgs.
8. UNMATING FORCE : 0.4 ~ 3.0kgs.

ORDER INFORMATION

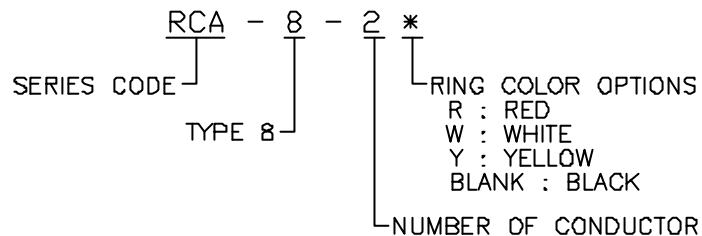

SCHEMATIC		TOLERANCE	DRAWER	ASTRON TECHNOLOGY CORP.
	.0±.30 [.012]	DRAWER <i>PUB</i>	CHECK <i>LSJON</i>	
	.00±.20 [.008]	APP'D <i>Katherine</i>		PRODUCT SPEC.
	.000±.XXX	—	—	DRAW NO. C517-0009
	.0000±.	UNITS : mm [inch]	SCALE NONE	SHEET 1 OF 1
ANG.=±3°	SIZE A4	08005		