
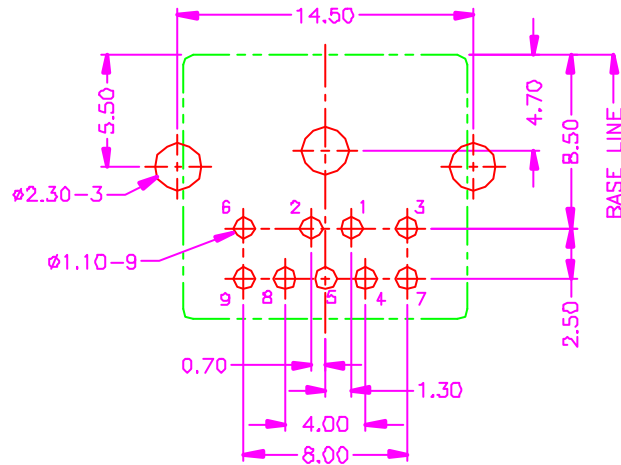
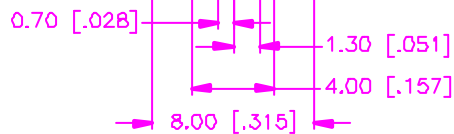

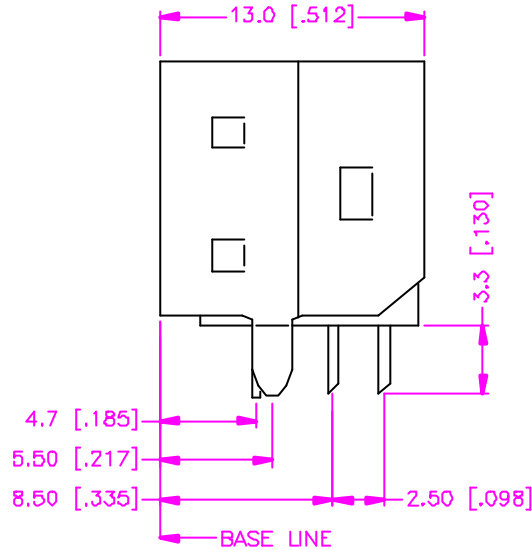


REV.	DESCRIPTION	DATE
—	RELEASE	Jun. 30, 2000
1		
2		

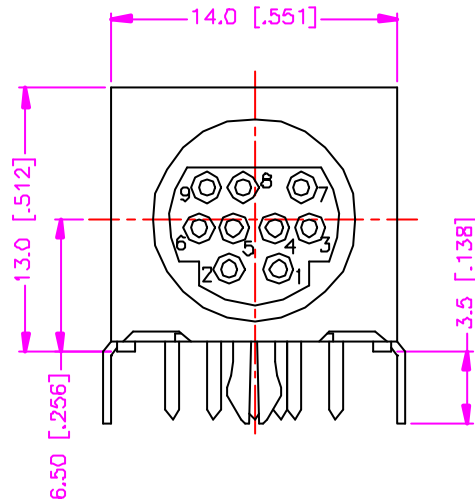

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

MATERIALS

- HOUSING : P.B.T. (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.
- SHIELD : BRASS, TIN PLATING. (t=0.30mm)

SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE
- INSULATION RESISTANCE : 100M OHMS MIN AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- DURABILITY : 1000 CYCLES.
- MATING FORCE : 0.5 ~ 4.5kgs.
- UNMATING FORCE : 0.5 ~ 4.5kgs

ORDER INFORMATION

13 - 0501 - 9 - * T

SERIES CODE

NUMBER OF POSITION

TIN PLATING ON SOLDER TAIL

CONTACT PLATING OPTIONS

- GOLD FLASH
- .000010" GOLD
- .000015" GOLD
- .000030" GOLD

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=± XXX .0000=±. ANG.=±3°	DRAWER <i>Katherine</i>	 ASTRON TECHNOLOGY CORP.
	CHECK <i>Sue</i>	
 UNITS : mm [inch]	APP'D <i>Wisely</i>	DRAW NO. C535-0102
	PRODUCT SPEC. 522-DD36 522-DD46	REV. 08005
SCALE NONE	SIZE A4	SHEET 1 OF 1