

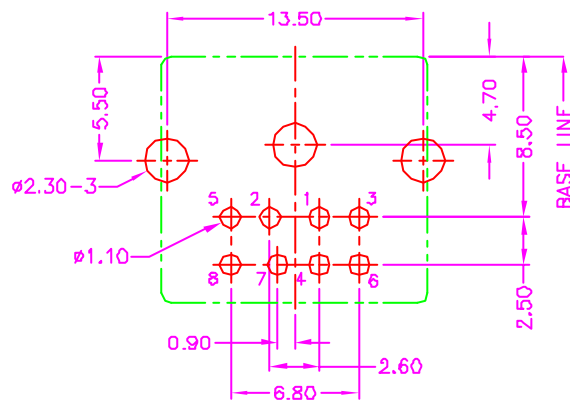

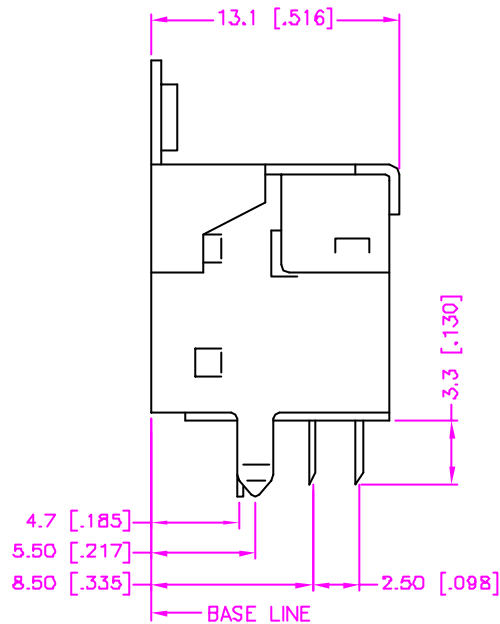


REV.	DESCRIPTION	DATE
—	RELEASE	Jun. 30, 2000
1		
2		

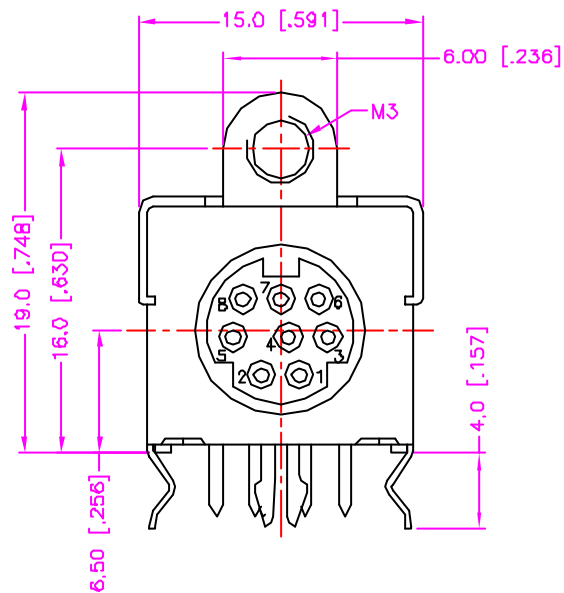

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

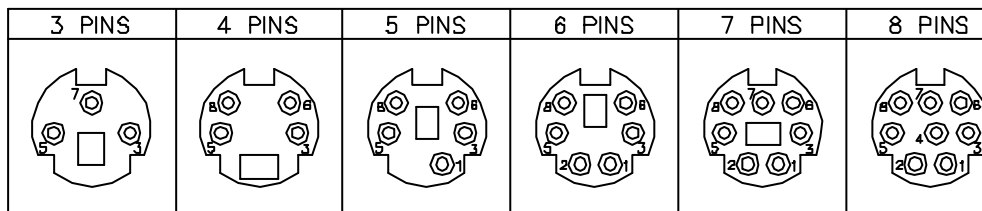


MATERIALS

- HOUSING : P.B.T. (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.
- SHIELD : BRASS, TIN PLATING. (t=0.30mm)
- FLANGE : SPCC, NICKEL PLATING. (t=0.40mm)

SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- DURABILITY : 1000 CYCLES.
- MATING FORCE : 0.5 ~ 4.5kgs.
- UNMATING FORCE : 0.5 ~ 4.5kgs.

ORDER INFORMATION

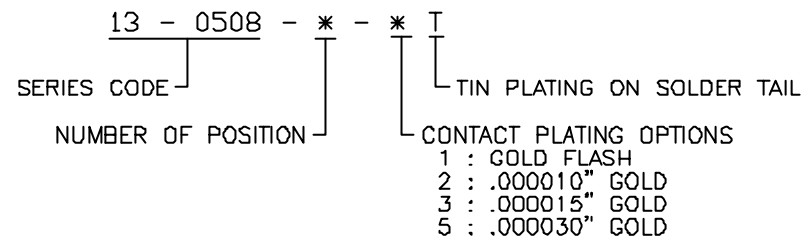

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>Katherlin</i> CHECK <i>Jua</i> APP'D <i>Wisely</i>	 ASTRON TECHNOLOGY CORP. NAME MINI. CIRCULAR DIN P.C.B. MOUNT RIGHT ANGLE, FEMALE FULL METAL SHIELD, WITH M3 THREAD (WITHOUT BACK SHIELD)
UNITS : mm [inch]	PRODUCT SPEC. — 522-0019	
SCALE NONE	SIZE A4	DRAW NO. C535-0801
SHEET 1 OF 1	REV. A	08005