
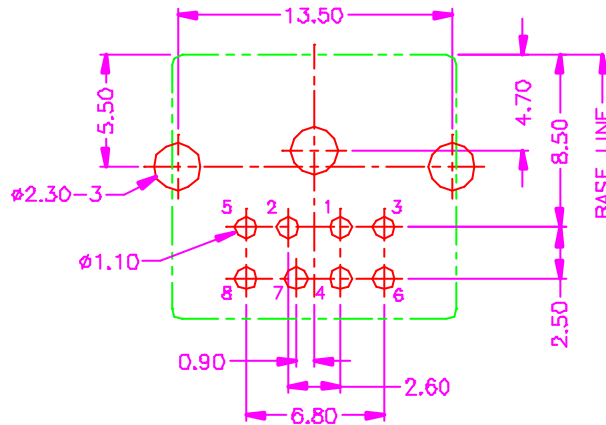
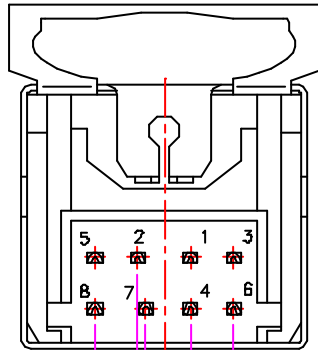
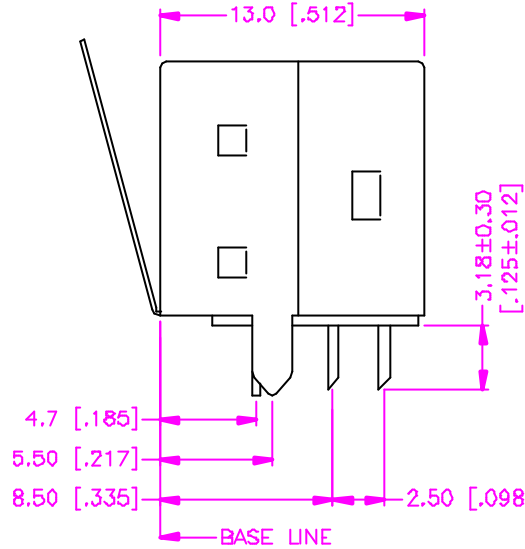


REV.	DESCRIPTION	DATE
—	RELEASE	Jun. 29, 2000
1	P/N MODIFY	Nov. 18, 2000
2	DRAW MODIFY	Jan. 18, 2002
3	DRAW MODIFY	Jun. 28, 2002

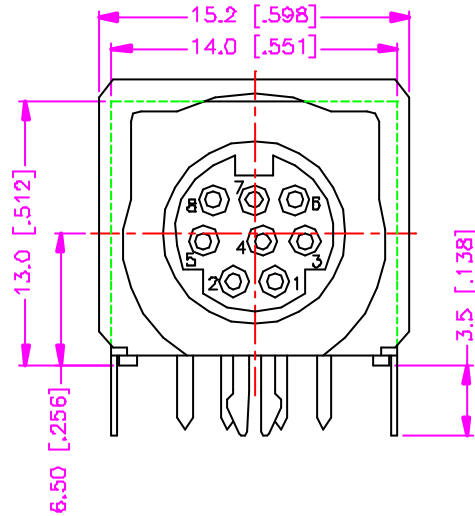

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

MATERIALS

- HOUSING : THERMOPLASTIC (UL 94V-0).
- TERMINAL ; PHOSPHOR BRONZE.
- SHIELD : BRASS, TIN PLATING. (t=0.30mm)
- SPRING : STAINLESS STEEL. (t=0.20mm)

SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- DURABILITY : 1000 CYCLES.
- MATING FORCE : 0.5 ~ 4.5kgs.
- UNMATING FORCE : 0.5 ~ 4.5kgs.
- MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS. (HI.-TEMP. PLASTIC)


ORDER INFORMATION

13 - 0601 * - * * - * T

SERIES CODE | HOUSING OPTIONS | NUMBER OF POSITION | CONTACT PLATING OPTIONS | HOUSING COLOR OPTIONS

BLANK : P.B.T. | H : HI.-TEMP. PLASTIC | 1 : GOLD FLASH | S1 : PANTONE PURPLE 2715C
2 : .000010" GOLD | 2 : .000010" GOLD | S2 : PANTONE GREEN 3395C
3 : .000015" GOLD | 3 : .000015" GOLD | BLANK : BLACK
5 : .000030" GOLD | 5 : .000030" GOLD

TIN PLATING ON SOLDER TAIL

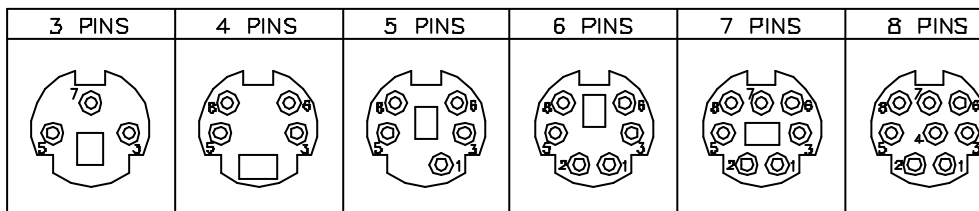

TOLERANCE .0±.30 [.012] .00±.20 [.008] .000±.XXX .0000±. ANG.=±3°	DRAWER <i>Sub</i> CHECK <i>Katherine</i> APP'D <i>ASB</i>	Astron ASTRON TECHNOLOGY CORP. NAME MINI. CIRCULAR DIN P.C.B. MOUNT RIGHT ANGLE FULL METAL SHIELD WITH SPRING FEMALE
UNITS : mm [inch]	PRODUCT SPEC. 522-0021 522-0053	
SCALE NONE	SIZE A4	DRAW NO. C536-0101
SHEET 1 OF 1	REV. D	08005