
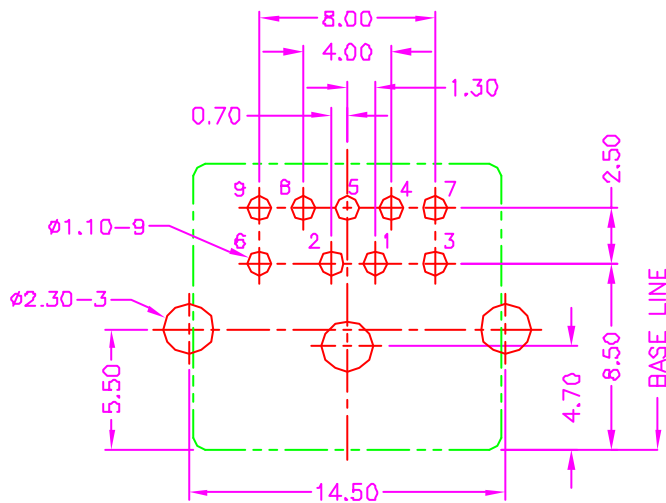
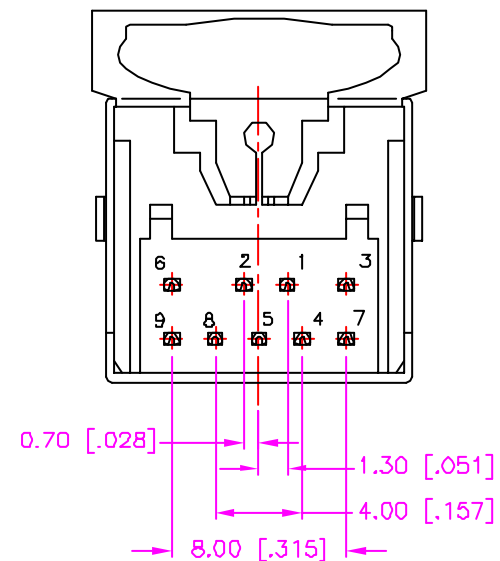
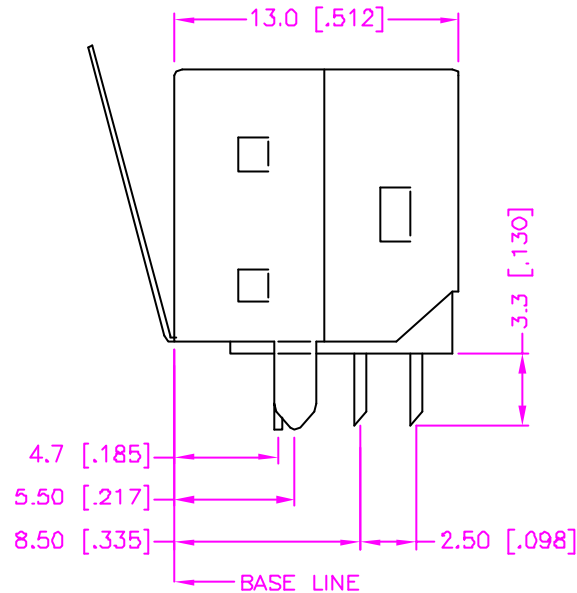


REV.	DESCRIPTION	DATE
—	RELEASE	Jun. 28, 2000
1	DRAW MODIFY	Aug. 21, 2003
2		

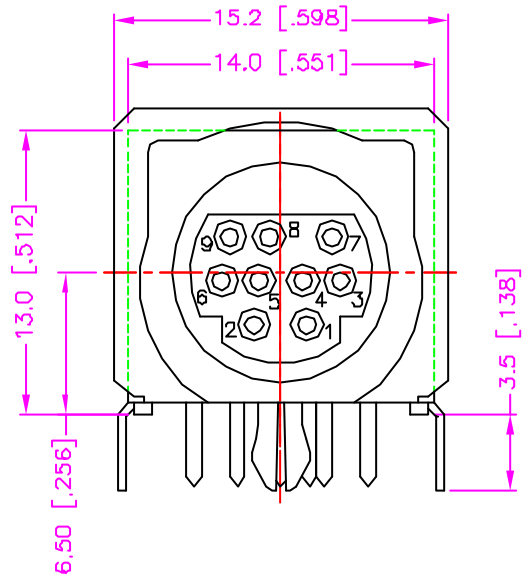

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

- HOUSING : POLYESTER (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE.
- SHIELD : BRASS, TIN PLATING. (t=0.30mm)
- SPRING : STAINLESS STEEL. (t=0.20mm)

SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- DURABILITY : 1000 CYCLES.
- MATING FORCE : 0.5 ~ 4.5kgs.
- UNMATING FORCE : 0.5 ~ 4.5kgs.

ORDER INFORMATION

13 - 0601 - 9 - * T

SERIES CODE | NUMBER OF POSITION | CONTACT PLATING OPTIONS

TIN PLATING ON SOLDER TAIL

CONTACT PLATING OPTIONS
 1 : GOLD FLASH
 2 : .000010" GOLD
 3 : .000015" GOLD
 5 : .000030" GOLD

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>Katherlin</i> CHECK <i>MS</i> APP'D <i>LJON</i>	 ASTRON TECHNOLOGY CORP. NAME MINI. CIRCULAR DIN P.C.B. MOUNT RIGHT ANGLE FULL METAL SHIELD, FEMALE WITH SPRING
UNITS : mm [inch]	PRODUCT SPEC. — 522-0030	
SCALE NONE	SIZE A4	DRAW NO. C536-0102
SHEET 1 OF 1	REV. B	08005