
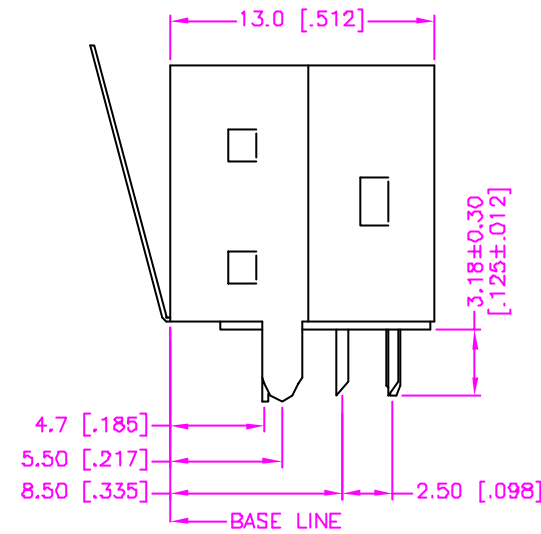


REV.	DESCRIPTION	DATE
—	RELEASE	Sep. 16, 2002
1	DRAW MODIFY	Jan. 02, 2003
2		

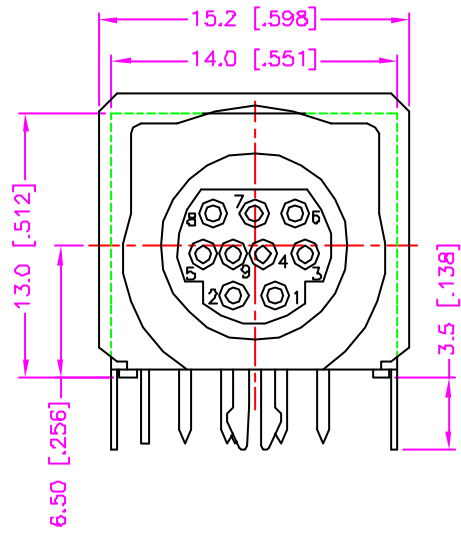




MATERIALS

1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE.
3. TERMINAL(#9) : PHOSPHOR BRONZE, TIN PLATING.
4. SHIELD : BRASS, TIN PLATING.
5. SPRING : STAINLESS STEEL. (t=0.20mm)


SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. DURABILITY : 1000 CYCLES.
7. MATING FORCE : 0.5 ~ 4.5kgs.
8. UNMATING FORCE : 0.5 ~ 4.5kgs.

ORDER INFORMATION

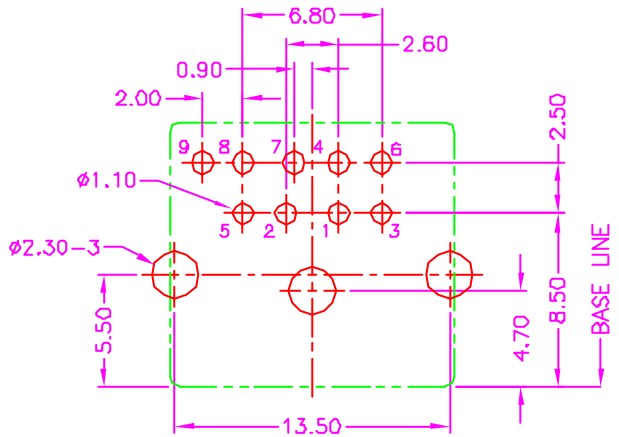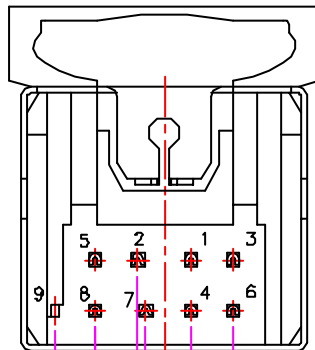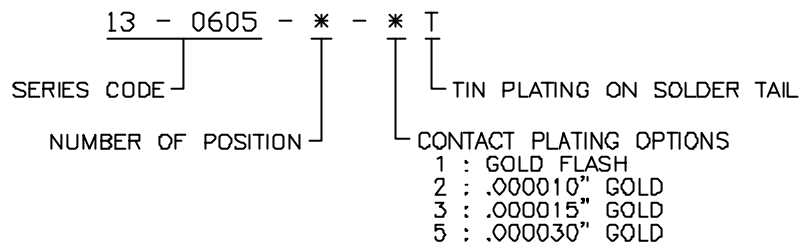

RECOMMEND P.C.B. LAYOUT
TOP VIEW



TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>LYON</i>
UNITS : mm [inch]	CHECK <i>Kathelin</i>
SCALE NONE	APP'D <i>PLS</i>
SIZE A4	PRODUCT SPEC. —
SHEET 1 OF 1	REV. B

Astron	
ASTRON TECHNOLOGY CORP.	
NAME	MINI. CIRCULAR DIN
P.C.B. MOUNT	RIGHT ANGLE, FEMALE
FULL METAL SHIELD	WITH SPRING (GEO-PORT)
DRAW NO.	C536-0503
08005/10004	