
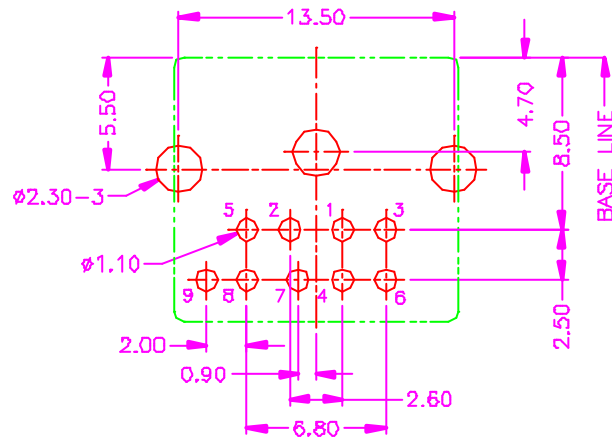
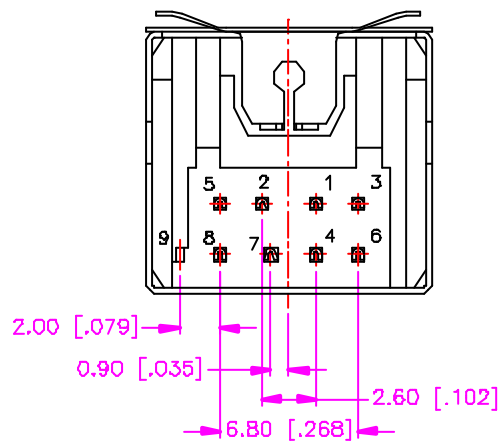


REV.	DESCRIPTION	DATE
—	RELEASE	JUL 08, 2002
1		
2		
3		

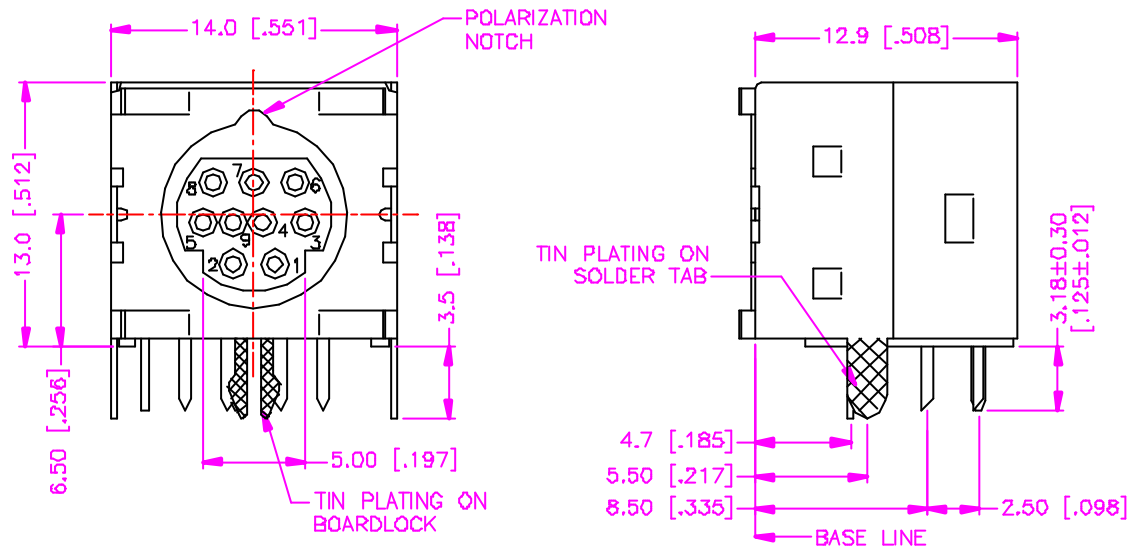

### MATERIALS

- HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE.
- TERMINAL(#9) : PHOSPHOR BRONZE, TIN PLATING.
- SHIELD : BRASS, SOLDER TAB AND BOARDLOCK TIN PLATING, UNDER PLATING NICKEL ALL OVER.
- SPRING : STAINLESS STEEL. (t=0.15mm)

### SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- DURABILITY : 1000 CYCLES.
- MATING FORCE : 0.5 ~ 4.5kgs.
- UNMATING FORCE : 0.5 ~ 4.5kgs.
- MAX. PROCESSING TEMPERATURE : 230°C FOR 30 ~ 60 SECONDS. (HI.-TEMP. PLASTIC)

### ORDER INFORMATION

13 - 0606 \* - \* - \* T

SERIES CODE

TIN PLATING ON SOLDER TAIL

HOUSING OPTIONS

BLANK : NORMAL  
H : HI.-TEMP. PLASTIC

NUMBER OF POSITIONS

CONTACT PLATING OPTIONS

1 : GOLD FLASH  
2 : .000010" GOLD  
3 : .000015" GOLD  
5 : .000030" GOLD

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>PUB</i> CHECK <i>Katherlin</i> APP'D <i>WYBYLY</i>	 ASTRON TECHNOLOGY CORP. NAME MINI. CIRCULAR DIN P.C.B. MOUNT RIGHT ANGLE, FEMALE FULL METAL SHIELD WITH 4 FINGER WITH NOTCH & GEO-PORT DRAW NO. C536-0601
UNITS : mm [inch]	PRODUCT SPEC. —	
SCALE NONE	SIZE A4	SHEET 1 OF 1
	REV. A	D8005

