
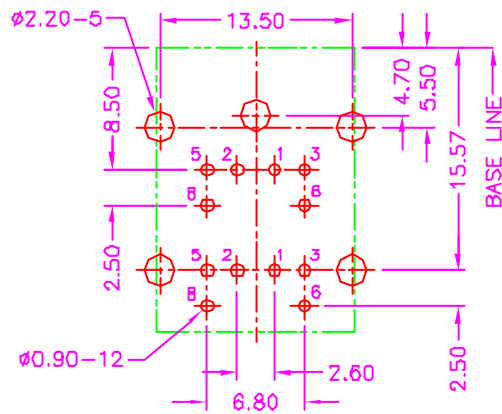
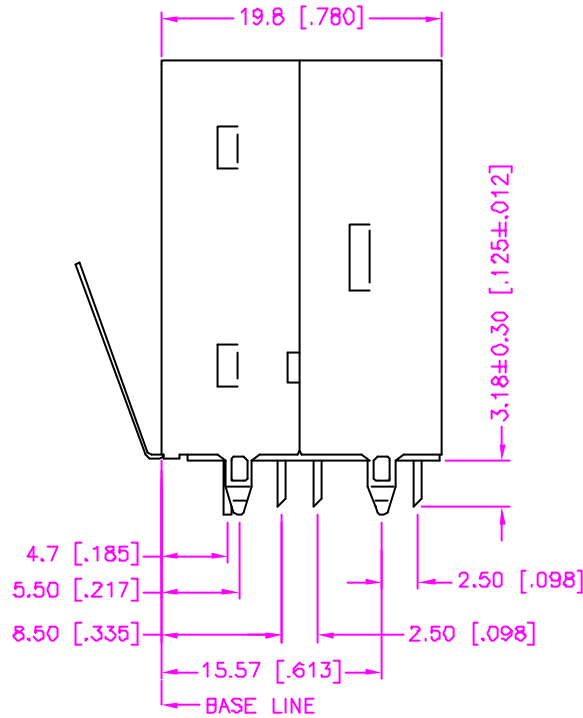


REV.	DESCRIPTION	DATE
—	RELEASE	Oct. 21, 2002
1		
2		

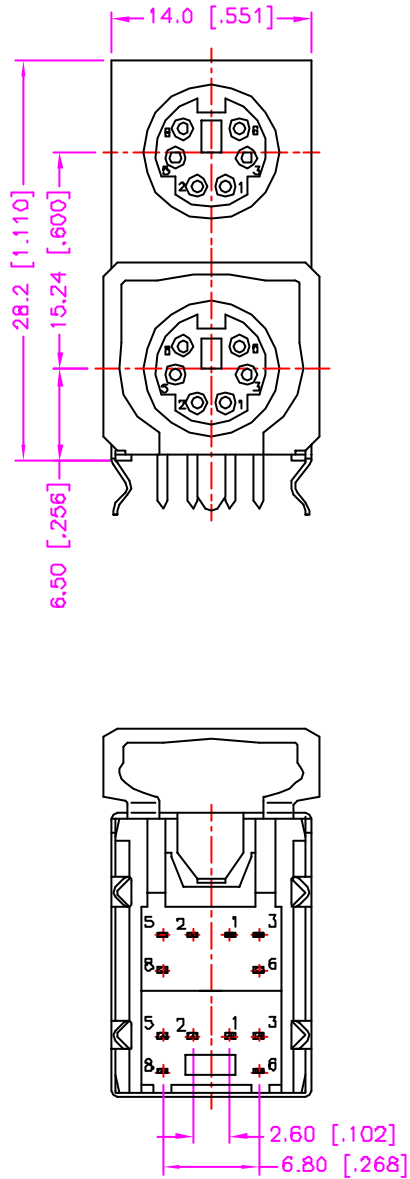

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

MATERIALS

1. HOUSING : POLYESTER (UL 94V-0)
2. TERMINAL : BRASS.
3. SHIELD : BRASS, TIN PLATING. (t=0.30mm)
4. SPRING : STAINLESS STEEL. (t=0.20mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. DURABILITY : 1000 CYCLES.
7. MATING FORCE : 0.5 ~ 4.5kgs.
8. UNMATING FORCE : 0.5 ~ 4.5kgs.

ORDER INFORMATION

13 - 2302 - 66 S3 - * T

SERIES CODE | NUMBER OF POSITION (TOP/BOTTOM) | CONTACT PLATING OPTIONS | TIN PLATING ON SOLDER TAIL

CONTACT PLATING OPTIONS:
 1 : GOLD FLASH
 2 : .000010" GOLD
 3 : .000015" GOLD
 5 : .000030" GOLD

PANTONE GREEN 3395C + PURPLE 2715C

TOLERANCE .0±.30 [.012] .00±.20 [.008] .000±.XXX .0000±. ANG.=±3°		DRAWER <i>Katherlin</i>		 ASTRON TECHNOLOGY CORP. NAME STACKED MINI. CIRCULAR DIN P.C.B. MOUNT RIGHT ANGLE, FEMALE FULL METAL SHIELD, WITH SPRING DRAW NO. C540-0102
 UNITS : mm [inch]		CHECK <i>NUB</i>	APP'D <i>ALST</i>	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	10004