REV.	DESCRIPTION	DATE
A	RELEASE	Jul. 26, 2002
B	DRAW MODIFY	Feb. 06, 2004
C		

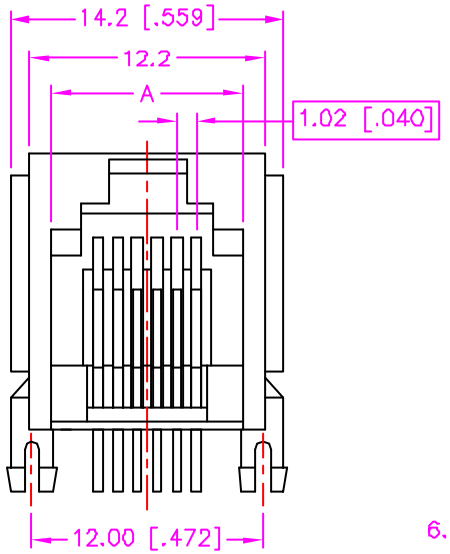

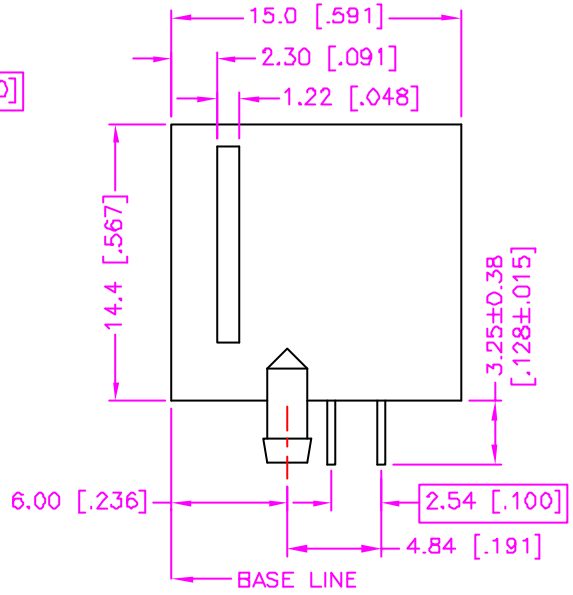

MATERIALS

1. HOUSING : POLYESTER (UL 94V-0).
2. TERMINAL : ø0.45mm PHOSPHOR BRONZE.

SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +70°C.
6. DURABILITY : 750 CYCLES.

ORDER INFORMATION :

17 - 01 03 * - ** * - * G

- 17 - 01 03 : SERIES CODE
- TYPE 03
- * : PANEL STOP OPTIONS
  1 : WITHOUT PANEL STOP
  2 : WITH PANEL STOP
- ** : POSITION & CONTACT SEE TABLE
- * : HOUSING COLOR OPTIONS
  G : GRAY
  BLANK : BLACK
- * : CONTACT PLATING OPTIONS
  1 : GOLD FLASH
  2 : .000010" GOLD
  3 : .000015" GOLD
  5 : .000030" GOLD
  6 : .000050" GOLD
- G : GOLD PLATING ON SOLDER TAIL

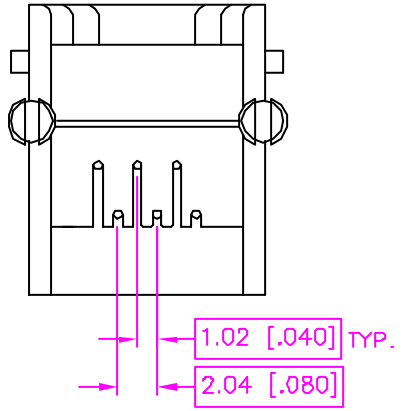

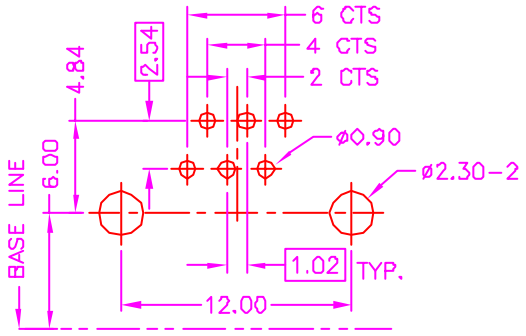

RECOMMEND P.C.B. LAYOUT
TOP VIEW

NUMBER OF POSITIONS	NUMBER OF CONTACT	DIMENSIONS A
4	2/4	7.85[.309]
6	2/4/6	9.90[.390]

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER SUE	Astron WWW.ASTRON.COM.TW
	CHECK Katherlin	
	APP'D LION	NAME MODULAR JACK SIDE ENTRY, ALL PLASTIC
UNITS : mm [inch]	PRODUCT SPEC. —	
	509-0052	DRAW NO. C564-0109
SCALE NONE SIZE A4	SHEET 1 OF 1 REV. B	08015