
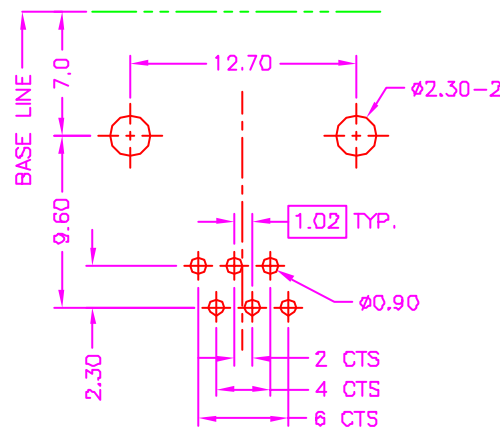
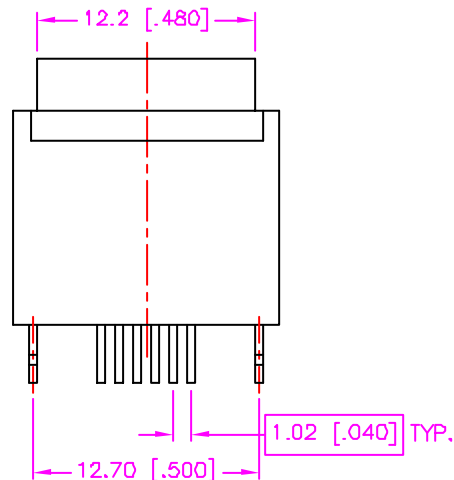


REV.	DESCRIPTION	DATE
—	RELEASE	Aug 14, 2000
1	P/N MODIFY	Jun. 1, 2001
2		

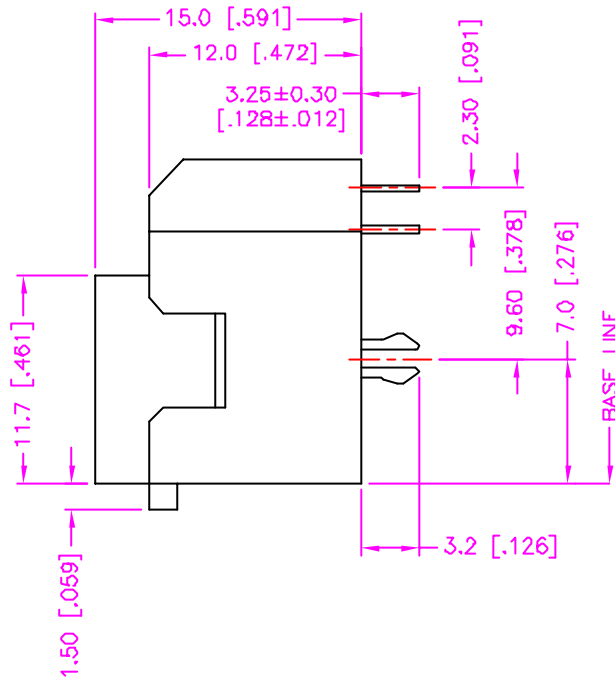

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

MATERIALS

1. HOUSING : P.B.T. (UL 94V-0).
2. TERMINAL : $\phi 0.45\text{mm}$ PHOSPHOR BRONZE.
3. METAL PEG : COPPER ALLOY, TIN PLATING. ($t=0.40\text{mm}$)

SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO $+105^{\circ}\text{C}$.
6. DURABILITY : 750 CYCLES.

ORDER INFORMATION :

17- 21 01 - ** * - * G
 SERIES CODE | TYPE 01 | POSITION & CONTACT | HOUSING COLOR OPTIONS
 62 : 6P2C | BLANK : BLACK (STANDARD)
 64 : 6P4C | G : GRAY
 66 : 6P6C | GOLD PLATING ON SOLDER TAIL | CONTACT PLATING OPTIONS
 1 : GOLD FLASH
 2 : .000010" GOLD
 3 : .000015" GOLD
 5 : .000030" GOLD

TOLERANCE .0=±.0.30 [.012] .00=±0.20 [.008] .000=±.xxx .0000=±. ANG.=±3°	DRAWER <i>Katherine</i> CHECK <i>Lee</i> APP'D <i>Wisaby</i>	 ASTRON TECHNOLOGY CORP. NAME MODULAR JACK TOP ENTRY, ALL PLASTIC
 UNITS : mm [inch]	PRODUCT SPEC. —	
SCALE NONE	SIZE A4	DRAW NO. C564-2102
SHEET 1 OF 1	REV. B	D8015