REV.	DESCRIPTION	DATE
—	RELEASE	Jul. 10, 2002
1	DRAW MODIFY	Aug. 12, 2002
2	DRAW MODIFY	May. 20, 2003

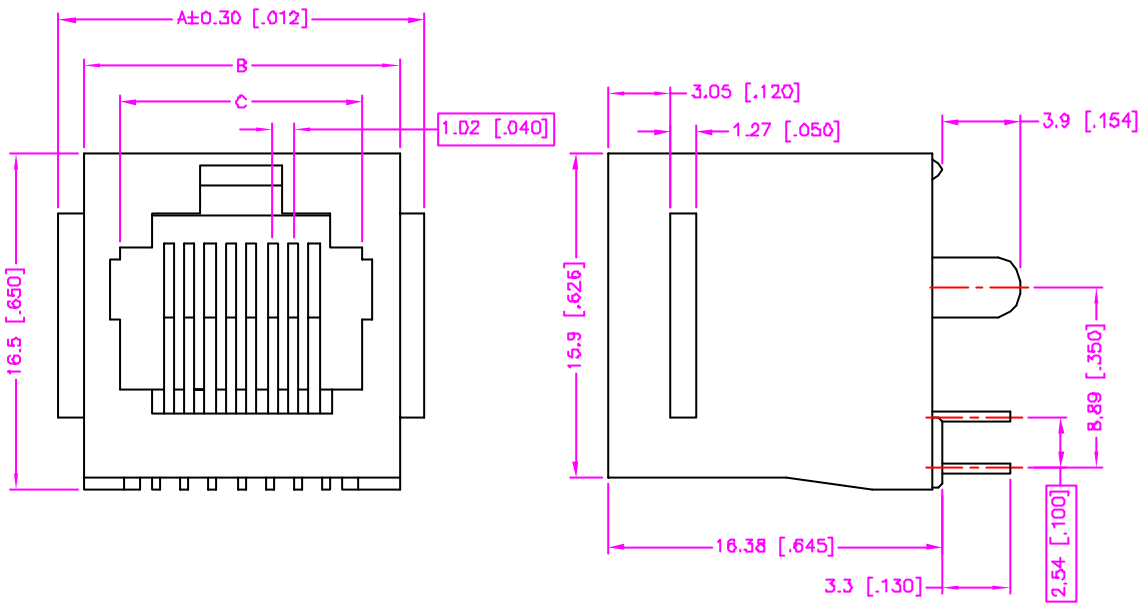

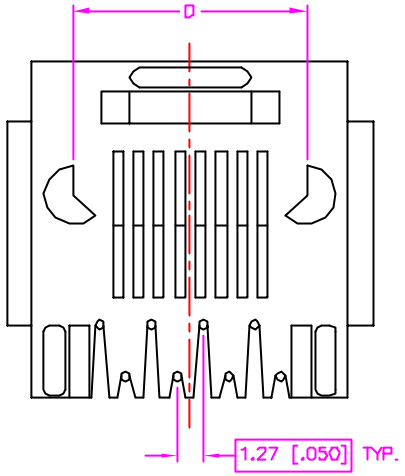

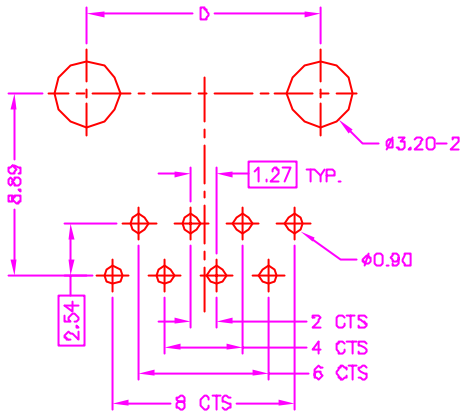

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. TERMINAL : ø0.45mm PHOSPHOR BRONZE.

SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +70°C.
6. DURABILITY : 750 CYCLES.

ORDER INFORMATION :

17 - 21 02 * - ** - * G

- SERIES CODE
- TYPE 02
- PANEL STOP OPTIONS
  - 1 : WITHOUT PANEL STOP
  - 2 : WITH PANLE STOP
- POSITION & CONTACT SEE TABLE
- CONTACT PLATING OPTIONS
  - 1 : GOLD FLASH
  - 2 : .000010" GOLD
  - 3 : .000015" GOLD
  - 5 : .000030" GOLD
  - 6 : .000050" GOLD
- GOLD PLATING ON SOLDER TAIL

NUMBER OF POSITIONS	NUMBER OF CONTACT	DIMENSIONS			
		A	B	C	D
4	2/4	13.80[.543]	11.43[.450]	7.85[.309]	7.62[.300]
6	2/4/6	15.90[.626]	13.46[.530]	9.90[.390]	10.16[.400]
8	2/4/6/8	17.90[.705]	15.50[.610]	11.85[.467]	11.43[.450]

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER SUE CHECK LION APP'D Kalherlin	Astron ASTRON TECHNOLOGY CORP.
	PRODUCT SPEC. —	NAME MODULAR JACK TOP ENTRY, ALL PLASTIC
UNITS : mm [inch]	509-0060	DRAW NO. C564-2104
SCALE NONE / SIZE A4	SHEET 1 OF 1 / REV. C	D8015