
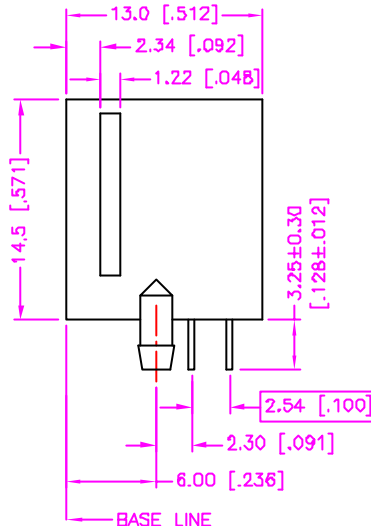


REV.	DESCRIPTION	DATE
—	RELEASE	Apr. 18, 2002
1	DRAW MODIFY	Jul. 22, 2003
2		

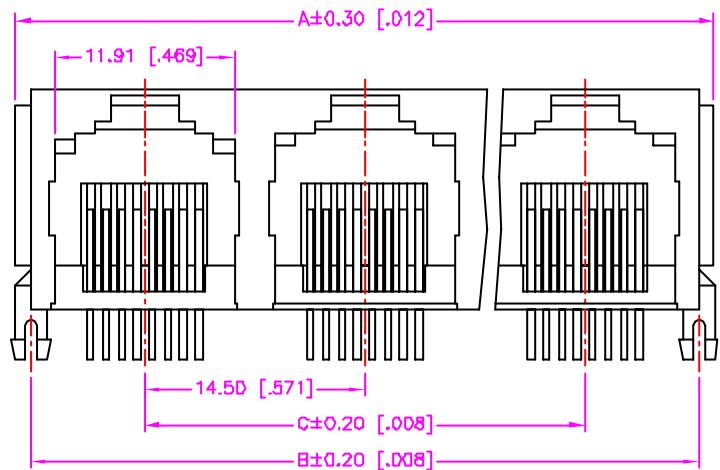



MATERIALS

1. HOUSING : POLYESTER (UL 94V-0).
2. TERMINAL : $\phi 0.45$ mm PHOSPHOR BRONZE.


SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO $+70^{\circ}\text{C}$.
6. DURABILITY : 750 CYCLES.

ORDER INFORMATION :

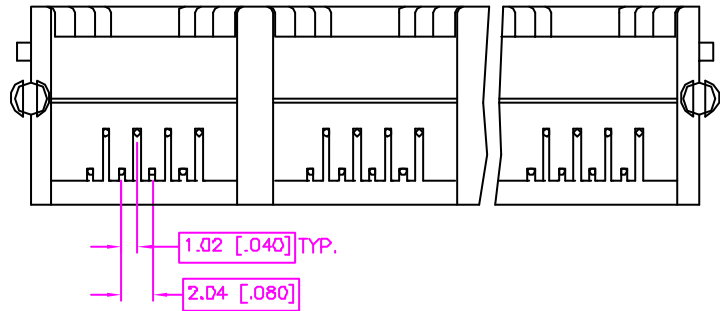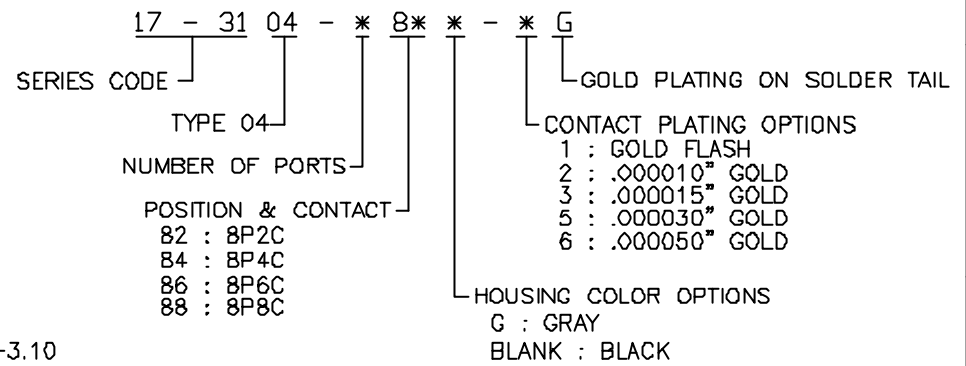

$A = (14.5 \times P) + 3.10$
 $(.571 \times P) + .122$
 $B = (14.5 \times P) + 0.50$
 $(.571 \times P) + .020$
 $C = 14.5 \times (P - 1)$
 $.571 \times (P - 1)$
 $P = \text{NUMBER OF PORTS}$

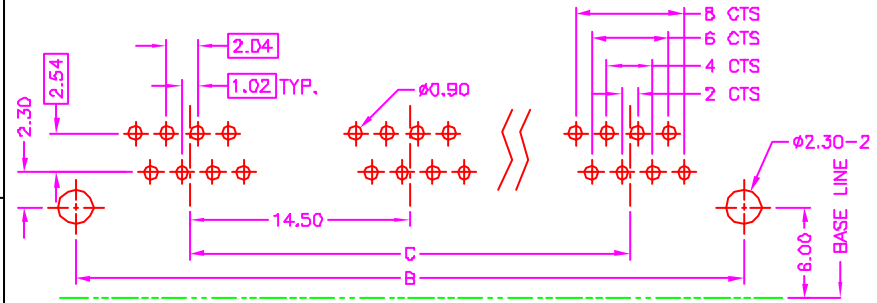

**RECOMMEND P.C.B. LAYOUT
TOP VIEW**

TOLERANCE .0 = ± 0.30 [.012] .00 = ± 0.20 [.008] .000 = ± .xxx .0000 = ± . ANG. = ± 3°	DRAWER <i>PUB</i>	 ASTRON TECHNOLOGY CORP.
	CHECK <i>Katherlin</i>	
 UNITS : mm [inch]	APP'D <i>LYON</i>	DRAW NO. C564-3105
SCALE NONE	SIZE A4	SHEET 1 OF 1
	REV. B	D8015