REV.	DESCRIPTION	DATE
—	RELEASE	Apr. 18, 2002
1	DRAW MODIFY	Jul. 22, 2003
2		

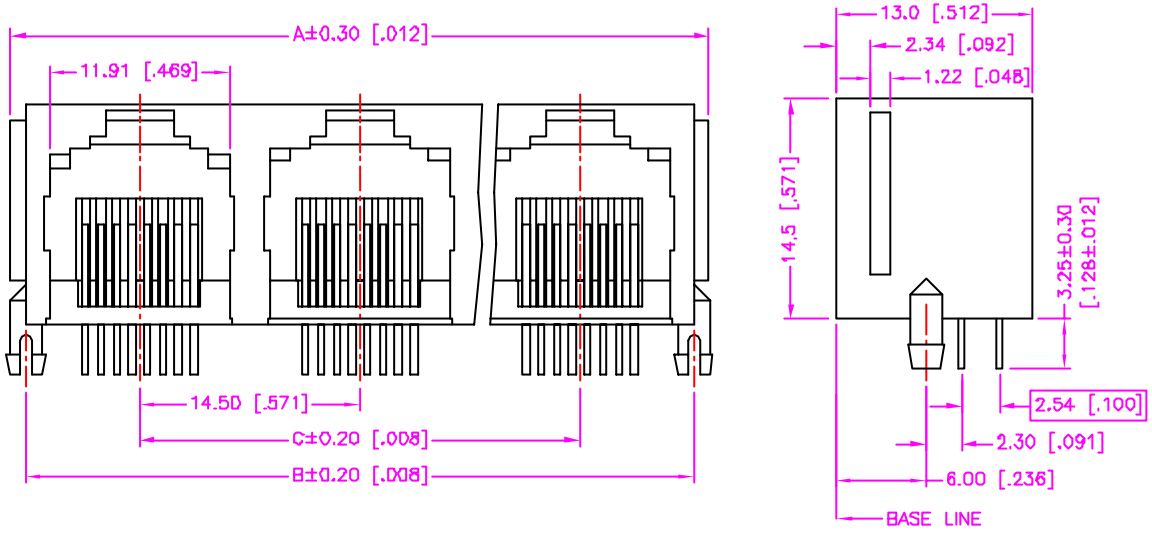

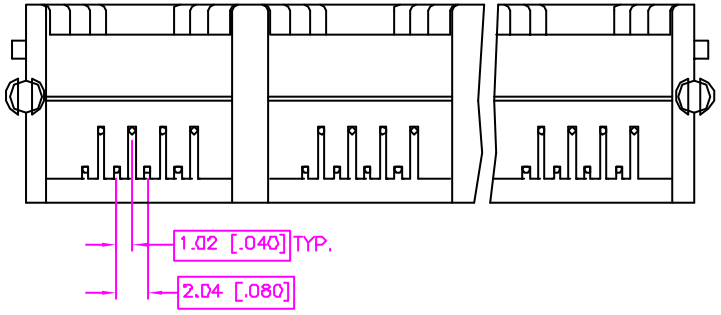

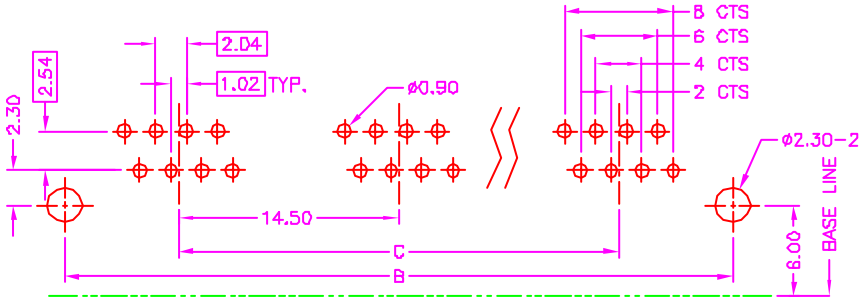

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : POLYESTER (UL 94V-0).
2. TERMINAL : ø0.45mm PHOSPHOR BRONZE.

SPECIFICATION

1. CURRENT RATING : 1.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +70°C.
6. DURABILITY : 750 CYCLES.

ORDER INFORMATION :

17 - 31 04 - * 8* * - * G

- 17 - 31 : SERIES CODE
- 04 : TYPE 04
- * : NUMBER OF PORTS
- 8* : POSITION & CONTACT
  - 82 : 8P2C
  - 84 : 8P4C
  - 86 : 8P6C
  - 88 : 8P8C
- * : HOUSING COLOR OPTIONS
  - G : GRAY
  - BLANK : BLACK
- * : CONTACT PLATING OPTIONS
  - 1 : GOLD FLASH
  - 2 : .000010" GOLD
  - 3 : .000015" GOLD
  - 5 : .000030" GOLD
  - 6 : .000050" GOLD
- G : GOLD PLATING ON SOLDER TAIL

A=(14.5xP)+3.10
(.571xP)+.122
B=(14.5xP)+0.50
(.571xP)+.020
C=14.5x(P-1)
.571x(P-1)
P=NUMBER OF PORTS

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER SUE	Astron ASTRON TECHNOLOGY CORP.	
	CHECK Katherlin		
	APP'D LION	NAME MODULAR GANG JACK SIDE ENTRY, ALL PLASTIC	
UNITS : mm [inch]	PRODUCT SPEC. —		
		DRAW NO. C564-3105	
SCALE NONE / SIZE A4	SHEET 1 OF 1 / REV. B	08015	