
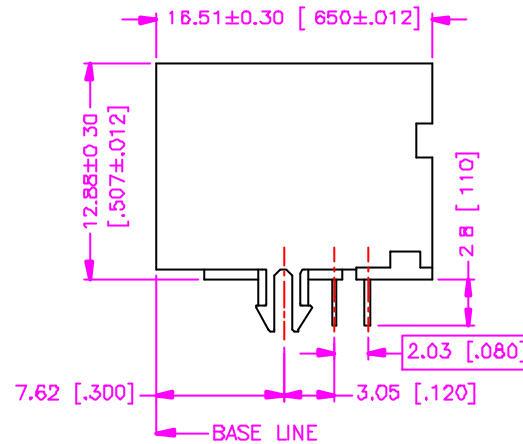


REV.	DESCRIPTION	DATE
—	RELEASE	May 08, 2002
1		
2		

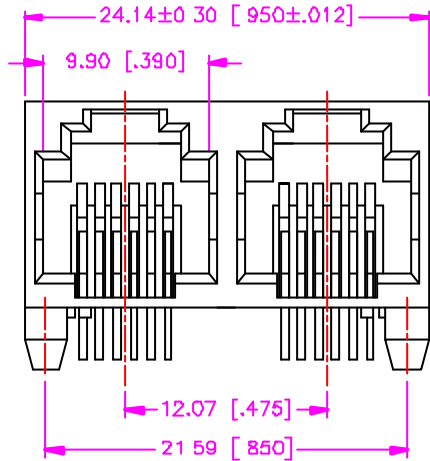




MATERIALS

- HOUSING : POLYAMIDE (UL 94V-0), BLACK.
- TERMINAL . PHOSPHOR BRONZE. (t=0.35mm)

SPECIFICATION

- CURRENT RATING : 1.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE . 500M OHMS MIN. AT 500V DC
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -40°C TO +70°C.
- DURABILITY : 750 CYCLES.

ORDER INFORMATION :

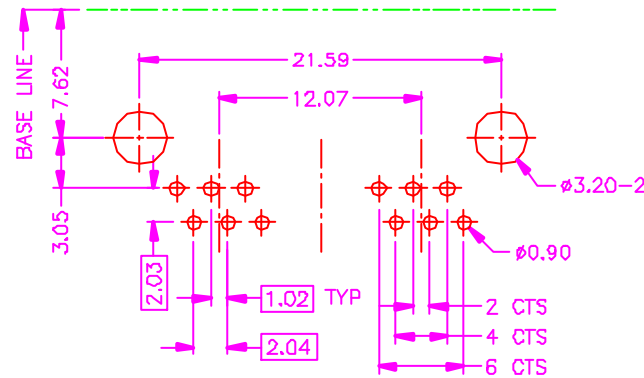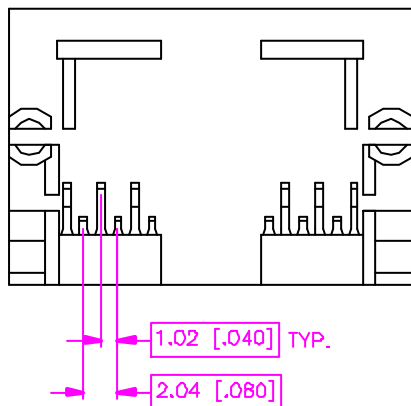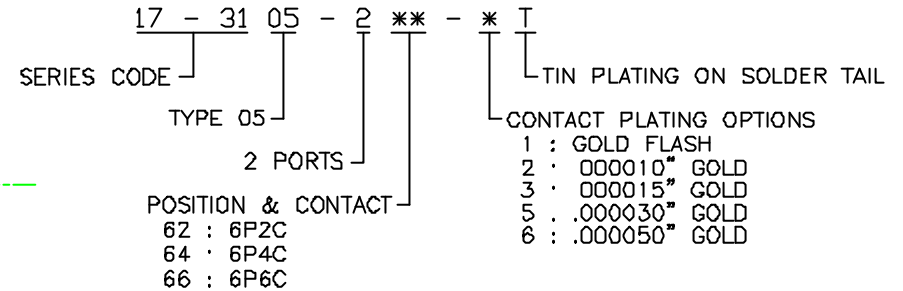

**RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW**

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=± ANG.=±3°	DRAWER <i>RUS</i>	 ASTRON TECHNOLOGY CORP.
	CHECK <i>Katherine</i>	
 UNITS : mm [Inch]	APP'D <i>WJ&LV</i>	DRAW NO. C564-3106
	SCALE NONE	SIZE A4
	REV. A	08015