
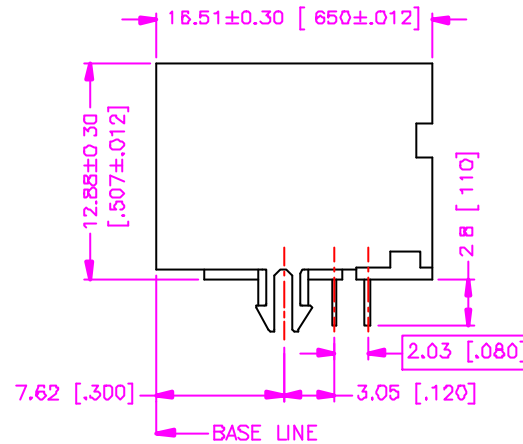


REV.	DESCRIPTION	DATE
—	RELEASE	May 08, 2002
1		
2		

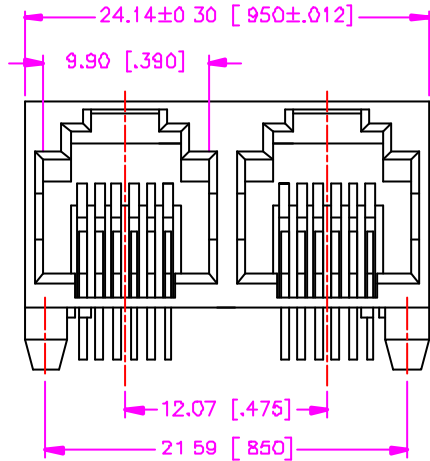




### MATERIALS

- HOUSING : POLYAMIDE (UL 94V-0), BLACK.
- TERMINAL . PHOSPHOR BRONZE. (t=0.35mm)

### SPECIFICATION

- CURRENT RATING : 1.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE . 500M OHMS MIN. AT 500V DC
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -40°C TO +70°C.
- DURABILITY : 750 CYCLES.

### ORDER INFORMATION :

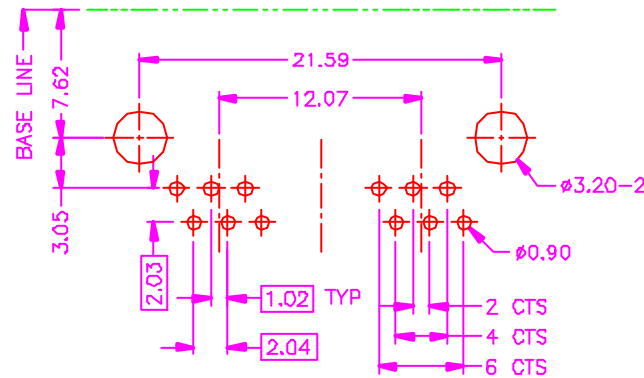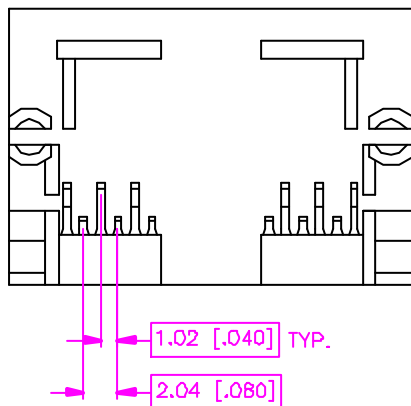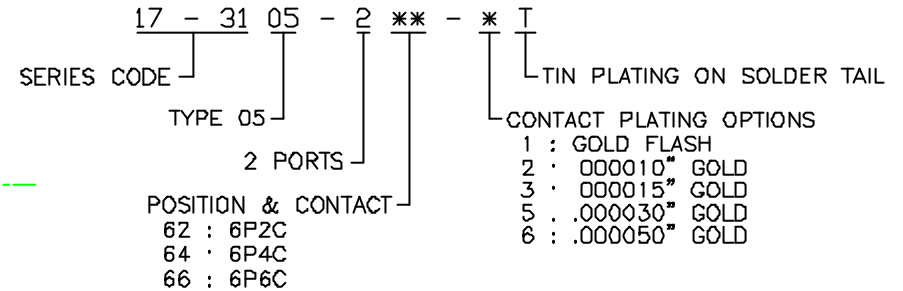

**RECOMMEND P.C.B. LAYOUT  
BOTTOM VIEW**

TOLERANCE .0±.0.30 [.012] .00±.0.20 [.008] .000±.XXX .0000± ANG.=±3°	DRAWER <i>RUS</i>	 <b>ASTRON TECHNOLOGY CORP.</b>
	CHECK <i>Katherine</i>	
 UNITS : mm [Inch]	APP'D <i>WJSELY</i>	DRAW NO. C564-3106
	PRODUCT SPEC. —	SCALE NONE SIZE A4 SHEET 1 DF 1 REV. A 08015